


	INTERNAL BLOWER STANDARD				
Min Max. CFM	200 - 700				
Min Max. Sones	0.8 - 6				

INTERNAL BLOWER with ACT™
AIRFLOW CONTROL TECHNOLOGY™*
200 - 590 | 200 - 390 | 200 - 290

*AIRFLOW CONTROL TECHNOLOGY** (ACT**) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.





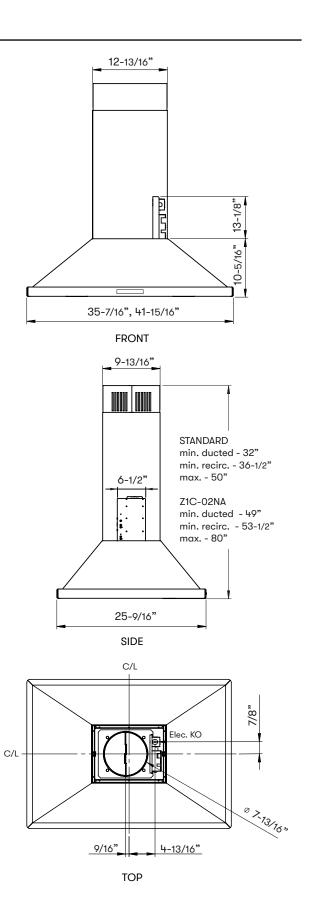

ISLAND



MODEL											
Stainless Steel			ODS	ZN	\-E42DS						
Size		36"		42'	42"						
RI ∩WED DEDE∩I	DMANCE										
BLOWER PERFORMANCE Blower CFM (Min Max.)		200 - 700		200) - 700						
Sones (Min Max.)		0.8 - 6			0.8 - 6						
ACT 590 CFM (Min Max.)		200 - 590			200 - 590						
ACT 390 CFM (Min Max.)		200 - 390			200 - 390						
ACT 290 CFM (Min Max.)		200 - 29	0	200	200 - 290						
FEATURES											
Zephyr Connect App Compatible		Yes									
Alexa & Google Home Compatible		Yes			Yes Yes						
ACT™ Technology		590, 390, 290		590	590, 390, 290						
Controls	,	Proximity Touch		Pro	ximity Touch						
Speed Levels		6*		6*	•						
Auto Delay-Off		Уes		Yes							
CleanAir Function		Yes			Yes						
Lighting		LumiLight LED, 6W x4		4 Lur	niLight LED, ć	5W x4					
Tri-Level Lighting		Yes			Yes						
Filters		Hybrid Baffle x2		Hyl Уеs	Hybrid Baffle x2						
Recirculating Op			Уes								
Quick-Lock Installation		Yes		Yes							
Magnetic Duct Covers		Yes		Yes V							
Extension Duct Cover Option		Yes, Up to 12' Ceiling Yes, with Zephur Connect			Yes, Up to 12' Ceiling Yes, with Zephur Connect						
ADA Compliant		or Remote			res, with Zephyr Connect or Remote						
		0		. .							
DUCT SPECIFICA											
Vertical Internal Blower		8" Round			Round						
Horizontal Internal Blower		NA			NA						
AC POWER		120V, 60Hz at Max. 5A		5A 120	120V, 60Hz at Max. 5A						
OPTIONAL ACCE	ESSORIES										
Wireless Remote Control		14000005			14000005						
Recirculating Kit		ZRC-03NA			ZRC-03NA						
Extension Duct Cover		Z1C-02NA			Z1C-02NA						
Make-Up Air Kit	MUA008	A800AUM A800AUM A800AUM									
MOUNTING HEIC	GHT RANGE**	24" - 34	,,	24'	- 34"						
WARRANTY		3 years	parts, 1 year	labor 3 y	ears parts, 1	year labor					
CEILING HEIGHT 8'		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'		
STANDARD DUCT COVER	Ducted Mounting I	Height*	24" - 28"	24" - 34"	24" - 34"	28" - 34"	34" - 34"	NA	NA	NA	
	Recirc Mounting H	eight*	NA	24" - 29.5"	24" - 34"	28" - 34"	34" - 34"	NA	NA	NA	
EXTENSION DUCT COVER	Ducted Mounting I	Height*	NA	NA	NA	24" - 29"	24" - 34"	24" - 34"	24" - 34"	28" - 34"	
	Recirc Mounting H	eight*	NA	NA	NA	24" - 24.5"	24" - 30.5"	24" - 34"	24" - 34"	28" - 34"	
	•								-		

^{*}When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 5 speeds, ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.

**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



Zephyr Connect App

Zephyr Connect App allows you to control your range hood from anywhere zepring connect app almoss god to control your range nood a roll any gour work god to control your range nood and provides important product information. All you need is a WiFi connection with access to the internet. It seamlessly integrates with your smart devices such as Amazon Alexa or Google Home smart speaker for voice activation. Available to download from Google Play or the App Store.



Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

PowerWave™ 3-Phase Blower Technology

delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency.

