

# HydroTap Classic Plus CS Tap

Product Spec Sheet



## HydroTap Classic Plus Chilled/Sparkling (CS) Tap

Offering the choice of instant, filtered chilled still and chilled sparkling water, the Classic Plus pairs iconic design with an intuitive touchpad making it the perfect complement to any space.

This HydroTap Classic Plus can be installed over the sink as a secondary tap or over our optional Classic Range Integrated or Classic Range Raised Font / Drip Tray.

The HydroTap Classic Plus is available in six finishes: Chrome, Brushed Chrome, Matte Black, Brushed Gold, Brushed Nickel and Gunmetal.

## HydroTap Classic Plus CS Tap - Available Finishes



Chrome



Brushed  
Chrome



Matte  
Black



Brushed  
Gold



Brushed  
Nickel



Gunmetal

## Product Order Codes for HydroTap Classic Plus CS Taps

HydroTap Classic Plus CS Tap in Chrome	01043226
HydroTap Classic Plus CS Tap in Brushed Chrome	01043497
HydroTap Classic Plus CS Tap in Matte Black	01043498
HydroTap Classic Plus CS Tap in Brushed Gold	01043499
HydroTap Classic Plus CS Tap in Brushed Nickel	01043501
HydroTap Classic Plus CS Tap in Gunmetal	01043500

Please see individual product spec sheets for command center and accessory product specs and order codes.

# HydroTap Classic Plus CS Tap

## Product Spec Sheet



### Installation Requirements


The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.

If using a drip tray (font) accessory, suitable drainage to a trapped waste is required within 3' (0.9m) of the installation. Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required.

Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations.

### HydroTap Classic Plus CS - Tap Specs

<b>Style:</b>	HydroTap Classic Plus Tap (CS)
<b>Hole Size:</b>	1 - 3/8" / 35mm
<b>Tap Height:</b>	8 1/2" (216mm) or 13 13/16" (351mm) when installed with an optional font / drip tray
<b>Installation:</b>	Over sink as a secondary tap or on optional font / drip tray
<b>Flow Rate:</b>	Max 1.8gpm / 6.8lpm
<b>Sparkling Water Flow Rate</b>	0.4 gpm / 1.5lpm
<b>Product Certifications:</b>	IAPMO - NSF/ANSI 372, 42, 53, CSA B438.1, ASSE 1087; cUL; CEC
<b>ADA Compliant:</b>	Yes

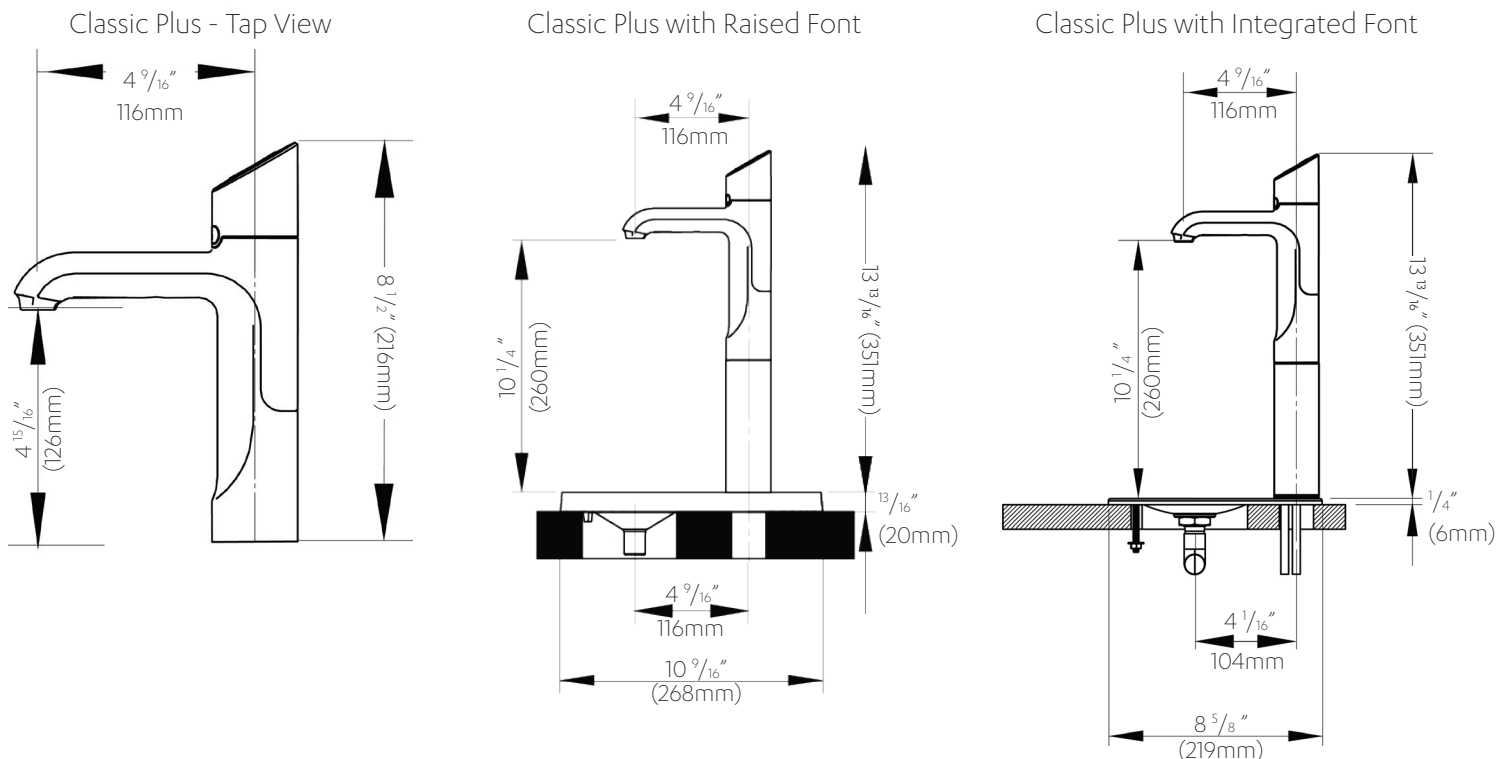

Installation by Zip Professional Service is available in select metro areas and can be arranged with a phone call to 1-833-233-2358 or by emailing [wecare@na.zipwater.com](mailto:wecare@na.zipwater.com). Technical Installation assistance over phone or video call can be obtained by calling our customer care line at 1-833-233-2358, Monday through Friday 8am - 5pm Central Time.