

# MONOGRAM BAR REFRIGERATOR

ZIFS240NSS



When ordering this product, be sure to use the model number associated with the chosen handle.



Statement handle  
ZXGPIH1PWSS



Minimalist handle  
ZXGPIH1CPSS

## MINIMALIST HANDLE

Model is shown with the Minimalist handle, which needs to be ordered separately. To order this handle use model number ZXGPIH1CPSS.



## DIGITAL TOUCH CONTROLS

Provide precise temperature settings for cooling all types of fresh foods and beverages, and an LED display allows easy viewing of temperatures

## STATEMENT AND MINIMALIST COLLECTION REFRIGERATOR HANDLES (SOLD SEPARATELY)

Designed to enhance choice and customization, Statement and Minimalist Collection refrigerators do not come with handles. Handles must be chosen separately and ordered through a Monogram representative

## SPACIOUS INTERIOR WITH REMOVABLE SPILLPROOF GLASS SHELVES AND QUICKSPACE SHELF AND CLEAR LEXAN CRISPER

Provides a spacious 5.4 cu. ft. capacity that can hold a platter as large as 18" x 18."

## SOFT INTERIOR LED LIGHTING

Automatically illuminates when the door is open, but can be activated by an internal on/off switch

## CONVENIENT 24" CONFIGURATION

Is fully finished on all sides to allow installation virtually anywhere in the home.

## FLUSH INSTALLATION CAPABLE

## SABBATH MODE

Designed to disable functions in accordance with Sabbath-observing practices




### SPECIFICATIONS

|                         |                                                                               |
|-------------------------|-------------------------------------------------------------------------------|
| Overall Width           | 23 7/16" (59.5 cm)                                                            |
| Overall Height          | 34 1/16" (86.5 cm)                                                            |
| Overall Depth           | 23 3/8" (59.3 cm)                                                             |
| Door Clearance          | 9 3/8" (23.8 cm) @ 110°<br>2" (5.1 cm) @ 90°<br>23 7/8" (60.6 cm) door length |
| Overall Capacity        | 4.25 cu. ft.                                                                  |
| Minimum Cabinet Width   | 24" (610 mm)                                                                  |
| Minimum Cabinet Depth   | 24" (61.0 cm)                                                                 |
| Cutout Width            | 23 7/8" (606 mm)                                                              |
| Cutout Height           | 34 1/2" (87.6 cm) Min<br>35" (88.9 cm) Max                                    |
| Electrical Requirements | 2.0 A                                                                         |
| Voltz/Hertz/Amps        | 120 V, 60 Hz, 15 or 20 amp circuit                                            |
| Shipping Weight         | 144 lb (65.5 kg)                                                              |


### ATTENTION ELECTRICIAN:

A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.


### OVERALL DIMENSIONS

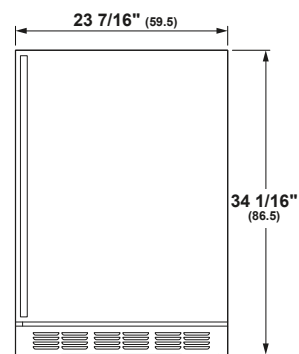

FRONT VIEW

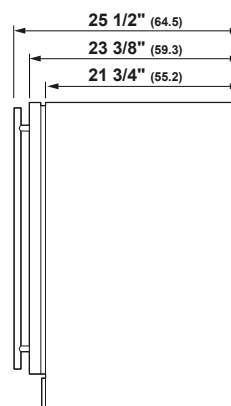

SIDE VIEW

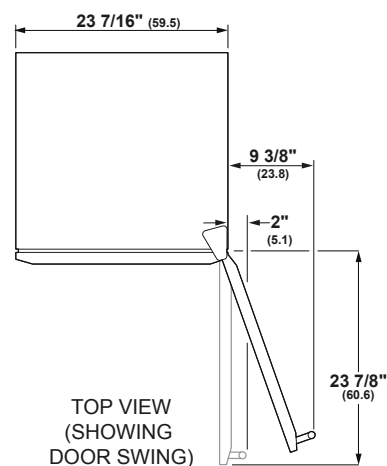


TOP VIEW  
(SHOWING  
DOOR SWING)


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

## INSTALLATION



### INSTALLATION CUTOUT SIDE VIEW

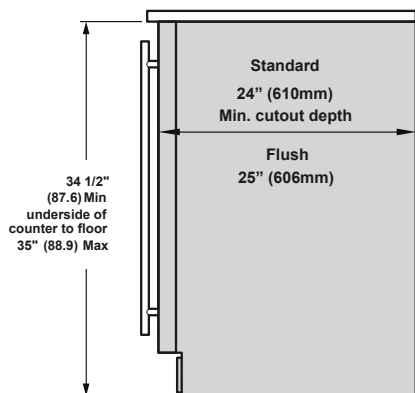

### INSTALLATION CUTOUT FRONT VIEW

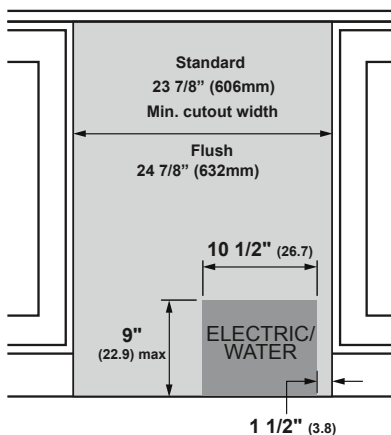

### REFRIGERATION MODULES, TOP VIEW

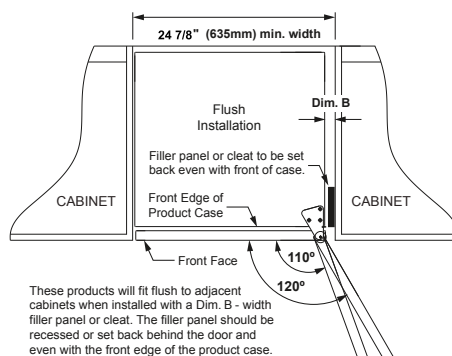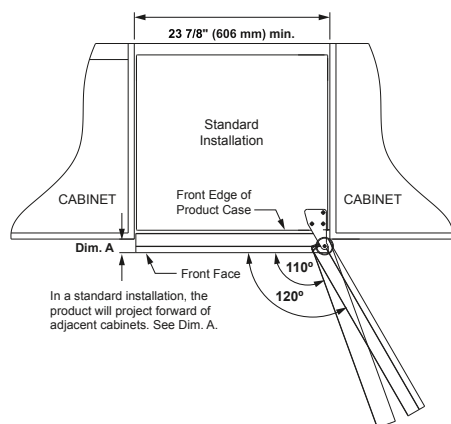

**PRODUCT**  
ZIFS240

**DIM. A**  
1"

**PRODUCT**  
ZIFS240

**DIM. B**  
1 1/8"

## NOTES

Please see **Installation Instructions** for detailed instructions and information

- **Installation Space**  
This module can be installed beneath a countertop or can be free-standing.
- **For a standard installation of stainless steel unit:** The product must be installed so that the front face will project 1" forward of adjacent cabinets.
- **For a flush installation of stainless steel unit:** Install a 1 1/8" wide filler strip on the hinge side. The width of the opening must be 24 7/8" (632mm) wide. See installation instructions for details.
- **Location Requirements:** All Monogram Refrigeration Modules may be closed in on the top and sides as long as the front is unobstructed for air circulation and door swing.

Do not install these products where the temperatures will go below 55° F (13 C) or above 90° F (32 C).

Products must operate from separate properly grounded receptacles.

These products are not designed to be stacked one over the other.

See installation instructions for side-by-side information.