


### MVHP432ME2CA

MRV 5 Series Heat Pump  
36 Tons

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Tag: \_\_\_\_\_

Reference                      Approval                      Construction

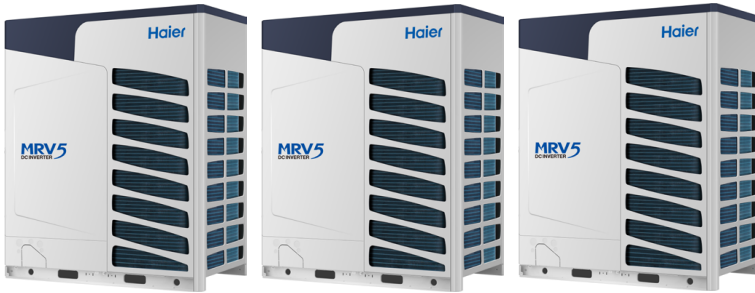

### Specifications

#### Performance<sup>1</sup>

Cooling Capacity	400,000 Btu/h
Heating Capacity	420,000 Btu/h
EER (ducted/non-ducted)	9.50/9.50
IEER (ducted/non-ducted)	17.00/17.20
SCHE (ducted/non-ducted)	N/A
COP 47F (ducted/non-ducted)	3.20/3.20

#### Technical Details

Compressor Type	DC Inverter 1+1+1
Compressor RLA	<i>refer to next page</i>
Condenser Fan Qty	2+2+2
Condenser Fan Type	Propeller
Condenser Fan CFM	10,500 + 10,500 + 10,500
Factory Refrigerant Charge	43.65 + 43.65 + 43.65 lb

#### Electrical

Voltage (V / Ø / Hz)	208-230 / 3 / 60
Minimum Circuit Ampacity (MCA)	58.9A + 58.9A + 58.9A
Maximum Overcurrent Protection	80A + 80A + 80A

#### Sound Levels<sup>2</sup>

Sound Power Level, dB(A)	83+83+83
--------------------------	----------

#### Piping

Total System length	3280 ft.
ODU to furthest IDU	722 ft.
ODU above IDU	295 ft.
ODU below IDU	361 ft.

### Features and Benefits

- Optimized, intelligent control with all DC inverter EVI compressor technology achieves high efficiency performance with high reliability
- Wide range of operation from -13°F (-25°C) to 122°F (50°C)
- IEER performance up to 25.0
- COP performance up to 3.6
- Delivers 80% of rated heating capacity at 5°F (-15°C)
- Four-sided heat exchanger reduces chassis footprint
- Hinged electrical box design for ease of access to system components
- Factory standard black fin anti corrosion coating
- Nighttime quiet operation reduces sound levels by 10 dB(A)
- Automatic oil balancing eliminates the need for oil balancing piping
- 10 year limited parts and compressor warranty<sup>2</sup>

### Notes

1. Cooling and heating capacities are based on the following temperatures:  
 Cooling Indoor: 80°F DB, 67°F WB  
 Cooling Outdoor: 95°F DB  
 Heating Indoor: 70°F DB  
 Heating Outdoor: 47°F WB, 43°F WB
2. Refer to warranty documentation for complete warranty details.
3. Refer to installation manual for complete installation requirements.




**MVHP432ME2CA**  
 MRV 5 Series Heat Pump  
 36 Tons

	Module 1 MVHP144ME2CA	Module 2 MVHP144ME2CA	Module 3 MVHP144ME2CA
<b>Technical Details</b>			
Compressor Type	DC Inverter x 2	DC Inverter x 2	DC Inverter x 2
Compressor RLA	20.5+20.5 A	20.5+20.5 A	20.5+20.5 A
Condenser Fan Qty	2	2	2
Condenser Fan Type	Propeller	Propeller	Propeller
Condenser Fan CFM	10,500	10,500	10,500
Factory Refrigerant Charge	43.65 lbs.	43.65 lbs.	43.65 lbs.
<b>Electrical</b>			
Voltage (V / Ø / Hz)	208-230 / 3 / 60	208-230 / 3 / 60	208-230 / 3 / 60
Minimum Circuit Ampacity (MCA)	58.9 A	58.9 A	58.9 A
Maximum Overcurrent Protection	80 A	80 A	80 A
<b>Sound Levels<sup>2</sup></b>			
Sound Power Level, dB(A)	83	83	83
<b>Dimensions</b>			
Height (in.)	66 1/2	66 1/2	66 1/2
Width (in.)	55 1/2	55 1/2	55 1/2
Depth (in.)	29 1/2	29 1/2	29 1/2
Weight (lb.)	871	871	871
<b>Piping</b>			
Connections, Liquid/Gas	5/8" x 1 1/8"	5/8" x 1 1/8"	5/8" x 1 1/8"

### Dimensional Drawings

MVHP144ME2CA

Unit: inch (mm)

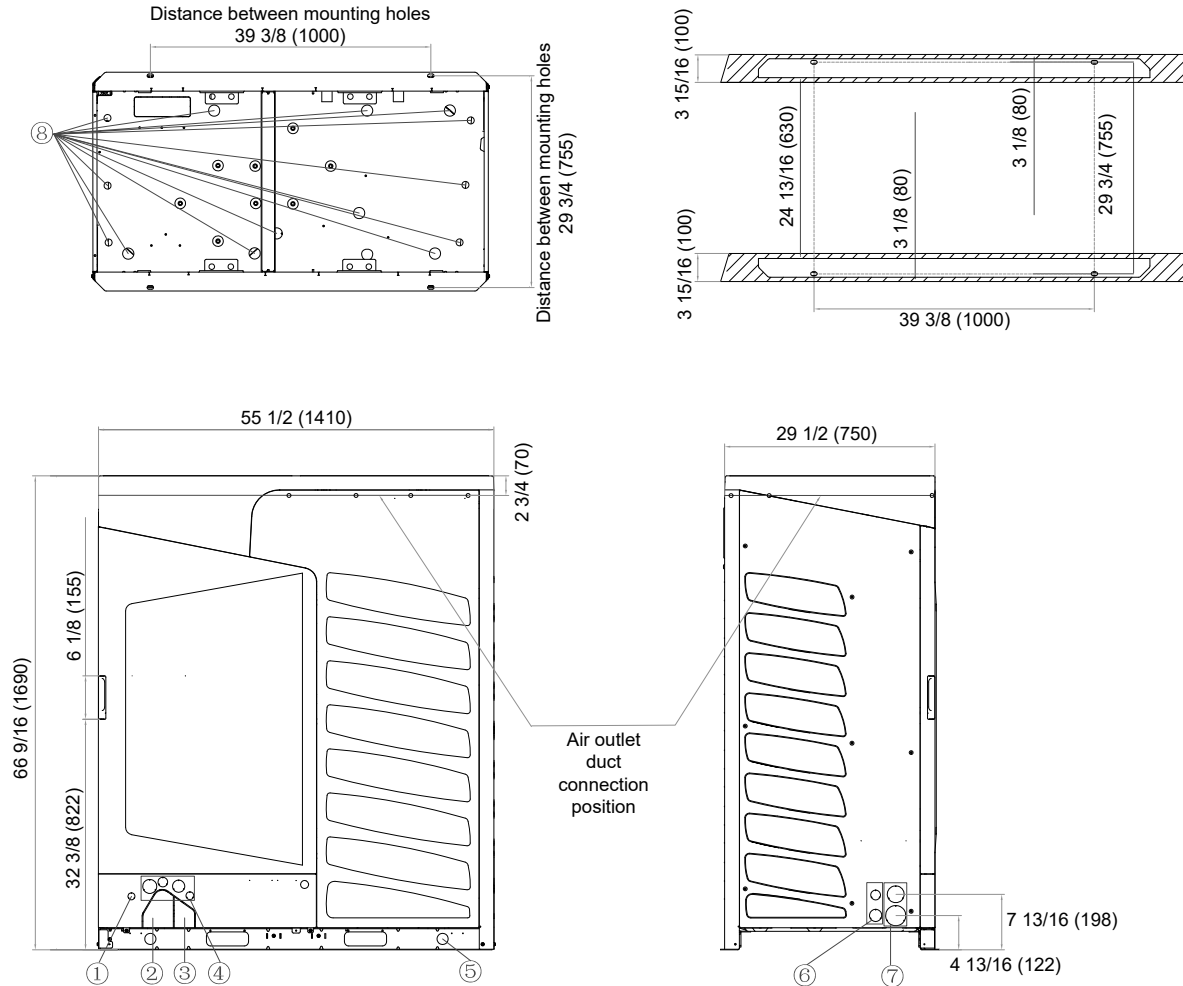

No.	Name	Remark
①	Signal line opening (1)	Use rubber grommet for protection
②	Pipe outlet for 2-pipe system	
③	Pipe outlet for 3-pipe system	
④	Power supply opening (2 / 1-2/5)	According to the wire diameter size to choose the appropriate line opening, and using the line sheath in the unit's attachment for protection.
⑤	Hoisting opening (1-3/5)	
⑥	Power supply of signal line opening (1-2/5 / 1-3/4)	
⑦	Refrigerant pipe outlet (2-2/5 / 2-4/5)	
⑧	Drain opening	