84" HIGH INTEGRATED REFRIGERATION

PLANNING GUIDE

SERIES 11

FREEZERS | RS1884FRJE1 | RS1884FLJE1 | RS2484FRJE1 | RS2484FLJE1 | RS3084FLJE1 | RS3084FRJE1

REFRIGERATORS | RS2484SRHE1 | RS2484SLHE1 | RS3084SRHE1 | RS3084SLHE1

WINE CABINET | RS2484VL2K1 | RS2484VR2K1

REFRIGERATOR FREEZERS | RS2484WRUE1 | RS2484WLUE1 | RS3084WRUE1 | RS3084WLUE1 | RS3684WRUVE1 | RS3684WLUVE1

FRENCH DOOR REFRIGERATOR FREEZER | RS3684AUVE1

SERIES 9

FREEZERS | RS1884FLJK1 | RS2484FLJK1 | RS3084FLJK1

REFRIGERATORS | RS2484SRHK1 | RS2484SLHK1 | RS2484SRK1 | RS2484SLK1 | RS3084SRHK1 | RS3084SLHK1 | RS3084SRK1 | RS3084SLK1

REFRIGERATOR FREEZER RS2484WRUK1 | RS2484WLUK1 | RS3084WRUK1 | RS3084WLUK1

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown.
This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

High-level product information for the initial stages of conceptualising and refining your design.

Detailed information, including product specs and dimensions, to support you in the advanced design stages.

CONCEPT DESIGN

Product overview
- Series 11 - 84″ Refriger
- Series 9 - 84″ Refrigeration overview **5**

Specification guide
- Series 11 Specification Guide **7**
- Series 11 French Door Refrigerator Freezer **8**
- Series 9 Specification Guide **9**

Accessories
- Handles **11**
- Handle fixing holes **12**
- Stainless steel panels **13**

DEVELOPED AND DETAILED DESIGN

Data sheets
- 18″ Freezer **15**
- 24″ Single door models **16**
- 24″ Refrigerator Freezer **17**
- 24″ Wine cabinet **18**
- 30″ Single door models **19**
- 30″ Refrigerator Freezer **20**
- 36″ Refrigerator Freezer **21**
- 36″ French door refrigerator freezer **22**

Planning considerations
- Cavity specifications **24**
- Door swing clearances **25**
- Custom toe kicks - low and high **26**

Hinge articulation
- KO5 Hinge **28**
- Panel styles **29**

D DETAILED DESIGN **PAGE**

eparation
- 18″ Freezer **31**
- Single door models 24″ and 30″ **32**
- Wine cabinet **33**
- Refrigerator freezers **34**
- French door refrigerator freezer **35**


Services
- 18″ Freezer **37**
- 24″ Models **38**
- 30″ Models **39**
- 36″ Models **40**

© FISHER & PAYKEL APPLIANCES LIMITED 2026

PRODUCT OVERVIEW


© FISHER & PAYKEL APPLIANCES LIMITED 2026

REFRIGERATION

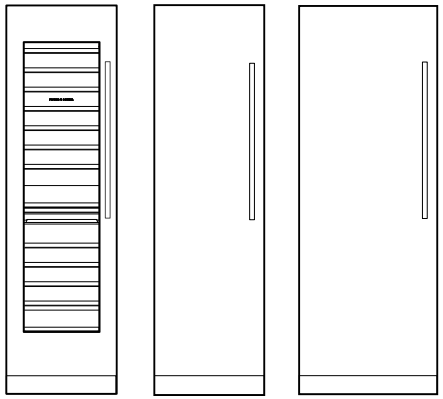


① ② ③

REFRIGERATOR FREEZER

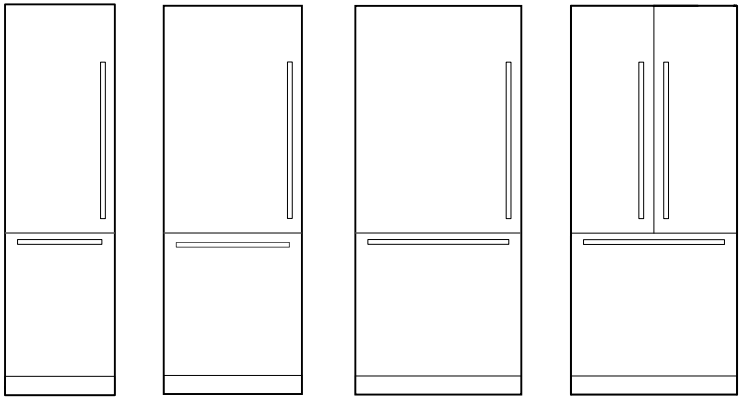

④ ⑤ ⑥ ⑦

FREEZER

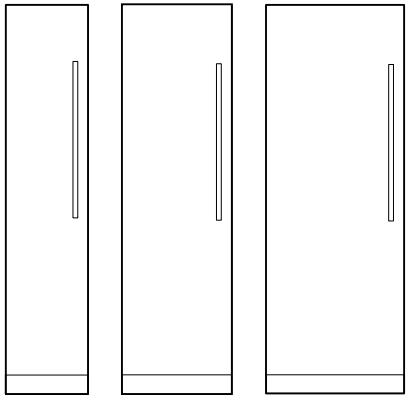

⑧ ⑨ ⑩

PRODUCT	MODEL	
	Left hand hinge	Right hand hinge
① **24″ Wine Cabinet** 91 bottle capacity, optional display capability. Two independent temperature zones, four wine modes.	RS2484VL2K1	RS2484VR2K1
② **24″ Integrated Refrigerator** Custom panel ready, 12.4cu capacity with internal water dispenser.	RS2484SLHE1	RS2484SRHE1
③ **30″ Integrated Refrigerator** Custom panel ready, 16.3cu capacity with internal water dispenser.	RS3084SLHE1	RS3084SRHE1


PRODUCT	MODEL	
	Left hand hinge	Right hand hinge
④ **24″ Integrated Refrigerator-Freezer** Custom panel ready, 12.1cu capacity, internal ice maker and water dispenser.	RS2484WLUE1	RS2484WRUE1
⑤ **30″ Integrated Refrigerator-Freezer** Custom panel ready, 15.9cu capacity, internal ice maker and water dispenser.	RS3084WLUE1	RS3084WRUE1
⑥ **36″ Integrated Refrigerator-Freezer** Custom panel ready, 19.2cu capacity, internal ice maker and water dispenser.	RS3684WLUVE1	RS3684WRUVE1
⑦ **36″ Integrated Refrigerator-Freezer, French Door** Custom panel ready, 19.2cu capacity, internal ice maker and water dispenser.	RS3684AUVE1	

PRODUCT	MODEL	
	Left hand hinge	Right hand hinge
⑧ **18″Freezer with Ice** Custom panel ready, 7.8cu, with internal ice maker.	RS1884FLJE1	RS1884FRJE1
⑨ **24″ Integrated Freezer with ice** Custom panel ready, 11.9cu capacity with internal ice maker.	RS2484FLJE1	RS2484FRJE1
⑩ **30″ Integrated Freezer with ice** Custom panel ready, 15.6cu capacity with internal ice maker	RS3084FLJE1	RS3084FRJE1

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026


REFRIGERATION

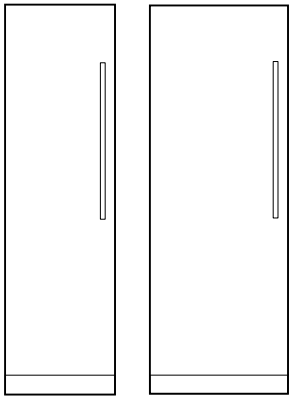

① ②

PRODUCT	MODEL	
	Left hand hinge	Right hand hinge
① **24″ Integrated Refrigerator** Custom panel ready, with 12.4cu capacity	RS2484SLK1	RS2484SRK1
24″ Integrated Refrigerator with water Custom panel ready, 12.4cu with internal water dispenser.	RS2484SLHK1	RS2484SRHK1
② **30″ Integrated Refrigerator** Custom panel ready, 16.3cu capacity.	RS3084SLK1	RS3084SRK1
30″ Integrated Refrigerator with water Custom panel ready, 16.3cu with internal water dispenser.	RS3084SLHK1	RS3084SRHK1


REFRIGERATOR FREEZER

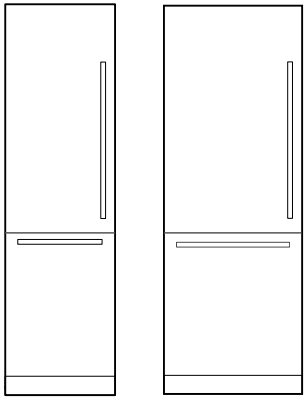

③ ④

PRODUCT	MODEL	
	Left hand hinge	Right hand hinge
③ **24″ Integrated Refrigerator-Freezer** Custom panel ready, 12.1cu capacity, internal ice maker and water dispenser.	RS2484WLUK1	RS2484WRUK1
④ **30″ Integrated Refrigerator-Freezer** Custom panel ready, 15.9cu capacity, internal ice maker and water dispenser.	RS3084WLUK1	RS3084WRUK1

FREEZER

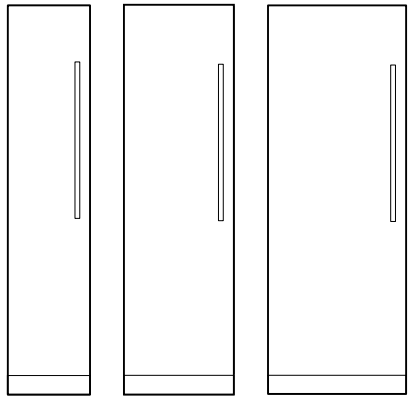

⑤ ⑥ ⑦

PRODUCT	MODEL	
	Left hand hinge	Right hand hinge
⑤ **18″Freezer with Ice** Custom panel ready, 7.8cu, with internal ice maker.	RS1884FLJK1	
⑥ **24″ Integrated Freezer with ice** Custom panel ready, 11.9cu capacity with internal ice maker.	RS2484FLJK1	
⑦ **30″ Integrated Freezer with ice** Custom panel ready, 15.6cu capacity with internal ice maker.	RS3084FLJK1	

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

SPECIFICATION GUIDE

© FISHER & PAYKEL APPLIANCES LIMITED 2026



RS2484FRJE1, RS2484SRHE1 - with Custom Door Panel



RS3684WRUVE - with Custom Door Panel

OVERVIEW

Experience the pinnacle of refrigeration design with our most advanced Columns. Featuring elegant interiors and options for ice and water, these models embody premium functionality and style. Engineered for energy efficiency, they seamlessly integrate alone or paired. Available in various sizes, they ensure a perfect fit for any kitchen.

FEATURES

1. Premium interior for a refined look and feel, this model is the highlight of our Integrated Columns collection
2. Designed for optimal energy performance and maximum efficiency
3. Mix and match columns, install separately or pair together
4. Seamless fit with only ⅛" gaps, featuring no visible hinges or grilles
5. Customize with kitchen cabinetry or a stainless steel door panel accessory
6. Two Variable Temperature Zones with options for Fridge, Pantry, Chill, Freeze, Soft Freeze, and Deep Freeze modes
7. Intuitive, easy-to-use touchscreen interface with Wi-Fi compatibility
8. Flexible installation with left or right hinge options
9. Joining kit for pairing units; front adjustable levelling feet for easy installation
10. ActiveSmart™ technology maintains ideal temperature for fresher food

PRODUCT OVERVIEW

REFRIGERATION

RS2484VL2K1, RS2484VR2K1
Integrated Column Wine Cabinet, 24"

RS2484SRHE1, RS2484SLHE1
Integrated Refrigerator, 24", Water

RS3084SRHE1, RS3084SLHE1
Integrated Refrigerator, 30", Water

FREEZER

RS1884FRJE1, RS1884FLJE1
Integrated Freezer, 18", Ice

RS2484FRJ1, RS2484FLJE1
Integrated Freezer, 24", Ice

RS3084FRJE1, RS3084FLJE1
Integrated Freezer, 30", Ice

REFRIGERATOR FREEZER

RS2484WRUE, RS2484WLUE
Integrated Refrigerator Freezer, 24", Ice & Water

RS3084WRUE1, RS3084WLUE1
Integrated Refrigerator Freezer, 30", Ice & Water

RS3684WRUVE, RS3684WLUVE1
Integrated Refrigerator Freezer, 36", Ice & Water

RS3684WRUVE, RS3684WLUVE1
Integrated Refrigerator Freezer, 36", Ice & Water

FRENCH DOOR REFRIGERATOR FREEZER

RS3684AUVE1
Integrated French Door Refrigerator Freezer, 36", Ice & Water

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com





RS3684AUVE

OVERVIEW

Experience the pinnacle of refrigeration design with our most advanced model. Featuring an elegant interior, this refrigerator embodies premium functionality and style.

Designed to optimise energy efficiency, it comes complete with an ice maker and internal water dispenser.

PRODUCT OVERVIEW

RS3684AUVE1
Integrated French Door Refrigerator Freezer, 36", Ice & Water


FEATURES

1. Space-saving French Door design, ideal for island or galley style kitchens
2. Designed for optimal energy performance and maximum efficiency
3. Enjoy convenient access to fresh, chilled water and ice with the internal water dispenser and ice maker
4. Seamless fit with only ⅛" gaps, featuring no visible hinges or grilles
5. Customize with kitchen cabinetry or a stainless steel door panel accessory
6. Variable Temperature Drawer with Chill, Fridge, and Pantry modes for optimal food care
7. Intuitive, easy-to-use touchscreen interface with Wi-Fi compatibility
8. The premium design and finish include a steel interior lining, full-extension metal shelf runners for easy access, robust glass shelving, and drawers with quality hinges designed for daily use
10. ActiveSmart™ technology maintains ideal temperature for fresher food

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



RS3084WRUK1, RS3084WLUK1 - with Custom Door Panels

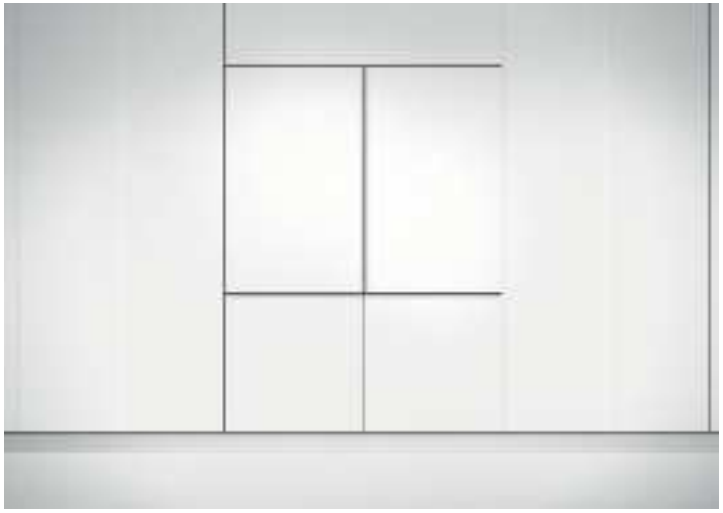

RS3084WRUK1, RS3084WLUK1 - with Custom Door Panels

OVERVIEW

These Integrated Columns offer seamless design, flexible installation, and the ability to customize to match existing cabinetry. Features include two Variable Temperature Zones, bright LED lighting, and ActiveSmart™ technology for optimal freshness. With options for internal ice makers, joining kits, and premium finishes, these models provide lasting durability and a sleek design.

FEATURES

1. Customize with kitchen cabinetry or a stainless steel door panel accessory
2. Seamless fit with only ⅛" gaps, featuring no visible hinges or grilles
3. Mix and match columns, install separately or pair together
4. Two Variable Temperature Zones with options for Fridge, Pantry, Chill, Freeze, Soft Freeze, and Deep Freeze modes
5. Flexible installation with left or right hinge options
6. Intuitive, easy-to-use touchscreen interface with Wi-Fi compatibility
7. ActiveSmart™ technology maintains ideal temperature for fresher food
8. Bright LEDs illuminate ceiling, shelves, bins, and tray
9. Joining kit for pairing units; front adjustable levelling feet for easy installation
10. Premium finish with robust materials for long-lasting durability and sleek aesthetic

PRODUCT OVERVIEW

REFRIGERATION

RS2484SRK1, RS2484SLK1
Integrated Column Refrigerator, 24"

RS2484SRHK1, RS2484SLHK1
Integrated Column Refrigerator, 24", Water

RS3084SRK1, RS3084SLK1
Integrated Column Refrigerator, 30"

RS3084SRHK1, RS3084SLHK1
Integrated Column Refrigerator, 30", Water

FREEZER

RS1884FLJK1
Integrated Column Freezer, 18", Ice

RS2484FLJK1
Integrated Column Freezer, 24", Ice

RS3084FLJK1
Integrated Column Freezer, 30", Ice & Water

REFRIGERATOR FREEZER

RS2484WRUK1, RS2484WLUK1,
Integrated Refrigerator Freezer, 30", Ice & Water


RS3084WRUK1, RS3084WLUK1
Integrated Refrigerator Freezer, 30", Ice & Water

All models can achieve opposite hinge location using hinge kits


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

ACCESSORIES

© FISHER & PAYKEL APPLIANCES LIMITED 2026

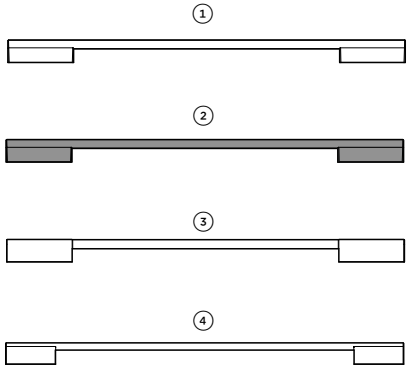


CONTEMPORARY

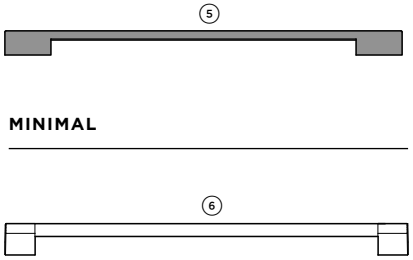


MINIMAL

CLASSIC

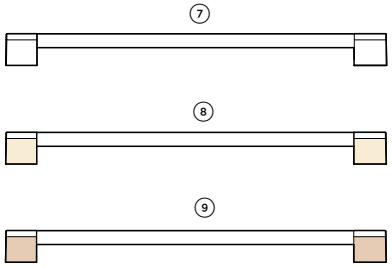

PROFESSIONAL ROUND

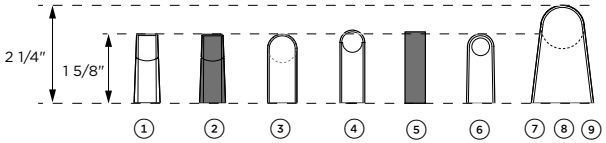



PROFILES


HANDLE	FINISH	SINGLE DOOR MODELS	24" REFRIGERATOR FREEZER	30" REFRIGERATOR FREEZER	36" REFRIGERATOR FREEZER	36" FRENCH DOOR
① Contemporary Square Fine	Aluminium	AHD5RDSF	AHD5RD2484W	AHD5RD3084W	AHD5RD3684W	
② Contemporary Square Fine	Black	AHD5RDSFB	AHD5RD2484WB	AHD5RD3084WB	AHD5RD3684WB	
③ Contemporary Round	Aluminium	AHSRD84	AHSRD2484W	AHSRD3084W	AHSRD3684W	
④ Contemporary Silver	Brushed silver	AHD7RDSFX	AHD7RD2484WX	AHD7RD3084WX	AHD7RD3084WX	AHD7RD3684AX
⑤ Minimal Black	Black	AHM1RDSFB	AHM1RD2484WB	AHM1RD3084WB	AHM1RD3684WB	AHM1RD3684AB
⑥ Classic Handle	Aluminium	AHCLRDSF	AHCLRD2484W	AHCLRD3084W	AHCLRD3684W	
⑦ Professional Round	Aluminium handle and standoff	AHC-RD84	AHCRD2484W	AHCRD7621W	AHCRD3684W	AHP3RD3684A
⑧ Professional Round	Aluminium handle and brass standoff	AHP3RDSFBA	AHP3RD2484WBA	AHP3RD3084WBA	AHP3RD3684WBA	AHP3RD3684ABA
⑨ Professional Round	Aluminium handle and dark copper standoff	AHP3RDSFDC	AHP3RD2484WDC	AHP3RD3084WDC	AHP3RD3684WDC	AHP3RD3684ADC

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

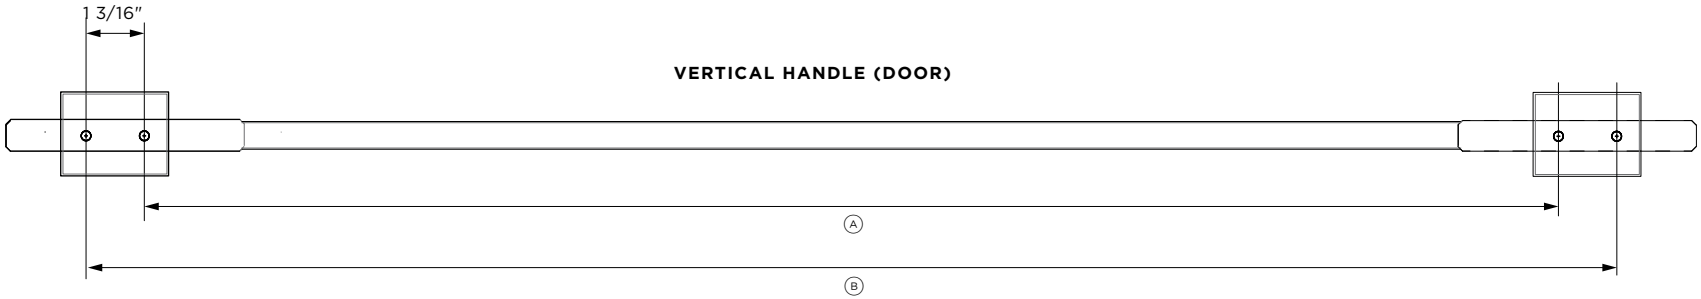

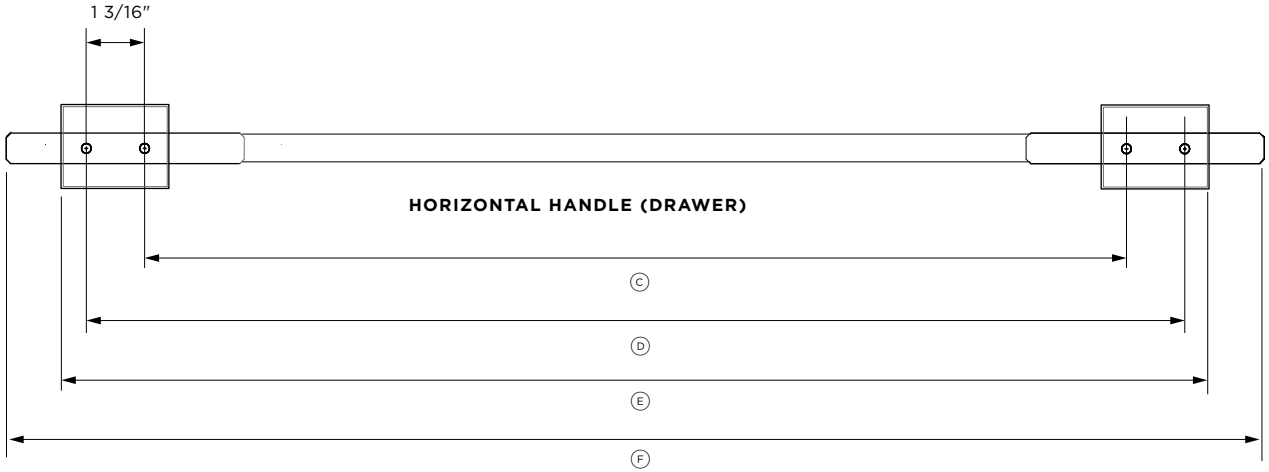



SOCKET SCREWS

M5 X 25mm Pan Head Socket Screw (4 per handle) suits standard 3/4" (3/4") panel. Thicker panels may require counter-boring or longer screws.

SINGLE DOOR MODELS

VERTICAL HANDLE	in	mm
Ⓐ Length between inner screws	28 1/32	712
Ⓑ Length between outer screws	30 13/32	773

24" REFRIGERATOR FREEZER MODELS

VERTICAL HANDLE	in	mm
Ⓐ Length between inner screws	23 3/32	587
Ⓑ Length between outer screws	25 15/32	647
HORIZONTAL HANDLE		
Ⓒ Length between inner screws	13 29/32	353
Ⓓ Length between outer screws	16 9/32	414
Ⓔ Overall length - Professional Round	14 7/16	367
Ⓕ Overall length - Contemporary	19 7/16	494


30" REFRIGERATOR FREEZER MODELS

VERTICAL HANDLE	in	mm
Ⓐ Length between inner screws	23 3/32	587
Ⓑ Length between outer screws	25 15/32	647
HORIZONTAL HANDLE		
Ⓒ Length between inner screws	19 29/32	506
Ⓓ Length between outer screws	22 9/32	566
Ⓔ Overall length - Professional Round	22 27/32	580
Ⓕ Overall length - Contemporary	22 7/16	646

36" REFRIGERATOR FREEZER MODELS

VERTICAL HANDLE	in	mm
Ⓐ Length between inner screws	23 3/32	587
Ⓑ Length between outer screws	25 15/32	647
HORIZONTAL HANDLE		
Ⓒ Length between inner screws	25 29/32	658
Ⓓ Length between outer screws	28 9/32	718
Ⓔ Overall length - Professional Round	28 13/16	748
Ⓕ Overall length - Contemporary	31 13/32	798

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

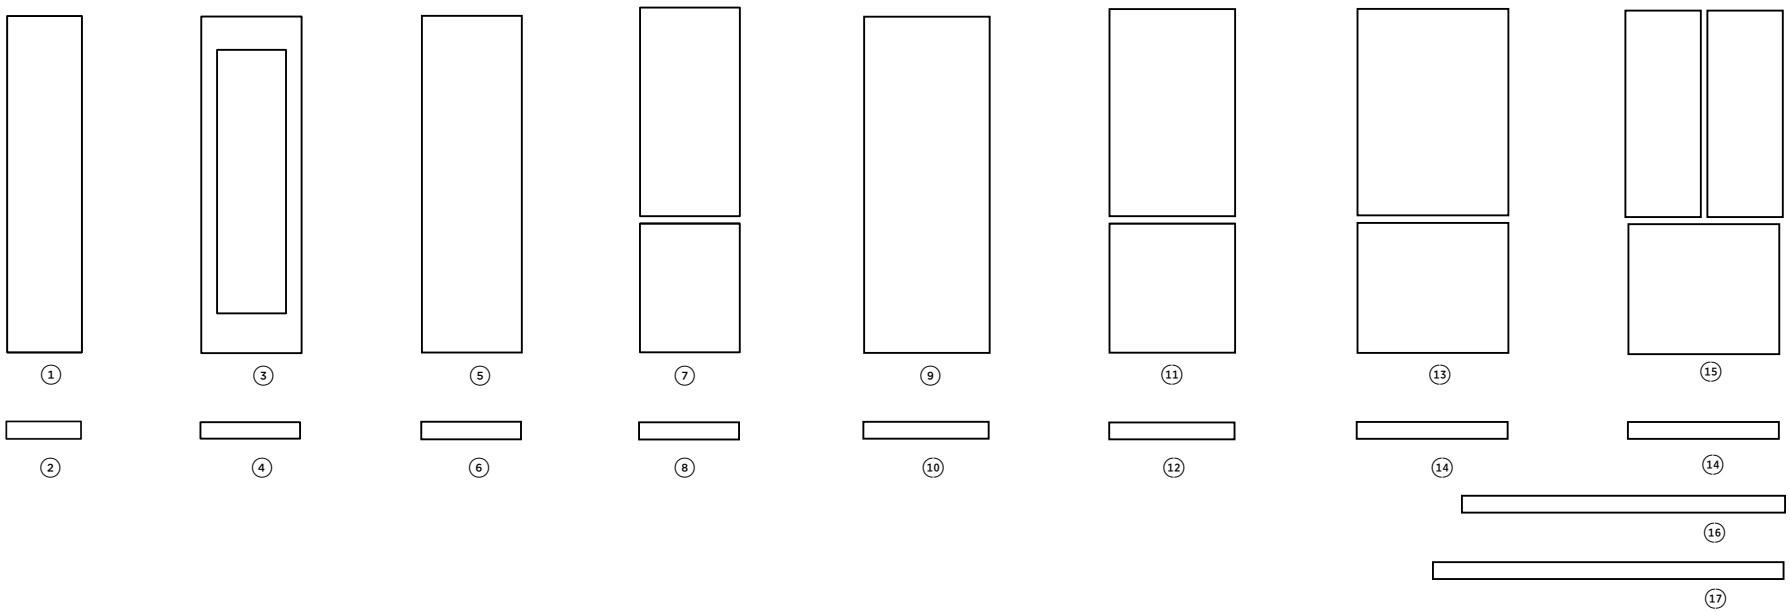

PRODUCT	PANEL MODELS	
	LEFT HINGE	RIGHT HINGE
① 18″ Freezer with Ice	RD1884L4D	RD1884R4D
③ 24″ Wine cabinet	RD2484VL4	RD2484VR4
⑤ 24″ Single door models	RD2484L4D	RD2484R4D
⑦ 24″ Refrigerator-Freezer	RD2484WLD	RD2484WRD
⑨ 30″ Single door models	RD3084L4D	RD3084R4D
⑪ 30″ Refrigerator-Freezer	RD3084WLD	RD3084WRD
⑬ 36″ Refrigerator-Freezer	RD3684WLD	RD3684WRD
⑮ 36″ Integrated french door Refrigerator-Freezer	RD3684AD	

TOE KICK PANEL		
SINGLE	DOUBLE	TRIPLE
② AKRS1804	N/A	N/A
④ AKRS2404	AKRS4804	AKRS7204
⑥ AKRS2404	AKRS4804	AKRS7204
⑧ AKRS2404	AKRS4804	AKRS7204
⑩ AKRS3004	AKRS6004	N/A
⑫ AKRS3004	AKRS6004	N/A
⑭ AKRS3604	AKRS7204	N/A


TOE KICK PANEL FOR MULTIPLE MODELS	
MODEL	CONFIGURATIONS
⑯ AKRS7804	24″ + 24″ + 30″ (77 15/16″) 18″ + 30″ + 30″ (77 15/16″)
⑰ AKRS8404	24″ + 30″ + 30″ (83 7/8″) 24″ + 24″ + 36″ (83 7/8″)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


© FISHER & PAYKEL APPLIANCES LIMITED 2026

DATA SHEETS

© FISHER & PAYKEL APPLIANCES LIMITED 2026

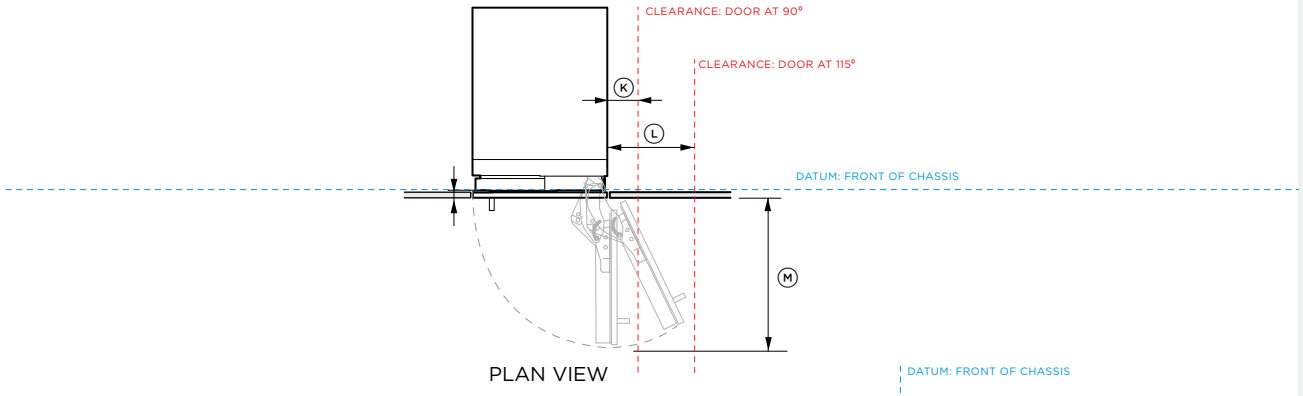

PLAN VIEW

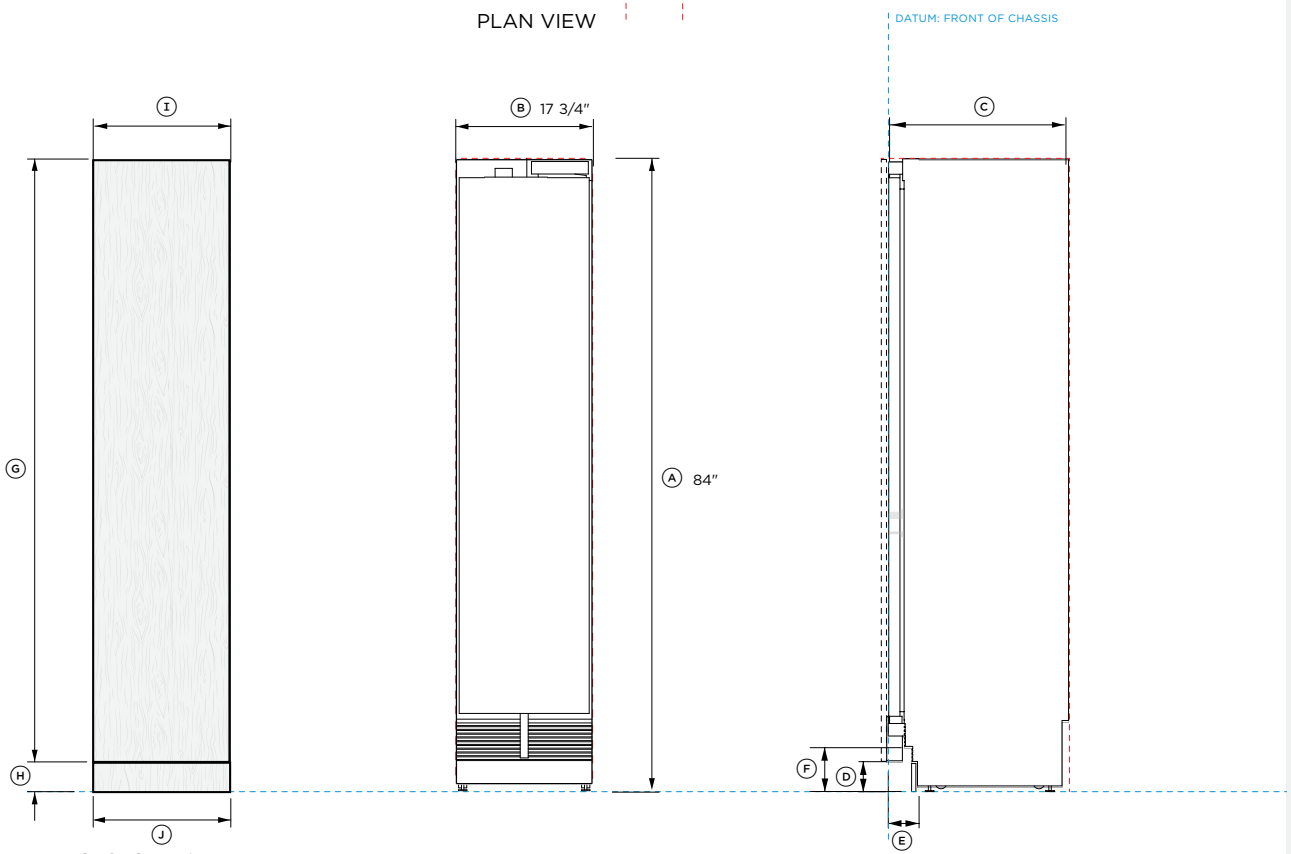

CUSTOM PANEL FRONT VIEW PROFILE VIEW

0 100 200 400
millimetres

Model no:

RS1884FRJE1, RS1884FLJE1, 18" Freezer
RS1884FLJK1
Shown with:
Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
Ⓐ Overall height of chassis	84	2134
Ⓑ Overall width of chassis	17 3/4	451
Ⓒ Overall depth of chassis (excluding door panel)	24	610
Ⓓ Floor to bottom of door	4	102
Ⓔ Depth of toe kick*	2 7/8 - 4	73 - 102
Ⓕ Height of toe kick - chassis	6	152
Ⓖ Minimum height of custom door panel	79 7/8	2029
Ⓗ Height of custom toe kick panel	2 - 6	51 - 152
Ⓘ Minimum width of custom door panel Single Dual/multiple panel	 17 3/4 17 27/32	 451 453
Ⓙ Minimum width of custom toe kick - Single	17 7/8	454
Door/Drawer Opening Dimensions	**in**	**mm**
Ⓚ Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
Ⓛ Minimum door clearance** to adjacent wall* (115° – full internal access)	11 1/2	292
Ⓜ Depth of door measured from front of door panel (90° open)	20	508


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	18	457
Overall width of cavity (dual)	36	915
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

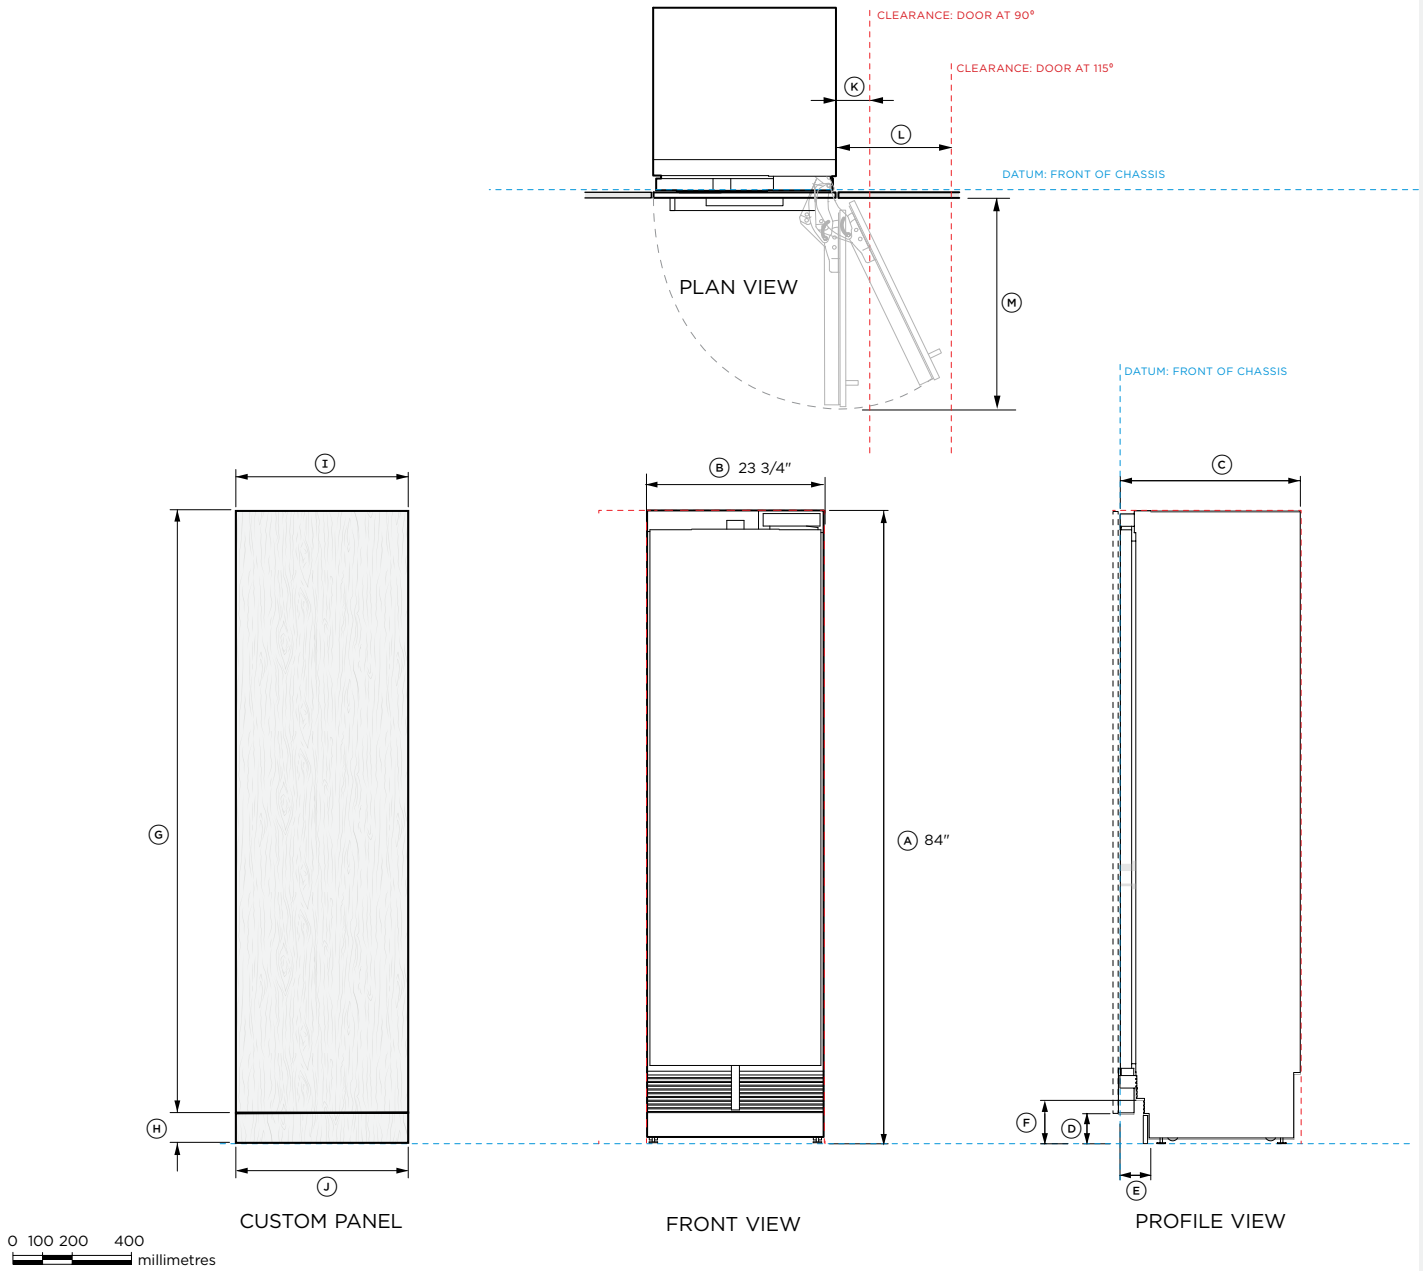

Model no:

RS2484SRHE1, RS2484SLHE1, RS2484FRJE1, RS2484FLJE1, RS2484SRHK1, RS2484SLHK1 , RS2484SRK1, RS2484SLK1, RS2484FLJK1

Shown with:

Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
(A) Overall height of chassis	84	2134
(B) Overall width of chassis	23 3/4	603
(C) Overall depth of chassis (excluding door panel)	24	610
(D) Floor to bottom of door	4	102
(E) Depth of toe kick*	2 7/8 - 4	73 - 102
(F) Height of toe kick - chassis	6	152
(G) Minimum height of custom door panel	79 7/8	2029
(H) Height of toe kick panel	2 - 6	51 - 152
(I) Minimum width of custom door and drawer panel Single Dual/multiple panel	 23 3/4 23 13/16	 603 605
(J) Minimum width of toe kick panel - single	23 13/16	606

Door/Drawer Opening Dimensions	**in**	**mm**
(K) Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
(L) Minimum door clearance** to adjacent wall* (115° – full internal access)	14	356
(M) Depth of door measured from front of door panel (90° open)	26	660


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	24	609
Overall width of cavity (dual)	48	1219
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

------ INDICATES CABINETRY / PRODUCT DATUM
------ INDICATES CABINETRY CLEARANCES
------ INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

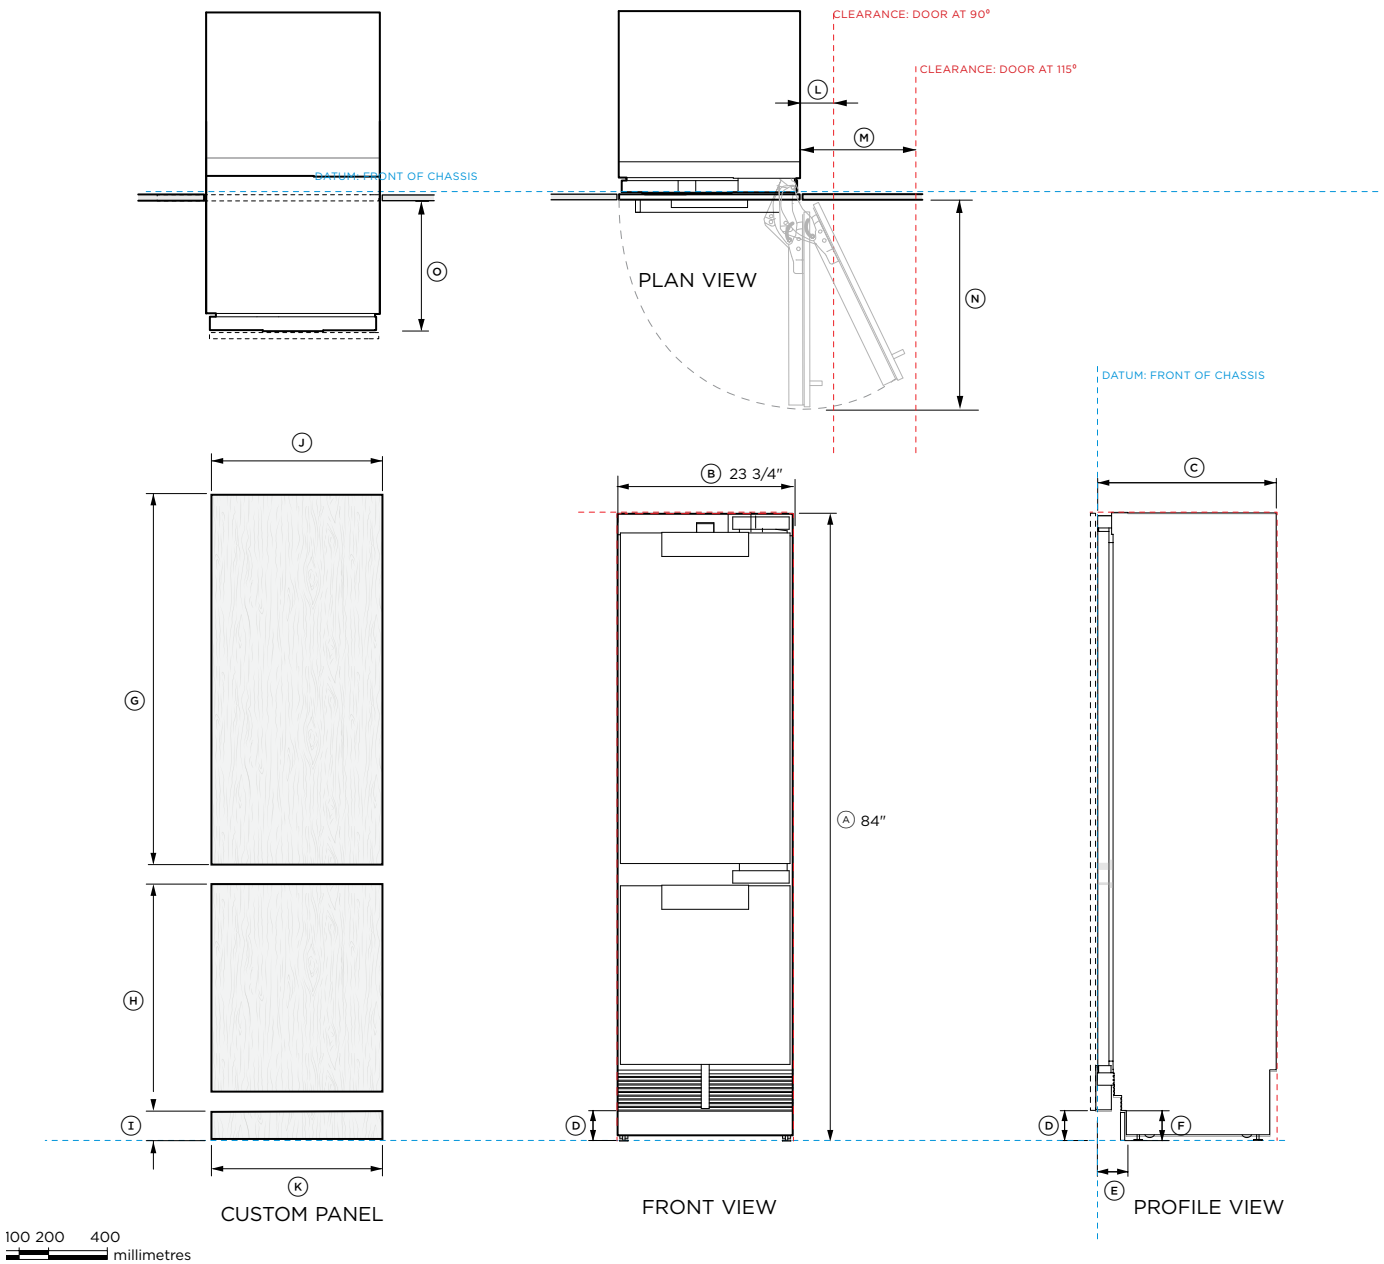

Model no:

RS2484WRUE1, RS2484WLUE1, RS2484WRUK1, RS2484WLUK1
Shown with:
Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
(A) Overall height of chassis	84	2134
(B) Overall width of chassis	23 3/4	603
(C) Overall depth of chassis (excluding door panel)	24	610
(D) Floor to bottom of door	4	102
(E) Depth of toe kick*	2 7/8 - 4	73 - 102
(F) Height of toe kick - chassis	6	152
(G) Minimum height of custom door panel	49 3/8	1254
(H) Minimum height of custom drawer panel	30 11/32	771
(I) Height of toe kick panel	2 - 6	51 - 152
(J) Minimum width of door/drawer panel Single Dual/multiple panel	 23 3/4 23 13/16	 603 605
(K) Minimum width of toe kick - Single	23 13/16	606
Door/Drawer Opening Dimensions	**in**	**mm**
(L) Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
(M) Minimum door clearance** to adjacent wall* (115° – full internal access)	14	356
(N) Depth of door measured from front of door panel (90° open)	26	660
(O) Depth of open drawer	15 3/4	400


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	24	609
Overall width of cavity (dual)	48	1219
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

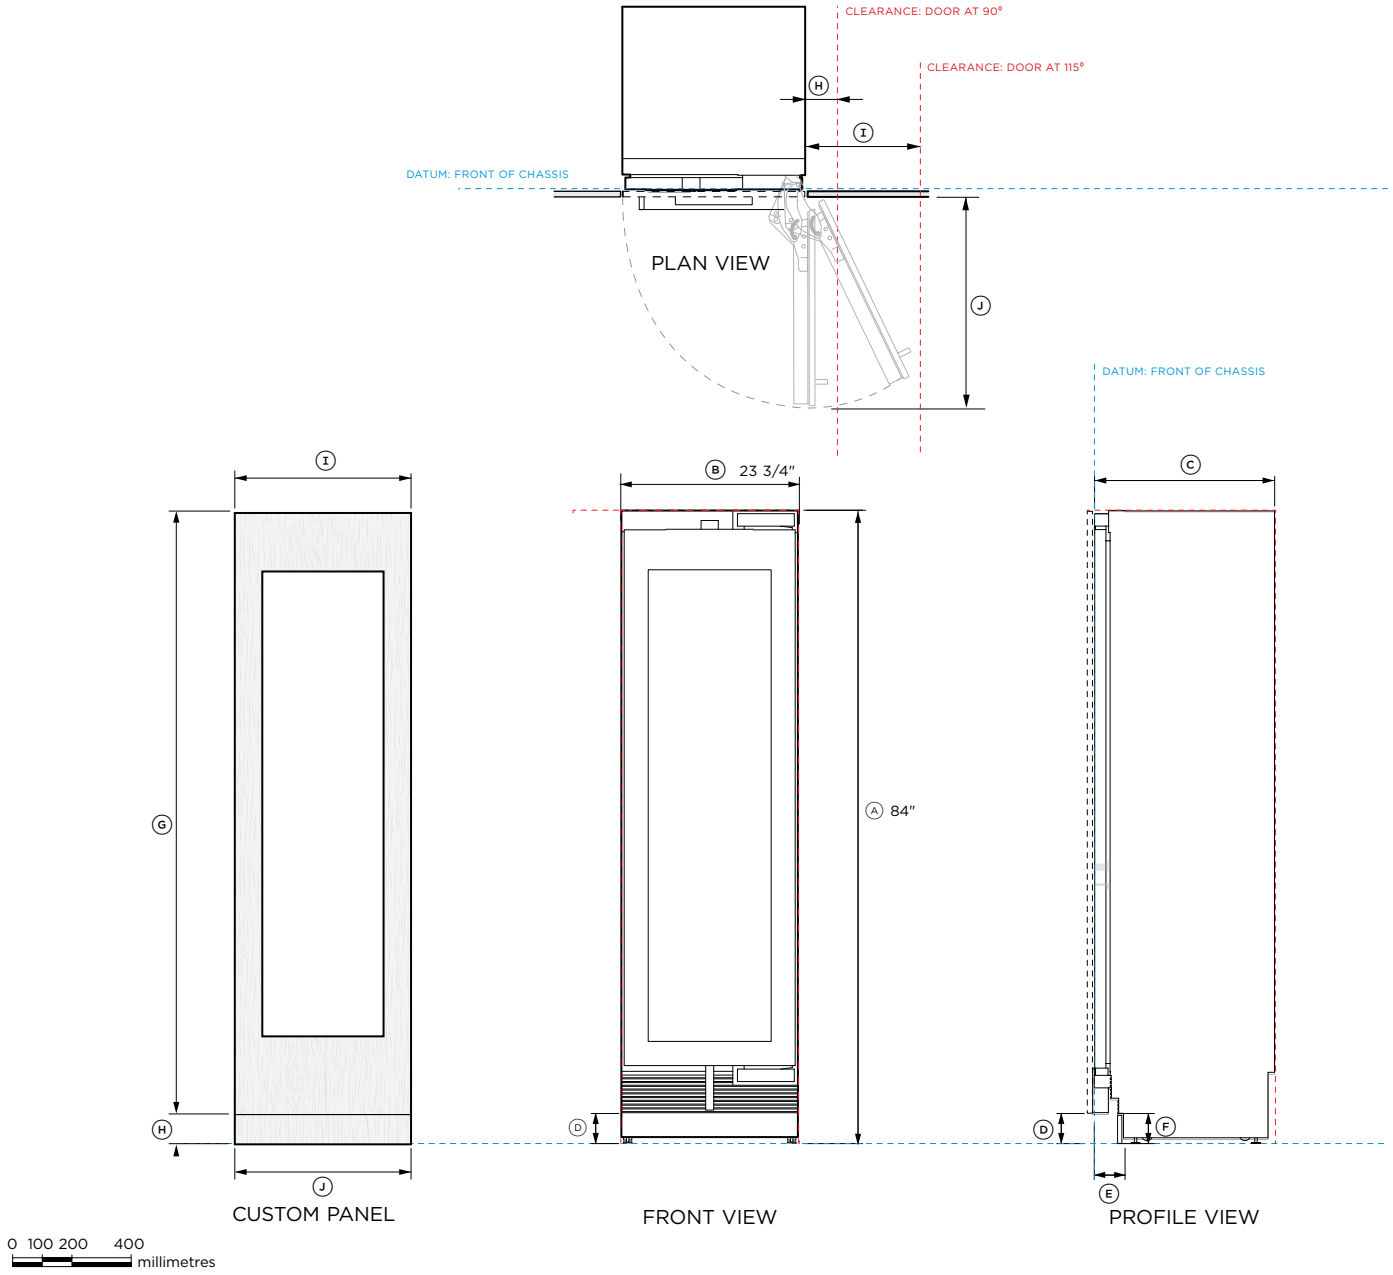

Model no:

RS2484VL2K, RS2484VR2K

Shown with:

Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
Ⓐ Overall height of chassis	84	2134
Ⓑ Overall width of chassis	23 3/4	603
Ⓒ Overall depth of chassis (excluding door panel)	24	610
Ⓓ Floor to bottom of door	4	102
Ⓔ Depth of toe kick*	2 7/8 - 4	73 - 102
Ⓕ Height of toe kick - chassis	6	152
Ⓖ Minimum height of custom door panel	79 7/8	2029
Ⓗ Height of custom toe kick panel	2 - 6	51 - 152
Ⓘ Minimum width of door panel Single Dual/multiple panel	 23 3/4 23 13/16	 603 605
Ⓙ Minimum width of toe kick - Single	23 13/16	606
Door/Drawer Opening Dimensions	**in**	**mm**
Ⓚ Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
Ⓛ Minimum door clearance** to adjacent wall* (115° – full internal access)	14	356
Ⓜ Depth of door measured from front of door panel (90° open)	26	660


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	24	609
Overall width of cavity (dual)	48	1219
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

------ INDICATES CABINETRY / PRODUCT DATUM
------ INDICATES CABINETRY CLEARANCES
------ INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

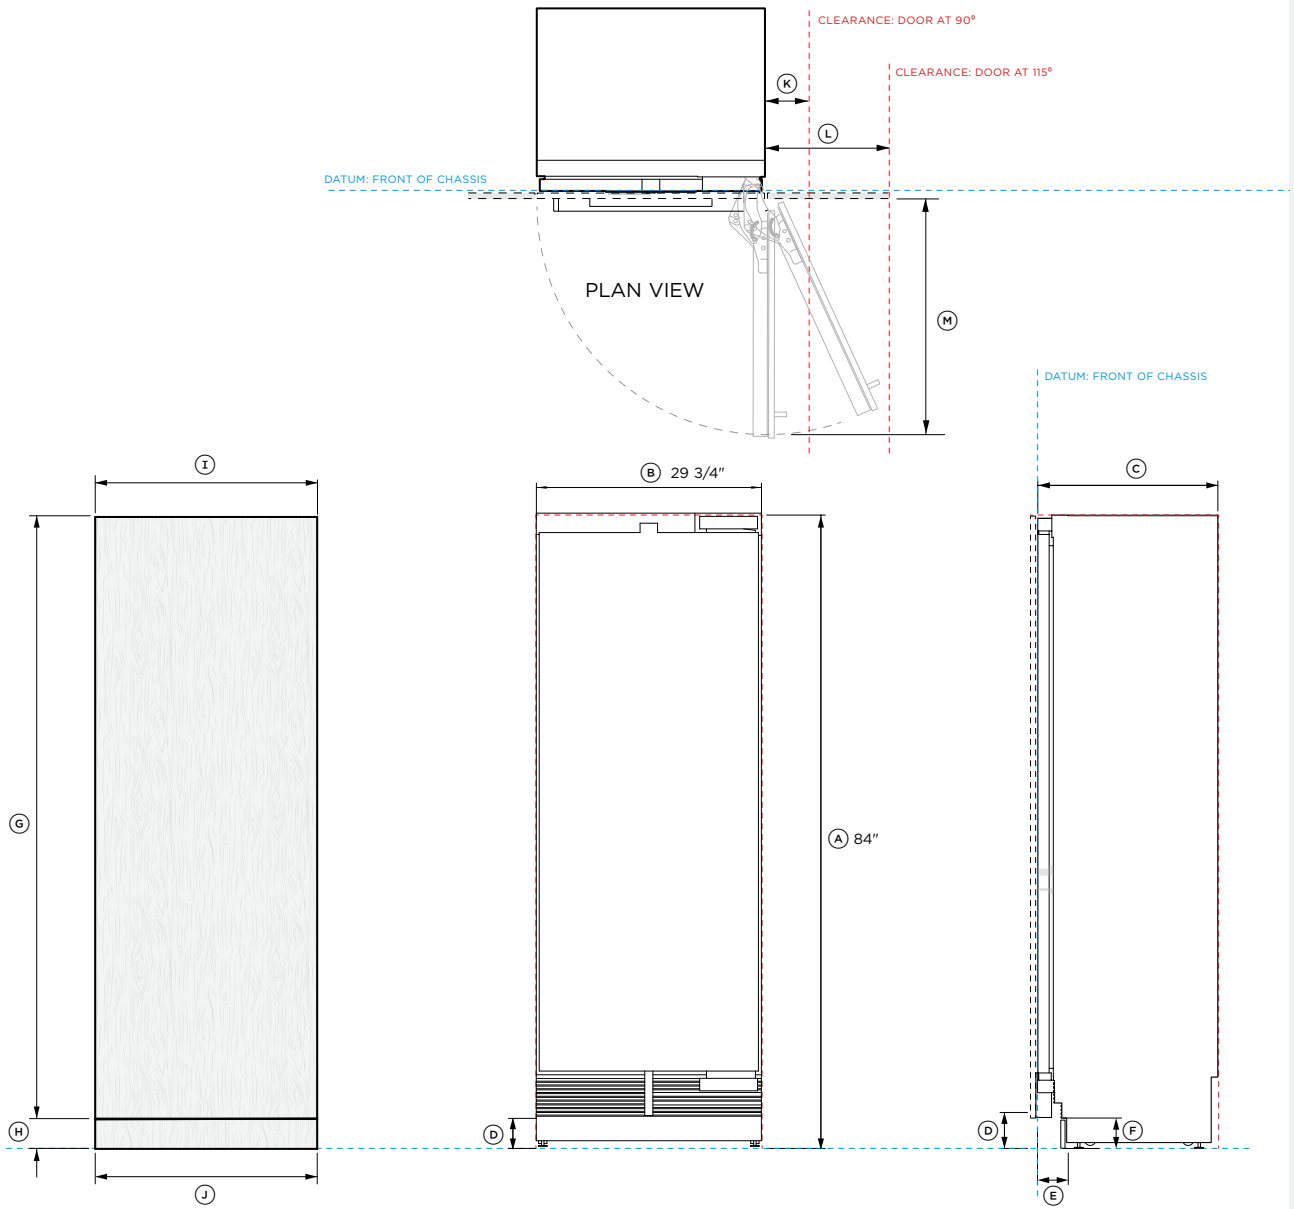

Model no:

RS3084SRHE1, RS3084SLHE1, RS3084FRJE1, RS3084FLJE1, RS3084SRHK1, RS3084SLHK1, RS3084SRK1, RS3084SLK1, RS3084FLJK1

Shown with:
Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
(A) Overall height of chassis	84	2134
(B) Overall width of chassis	29 3/4	756
(C) Overall depth of chassis (excluding door panel)	24	610
(D) Floor to bottom of door	4	102
(E) Depth of toe kick*	2 7/8 - 4	73 - 102
(F) Height of toe kick - chassis	6	152
(G) Minimum height of custom door panel	79 7/8	2029
(H) Height of custom toe kick panel	2 - 6	51 - 152
(I) Minimum width of door panel Single Dual/multiple panel	 29 3/4 29 27/32	 756 758
(J) Minimum width of toe kick - Single	29 27/32	759

Door/Drawer Opening Dimensions	**in**	**mm**
(K) Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
(L) Minimum door clearance** to adjacent wall* (115° – full internal access)	16 1/2	419
(M) Depth of door measured from front of door panel (90° open)	32	813


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	30	762
Overall width of cavity (dual)	60 1/32	1525
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

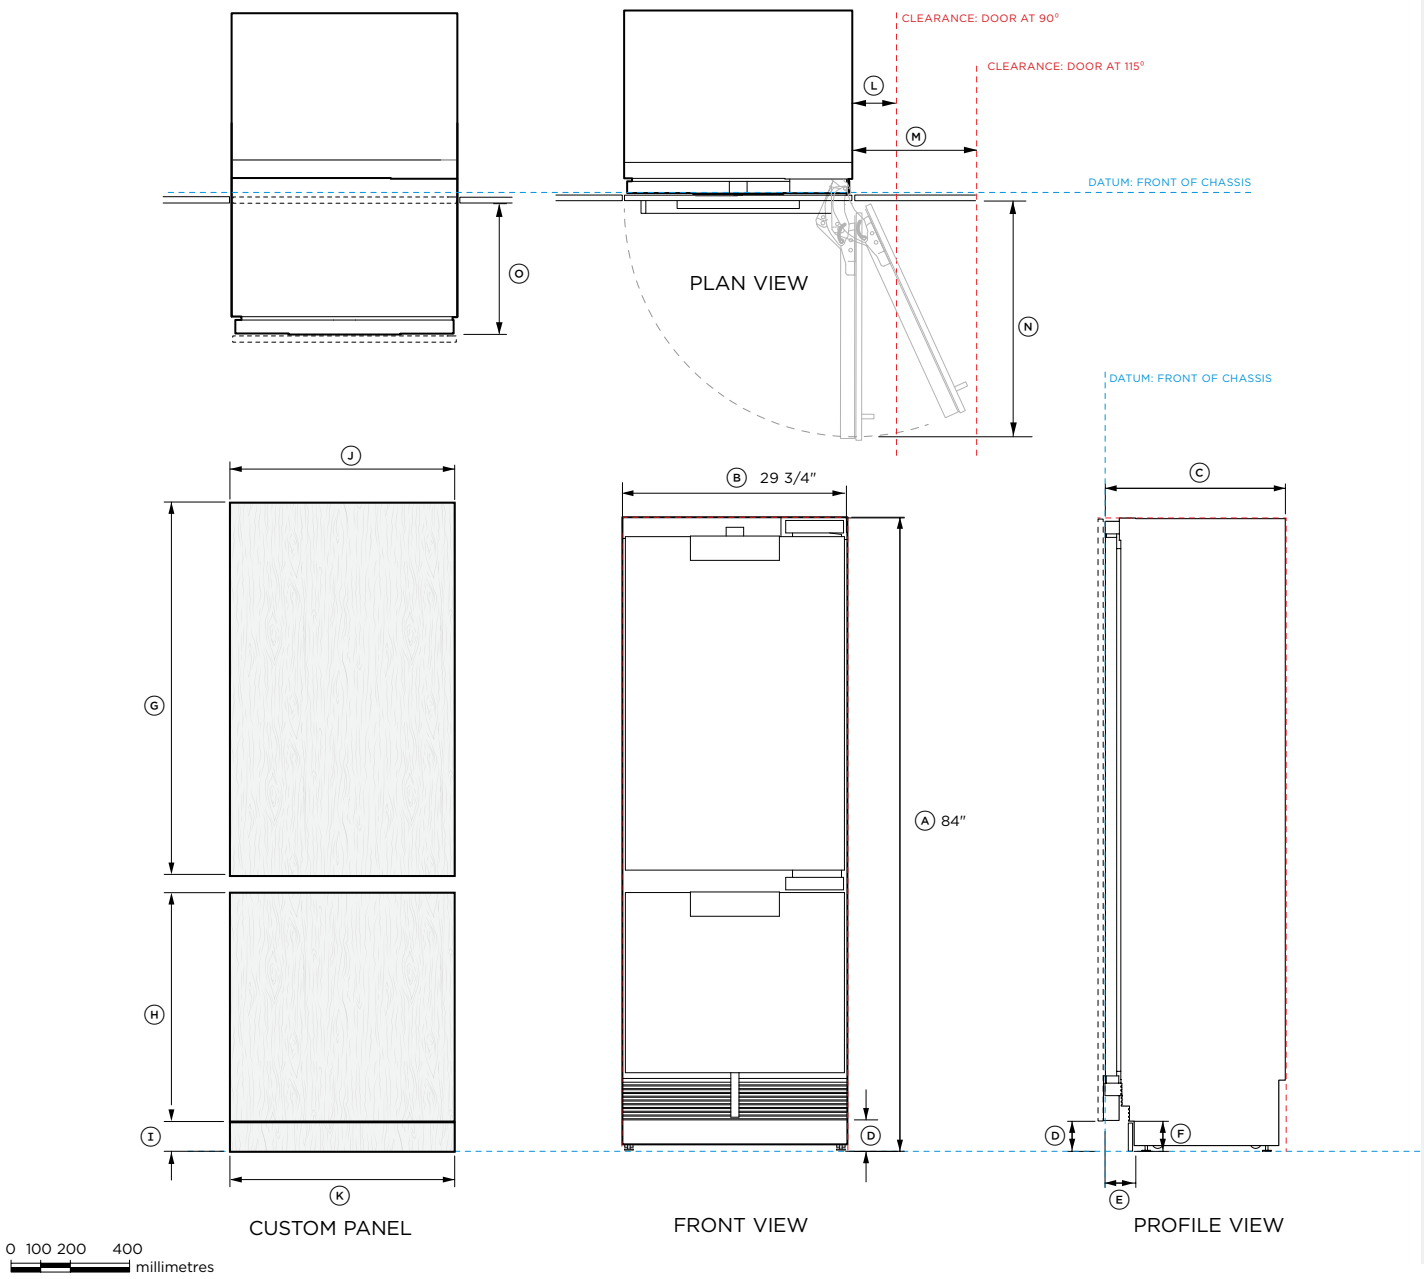

Model no:

RS3084WRUE1, RS3084WLUE1, RS3084WRUK1, RS3084WLUK1

Shown with:
Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
(A) Overall height of chassis	84	2134
(B) Overall width of chassis	29 3/4	756
(C) Overall depth of chassis (excluding door panel)	24	610
(D) Floor to bottom of door	4	102
(E) Depth of toe kick*	2 7/8 - 4	73 - 102
(F) Height of toe kick - chassis	6	152
(G) Minimum height of custom door panel	49 3/8"	1254
(H) Minimum height of custom drawer panel	30 11/32"	771
(I) Height of custom toe kick panel	2 - 6	51 - 152
(J) Minimum width of door/drawer panel Single Dual/multiple panel	 29 3/4 29 27/32	 756 758
(K) Minimum width of toe kick - Single	29 27/32	759
Door/Drawer Opening Dimensions	**in**	**mm**
(L) Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
(M) Minimum door clearance** to adjacent wall* (115° – full internal access)	16 1/2	419
(N) Depth of door measured from front of door panel (90° open)	32	813
(O) Depth of open drawer	15 3/4	400


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	30	762
Overall width of cavity (dual)	60 1/32	1525
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

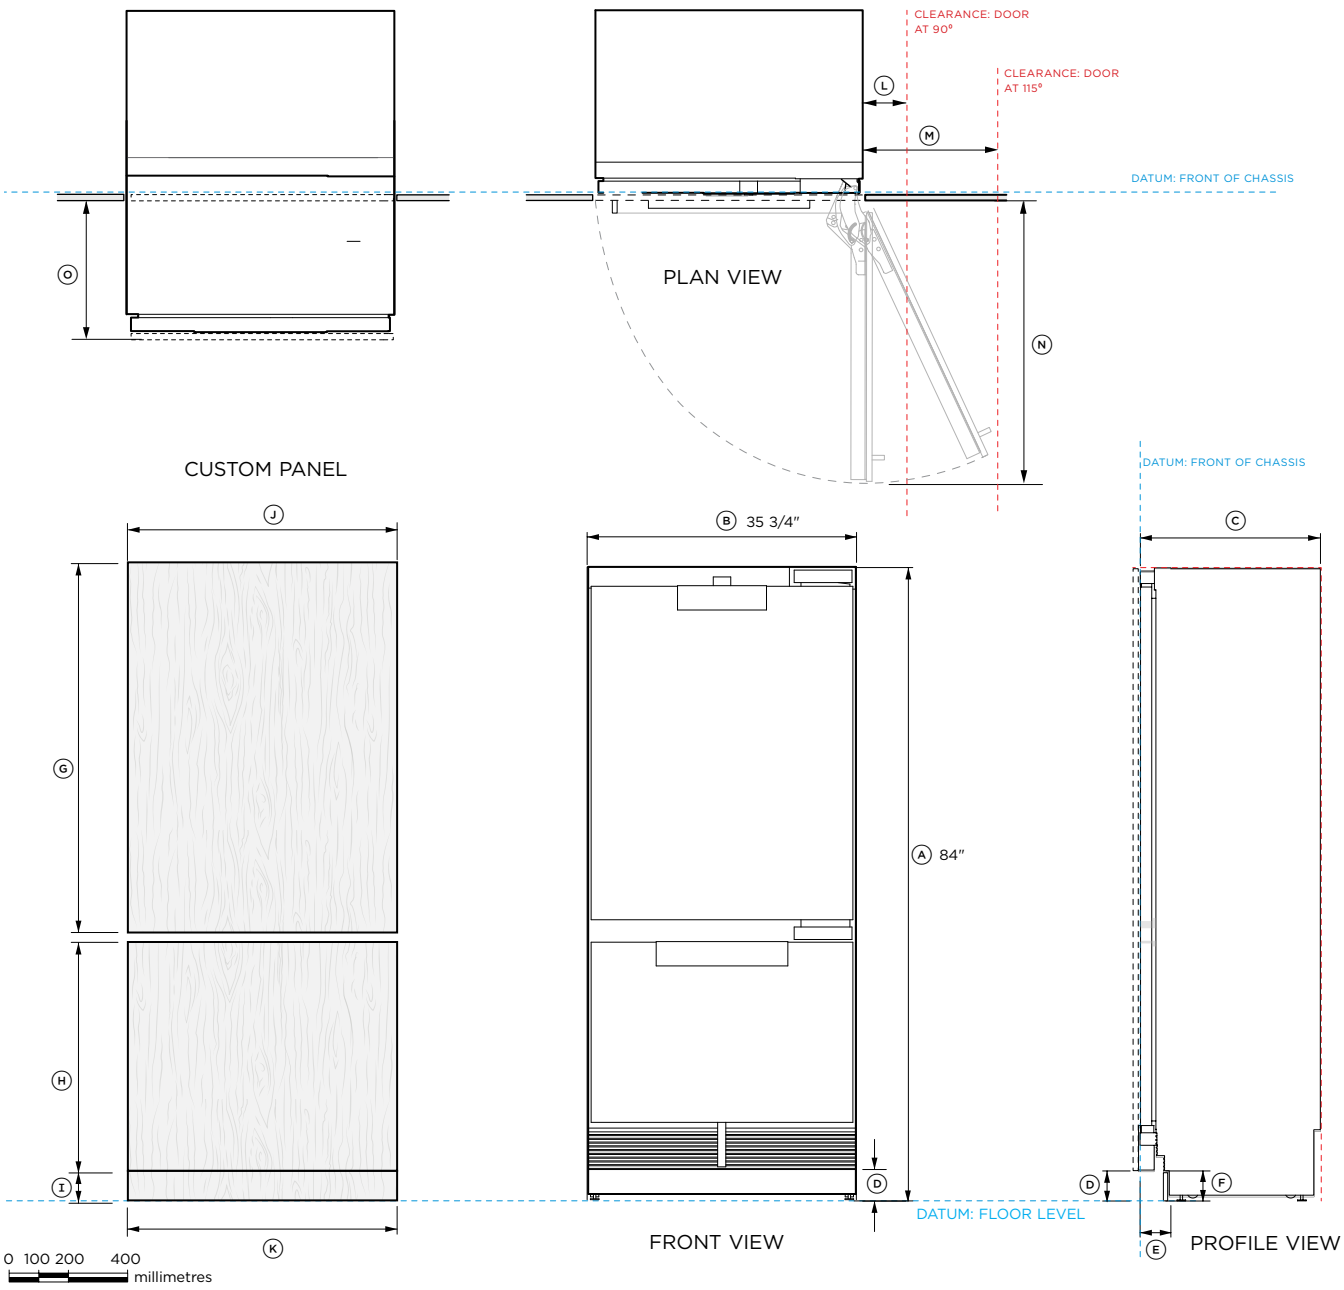

Model no:

RS3684WRUVE1, RS3684WLUVE1

Shown with:

Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
(A) Overall height of chassis	84	2134
(B) Overall width of chassis	35 3/4	908
(C) Overall depth of chassis (excluding door panel)	24	610
(D) Floor to bottom of door	4	102
(E) Depth of toe kick*	2 7/8 - 4	73 - 102
(F) Height of toe kick - chassis	6	152
(G) Minimum height of custom door panel	49 3/8"	1254
(H) Minimum height of custom drawer panel	30 11/32"	771
(I) Height of custom toe kick panel	2 - 6	51 - 152
(J) Minimum width of door/drawer panel Single Dual/multiple panel	 35 3/4 35 13/16	 908 910
(K) Minimum width of toe kick - Single	35 7/8	911
Door/Drawer Opening Dimensions	**in**	**mm**
(L) Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 11/16	119
(M) Minimum door clearance** to adjacent wall* (115° – full internal access)	20 3/4	527
(N) Depth of door measured from front of door panel (90° open)	38 1/16	967
(O) Depth of open drawer	15 3/4	400


Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	36	914
Overall width of cavity (dual)	72	1829
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness
** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

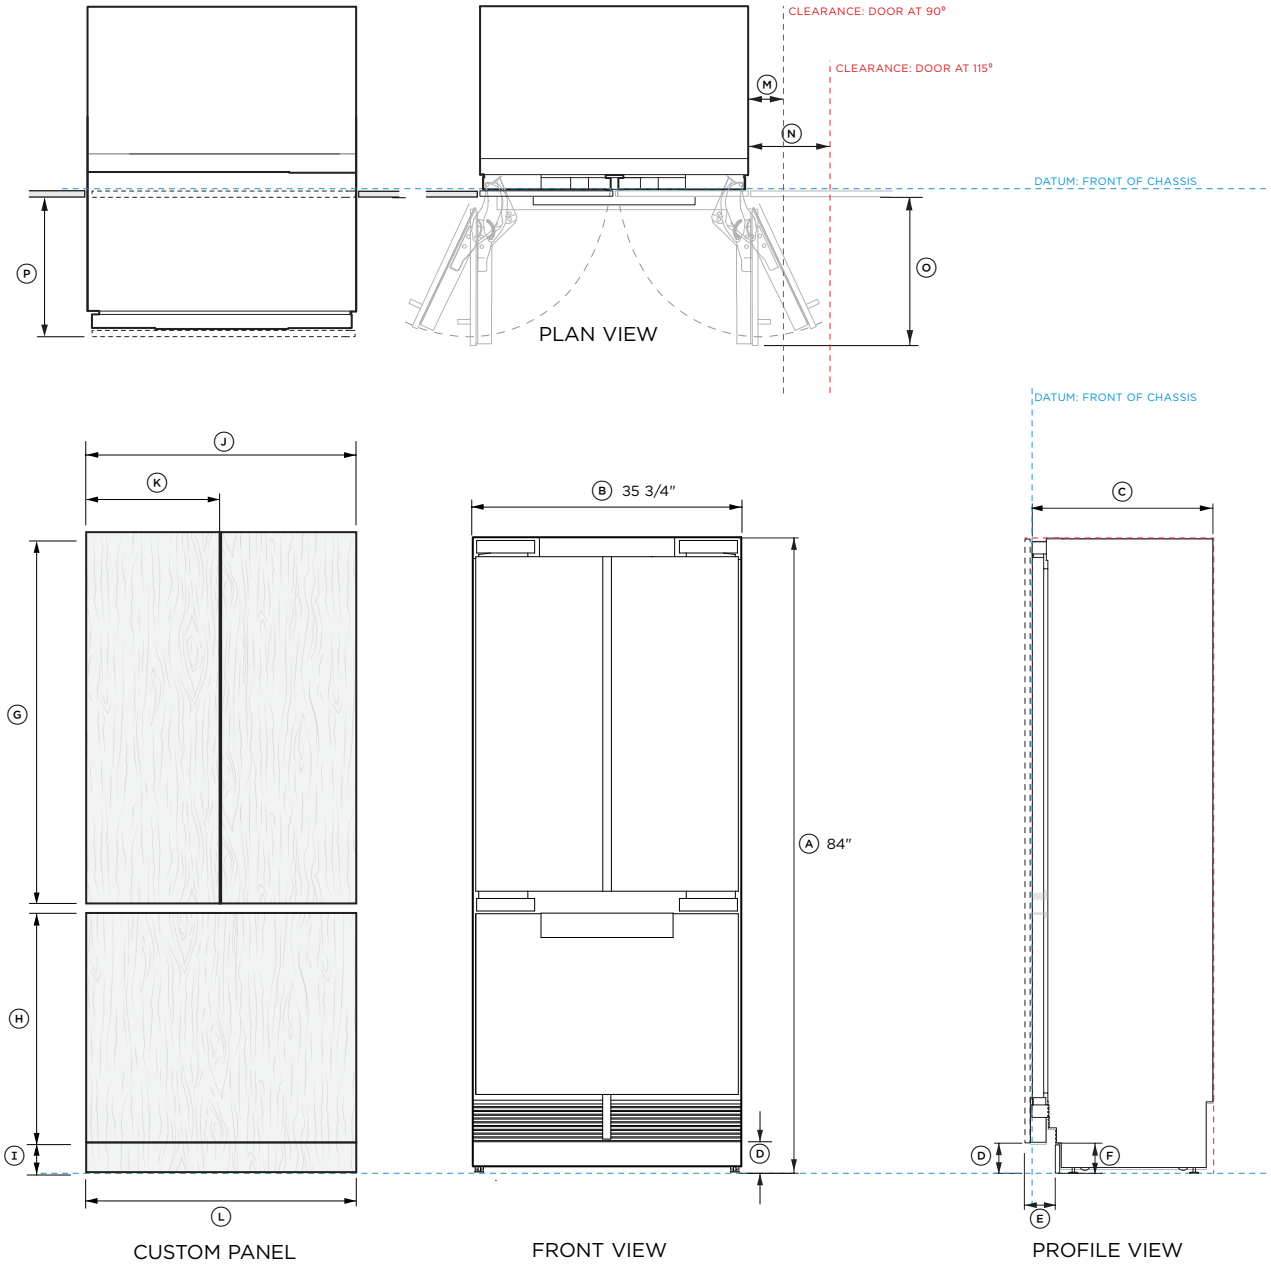

Model no: RS3684AUVE1

Shown with: Custom Door Panel (stainless steel panel optional)

Product Dimensions	**in**	**mm**
(A) Overall height of chassis	84	2134
(B) Overall width of chassis	35 3/4	908
(C) Overall depth of chassis (excluding door panel)	24	610
(D) Floor to bottom of door	4	102
(E) Depth of toe kick*	2 7/8 - 4	73 - 102
(F) Height of toe kick - chassis	6	152
(G) Minimum height of door panel	49 3/8"	1254
(H) Minimum height of drawer panel	30 11/32"	771
(I) Height of custom toe kick panel	2 - 6	51 - 152
(J) Minimum width of drawer panel Single Dual/multiple panel	 35 3/4 35 13/16	 908 910
(K) Minimum width of door panels Single Dual/multiple panel	 17 13/16 17 1/8	 452.5 453
(L) Minimum width of toe kick - Single	**35 7/8**	911

Door/Drawer Opening Dimensions	**in**	**mm**
(M) Minimum door clearance** to adjacent wall (90° – reduced internal access)	4 5/16	119
(N) Minimum door clearance** to adjacent wall* (115° – full internal access)	12 1/4	311
(O) Depth of door measured from front of door panel (90° open)	22 5/8	575
(P) Depth of open drawer	15 3/4	400

Minimum Clearances	**in**	**mm**
Minimum panel gap clearance	1/8	3
Overall height of cavity	84	2134
Overall width of cavity (single)	36	914
Overall width of cavity (dual)	72	1829
Minimum overall depth (shallow) of cavity when services are located outside of cavity***	25	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity***	25 19/32	650

* Assumes 3/4" panel thickness

** 3 15/16" tall stainless steel toe kick panel available. Adjust the height of the door panel accordingly.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM

- - - - - - INDICATES CABINETRY CLEARANCES

- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026


PLANNING CONSIDERATIONS

© FISHER & PAYKEL APPLIANCES LIMITED 2026


SINGLE INSTALLATION

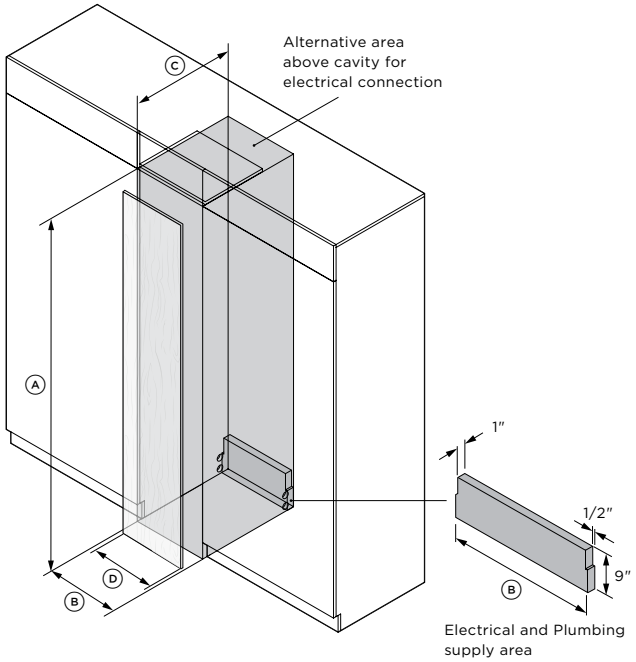

DUAL INSTALLATION

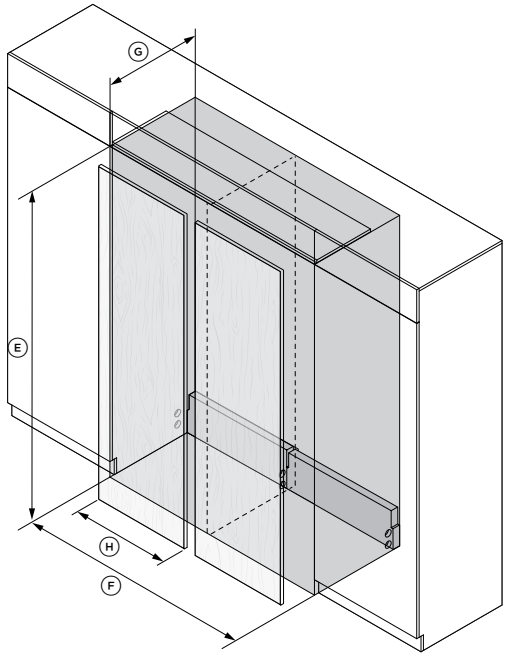

TRIPLE INSTALLATION

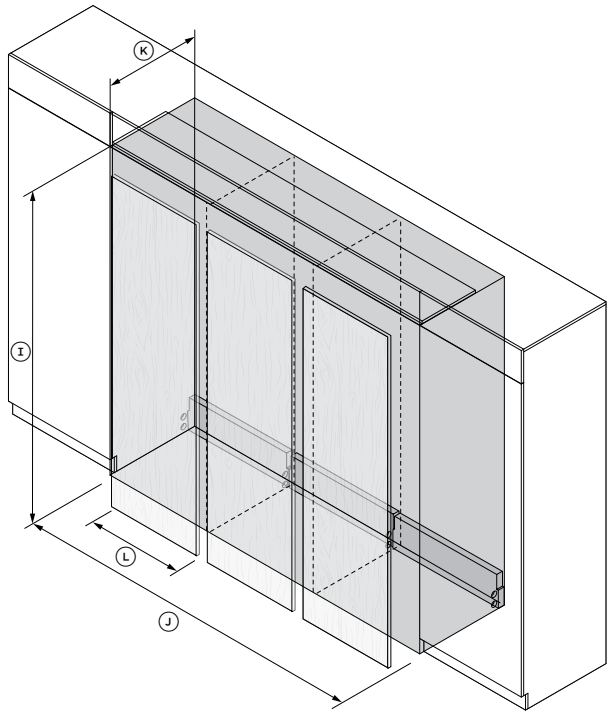

SINGLE CAVITY DIMENSIONS	18"		24"		30"		36"	
	in	mm	in	mm	in	mm	in	mm
Ⓐ Overall height of cavity	84	2134	84	2134	84	2134	84	2134
Ⓑ Overall width of cavity	18	457	24	609	30	762	36	914
Ⓒ Minimum overall depth of cavity* (services located at rear of cavity)	25 5/8	650	25 5/8	650	25 5/8	650	25 5/8	650
Minimum overall depth of cavity* (services located outside of cavity)	25	635	25	635	25	635	25	635
Ⓓ Custom door panel widths** 36" French door	17 3/4	451	23 3/4	603	29 3/4	756	35 3/4 17 13/16	908 452.5

DUAL CAVITY DIMENSIONS	18"		24"		30"		36"	
	in	mm	in	mm	in	mm	in	mm
Ⓔ Overall height of cavity	84	2134	84	2134	84	2134	84	2134
Ⓕ Overall width of cavity	36 1/32	915	48	1219	60 1/32	1525	36	1829
Ⓖ Minimum overall depth of cavity* (services located at rear of cavity)	25 5/8	650	25 5/8	650	25 5/8	650	25 5/8	650
Minimum overall depth of cavity* (services located outside of cavity)	25	635	25	635	25	635	25	635
Ⓗ Custom door panel widths**	17 27/32	453	23 13/16	605	29 27/32	758	35 13/16 17 27/32	910 453

TRIPLE CAVITY DIMENSIONS	18"		24"		30"	
	in	mm	in	mm	in	mm
Ⓘ Overall height of cavity	84	2134	84	2134	84	2134
Ⓙ Overall width of cavity	53 31/32	1371	72	1829	90	2286
Ⓚ Minimum overall depth of cavity* (services located at rear of cavity)	25 5/8	650	25 5/8	650	25 5/8	650
Minimum overall depth of cavity* (services located outside of cavity)	25	635	25	635	25	635
Ⓛ Custom door panel widths**	17 27/32	453	23 13/16	605	29 27/32	758

*A 3mm minimum gap is required between custom panels and adjacent cabinetry. If overlaying panels to hide the cavity spacer, allow for extra panel width.

** Cavity depth assumes 3/4" thick panels. If overlaying panels to hide the cavity spacer, add extra panel width.


NOTE: A finished return of 102mm is required for framed cabinetry in the cavity.
The maximum amount of appliances per cavity is three.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DOOR CLEARANCES


18" Model		
90° OPENING DOOR CLEARANCES	**in**	**mm**
Ⓐ Minimum door clearance to adjacent wall	4 11/16	119
Ⓑ Maximum door opening depth	20	508
115° OPENING DOOR CLEARANCES		
Ⓒ Minimum door clearance to adjacent wall	11 1/2	292
24" Models		
90° OPENING DOOR CLEARANCES	**in**	**mm**
Ⓐ Minimum door clearance to adjacent wall	4 11/16	119
Ⓑ Maximum door opening depth	26	660
115° OPENING DOOR CLEARANCES		
Ⓒ Minimum door clearance to adjacent wall	14	356
30" Models		
90° OPENING DOOR CLEARANCES	**in**	**mm**
Ⓐ Minimum door clearance to adjacent wall	4 11/16	119
Ⓑ Maximum door opening depth	32	813
115° OPENING DOOR CLEARANCES		
Ⓒ Minimum door clearance to adjacent wall	16 1/2	419
36" Refrigerator Freezer		
90° OPENING DOOR CLEARANCES	**in**	**mm**
Ⓐ Minimum door clearance to adjacent wall	4 11/16	119
Ⓑ Maximum door opening depth	38 1/16	967
115° OPENING DOOR CLEARANCES		
Ⓒ Minimum door clearance to adjacent wall	20 3/4	527
36" French Door Refrigerator Freezer		
90° OPENING DOOR CLEARANCES	**in**	**mm**
Ⓓ Minimum door clearance to adjacent wall	4 11/16	119
Ⓔ Maximum door opening depth	22 5/8	575
115° OPENING DOOR CLEARANCES		
Ⓕ Minimum door clearance to adjacent wall	12 1/4	311

90° INTERNAL ACCESS

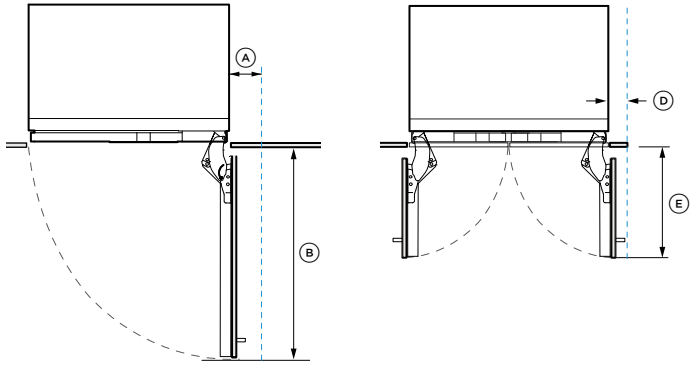

A hinge limiting pin can be installed to restrict door opening to 90° where necessary.
Minimum dimensions shown are for a 1 5/8" handle depth. Custom door panel and handle details need to be taken into account.


115° INTERNAL ACCESS

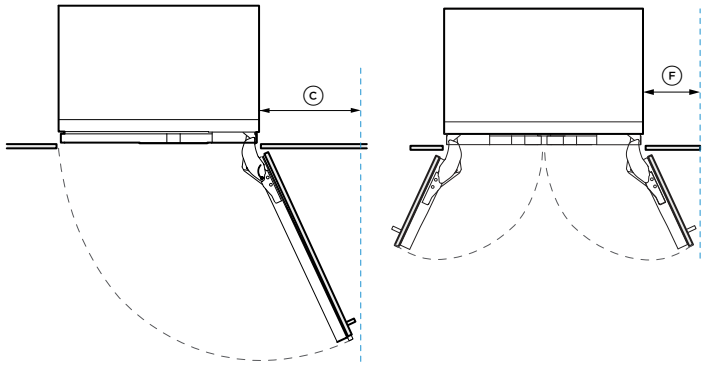

115° door opening - full internal access.

Minimum dimensions shown are for a 1 5/8" handle depth. Custom door panel and handle details need to be taken into account.

MULTIPLE INSTALLATION

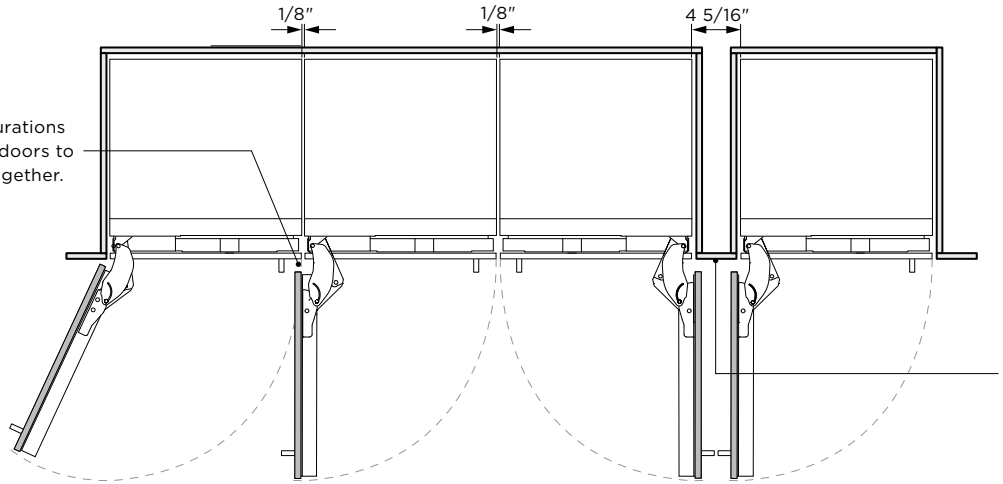


Some configurations do not allow doors to be opened together.


A gap is required if doors clash when opened.
If the gap is less than 4 5/16", only one door may be opened at a time depending on the handle style.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

LOW TOE KICK WITH EXTENDED PANEL

A 2" high toe kick can be achieved by installing a 81 7/8" panel with an extra grill installed.

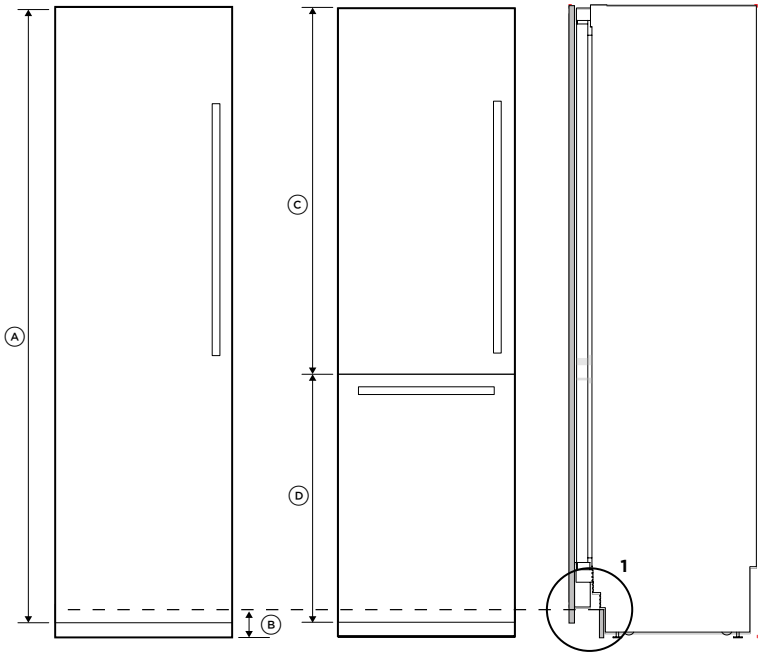





DETAIL VIEW 1
51MM HIGH TOE KICK WITH EXTRA GRILL

LOW TOE KICK PANEL DIMENSIONS	in	mm
Ⓐ Panel height - single door	81 7/8	2080
Ⓑ Toe kick height	2	51
Ⓒ Door panel height	49 3/8	1254
Ⓓ Drawer height	32 3/8	822

HIGH TOE KICK WITH REDUCED HEIGHT PANEL

A 6" toe kick with a 77 7/8" high panel can be achieved by removing the lower grill and the airflow divider.

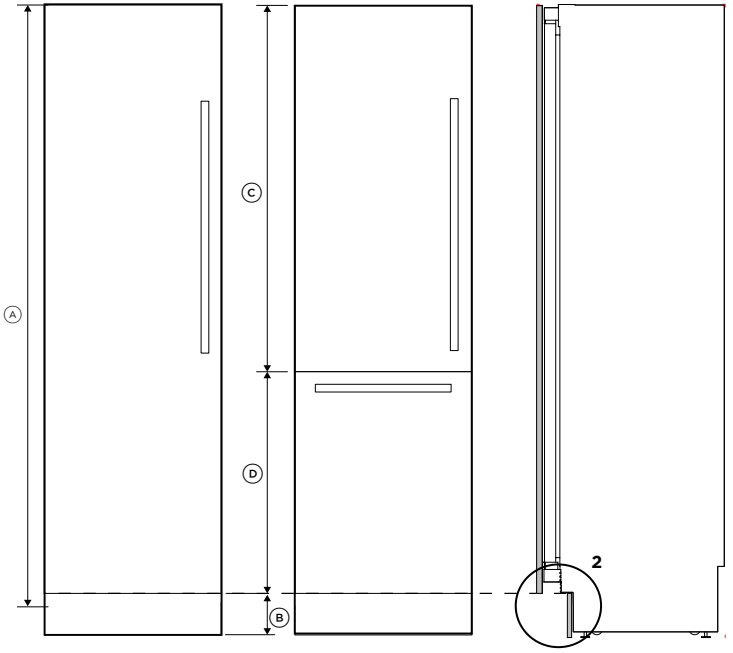




DETAIL VIEW 2
152MM TOE KICK - LOWER GRILL REMOVED

HIGH TOE KICK PANEL DIMENSIONS	in	mm
Ⓐ Panel height - single door	77 7/8	1978
Ⓑ Toe kick height	6	152
Ⓒ Door panel height	49 3/8	1254
Ⓓ Drawer height	28 3/8	721

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

HINGE ARTICULATION

© FISHER & PAYKEL APPLIANCES LIMITED 2026

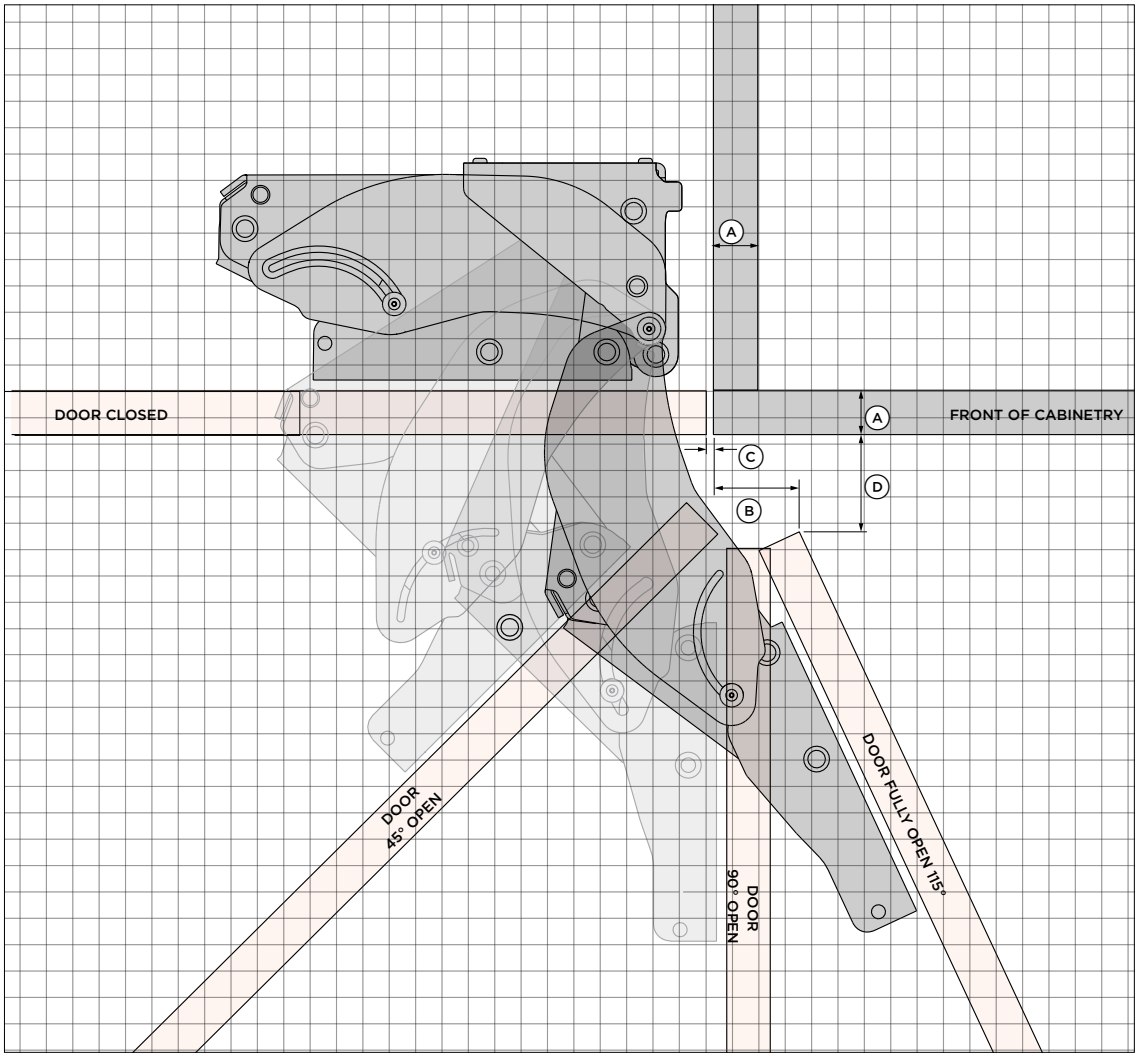

1 SQUARE = 1/2" (12.7mm)

TOP VIEW

DOOR HINGE - HETTICH K05

Left handed hinge models are a mirrored version of shown.

CUSTOM FRONT PANEL

- Ⓐ **Panel thickness:** 3/4"(19mm).
- Ⓑ **Gap between door and adjacent cabinetry:** Min 1/8"(3mm)
- Ⓒ **Gap between cabinet side and door at 115° open:** 1 13/32"(36mm)
- Ⓓ **Gap between adjacent cabinet and door at 115°:** 1 21/32"(42mm)

WEIGHT LIMITS

SINGLE PANEL MODELS	MAXIMUM WEIGHT
RS1884	Max 44lbs (20kg)
RS2484	Max 55lbs (25kg)
RS2484V Wine cabinet	Max 17.6lbs (8kg)
RS3084	Max 66lbs (30kg)

DOUBLE PANEL MODELS	MAXIMUM WEIGHT
RS2484W Top panel	Max 33lbs (15kg)
RS2484W Bottom panel	Max 20lbs (9kg)
RS3084W Top panel	Max 40lbs (18kg)
RS3084W Bottom panel	Max 24lbs (11kg)
RS3684W Top panel	Max 46lbs (21kg)
RS3684W Bottom panel	Max 30lbs (13.5kg)


FRENCH DOOR MODEL	
RS3684A Top panel left	Max 30lbs (13.5kg)
RS3684A Top panel right	Max 30lbs (13.5kg)

Note: Door weight includes weight of handle.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

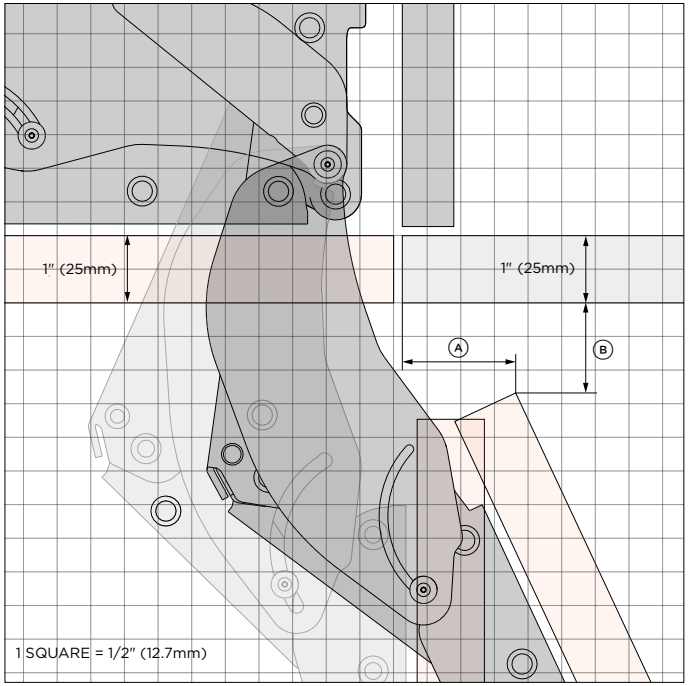


1" DOOR PANEL

- Ⓐ Door edge distance to cabinet side : 1 21/32"
- Ⓑ Gap between door corner and adjacent cabinetry: 1 11/32"

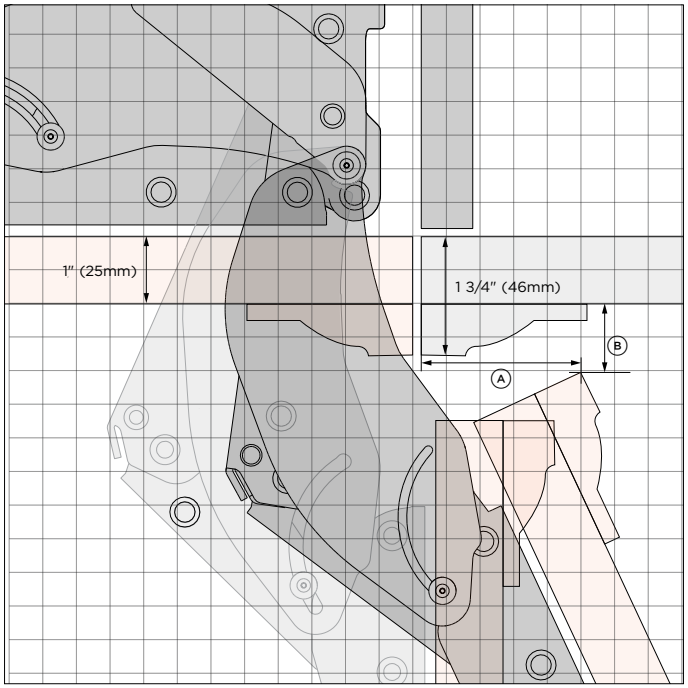

1" DOOR PANEL WITH 3/4" FRAMING

- Ⓐ Door edge distance to cabinet side : 2 3/8"
- Ⓑ Gap between door corner and adjacent cabinetry: 1 1/32"

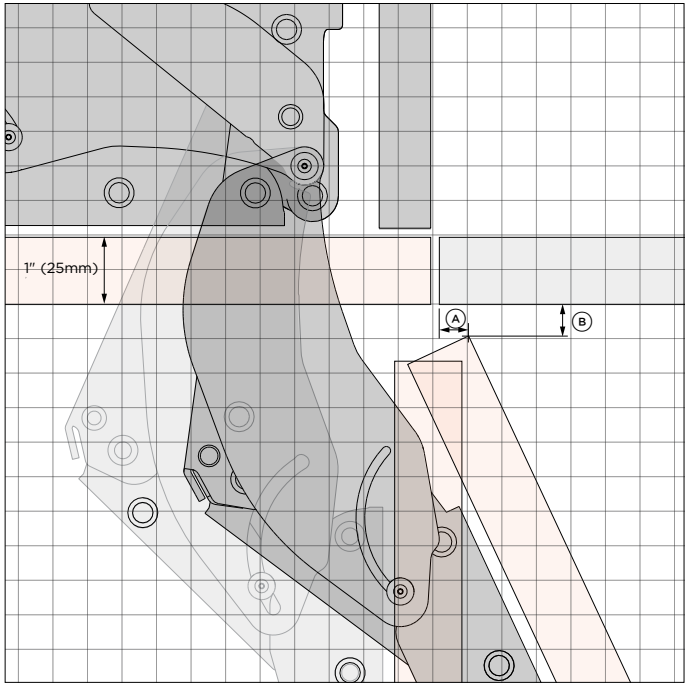

1" OVERLAY DOOR PANEL

- Ⓐ Door edge distance to cabinet side : 9/16"
- Ⓑ Gap between door corner and adjacent cabinetry: 15/32"


NOTE: Panel widths must be adjusted for overlay panels.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


CUSTOM PANEL PREPARATION

© FISHER & PAYKEL APPLIANCES LIMITED 2026

PANEL DIMENSIONS

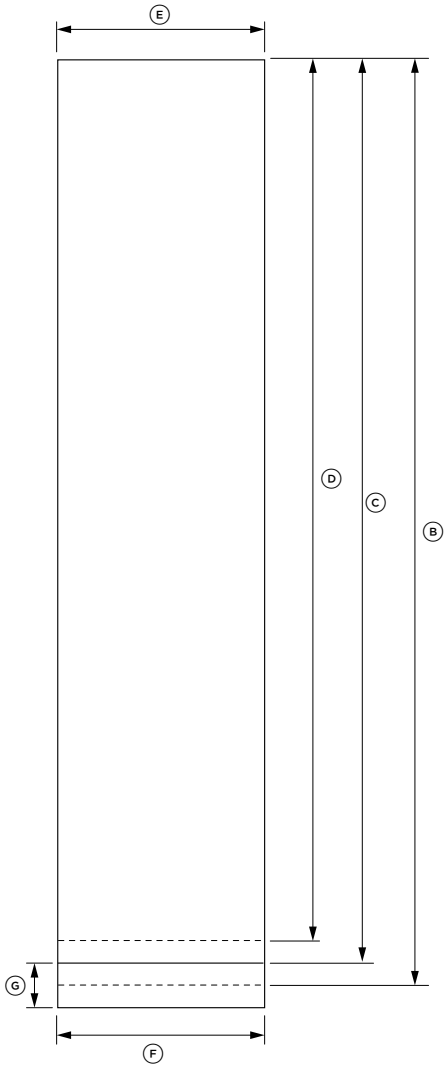

MOUNTING HOLES

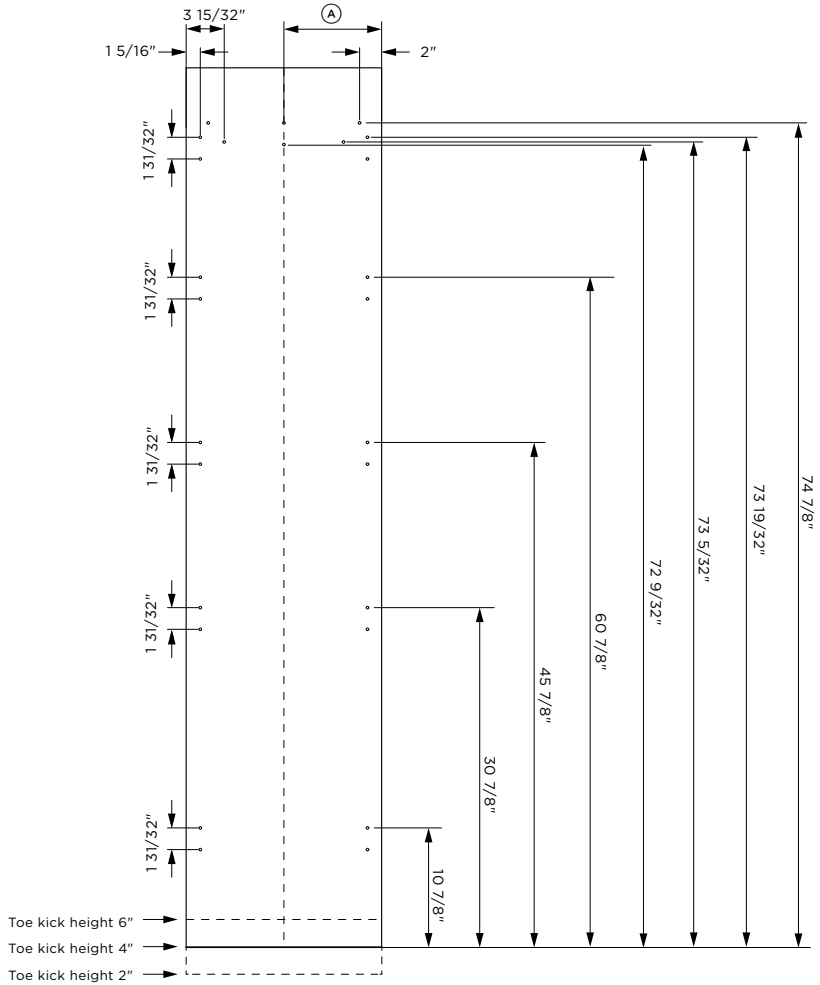

Model no:

Freezer	RS1884FRJE1, RS1884FLJE1, RS1884FLJK1

Custom Panel Dimensions	**in**	**mm**
Ⓐ Centerline of panel		
RS1884F Single cavity	8 7/8	225.5
RS1884F Dual/triple cavity	8 29/32	226.5
Ⓑ Height of door panel (standard 4" from floor)	79 7/8	2029
Ⓒ Height of door panel (2" from floor)*	81 7/8	2080
Ⓓ Height of door panel (6" from floor)*	77 7/8	1978
Ⓔ RS1884F Width of single panel	17 3/4	451
RS1884F Width of dual/multiple panels	17 27/32	453
Ⓕ RS1884 Width of toe kick	17 7/8	454
Ⓖ Toe kick height**	2 - 6	51-152
Panel thickness	min 3/4	min 19

Clearance Dimensions*	
Minimum cabinetry gap clearance from edge of door panel	1/8" or 3mm

*Take into account non-standard panel heights when drilling mounting holes.
**Toe kick can height can vary depending on panel height and ventillation.


Custom door panels, toe kick and handles to be manufactured / fitted by a cabinet maker.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

PANEL DIMENSIONS

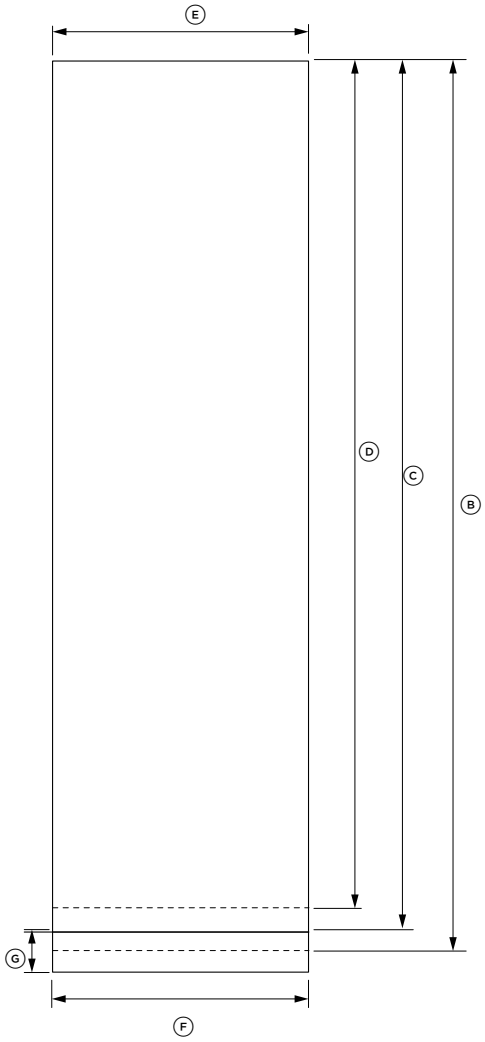

MOUNTING HOLES

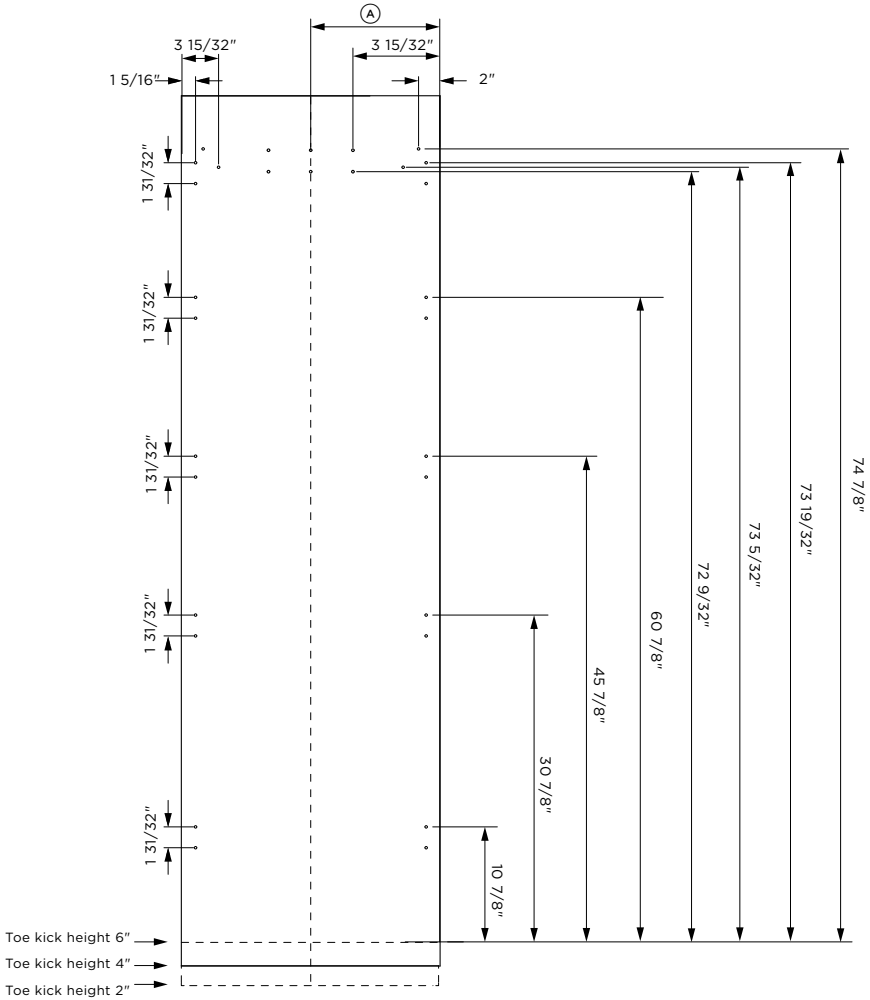

Model no:

Single Door Models
Freezers
RS2484FRJE1, RS2484FLJE1, RS2484FLJK1, RS3084FRJE1, RS3084FLJE1, RS3084FRJE1
Refrigerators
RS2484SRHE1, RS2484SLHE1, RS3084SRHE1, RS3084SLHE1, RS2484SRHK1, RS2484SLHK1, RS2484SRK1, RS2484SLK1 RS3084SRHK1, RS3084SLHK1, RS3084SRK, RS3084SLK1

Custom Panel Dimensions	**in**	**mm**
Ⓐ Centerline of panel		
RS2484 Single cavity	11 7/8	301.5
RS2484 Dual/triple cavity	11 29/32	302.5
RS3084 Single cavity	14 7/8	378
RS3084 Dual/triple cavity	14 15/16	379
Ⓑ Height of door panel (standard 4" from floor)	79 7/8	2029
Ⓒ Height of door panel (2" from floor)*	81 7/8	2080
Ⓓ Height of door panel (6" from floor)*	77 7/8	1978
Ⓔ RS2484 Width of single panel	23 3/4	603
RS2484 Width of dual/multiple panels	23 13/16	605
RS3084 Width of single panel	29 3/4	756
RS3084 Width of dual/multiple panels	29 27/32	758
Ⓕ RS2484 Width of toe kick	23 7/8	606
RS3084 Width of toe kick	29 7/8	759
Ⓖ Toe kick height**	2 - 6	51-152
Panel thickness	min 3/4	min 19

Clearance Dimensions*	**mm**
Minimum cabinetry gap clearance from edge of door panel	1/8" or 3mm

*Take into account non-standard panel heights when drilling mounting holes.
**Toe kick can height can vary depending on panel height and ventilation.


Custom door panels, toe kick and handles to be manufactured / fitted by a cabinet maker.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

PANEL DIMENSIONS

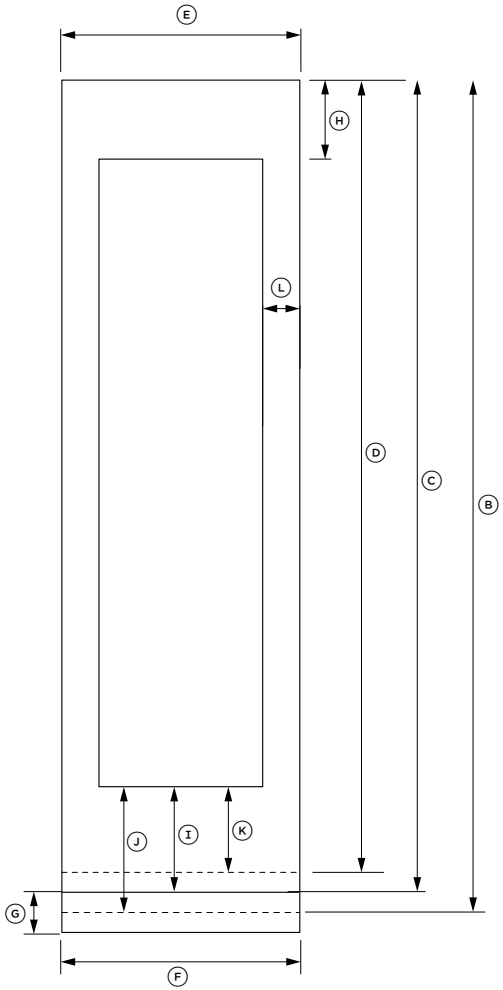

MOUNTING HOLES

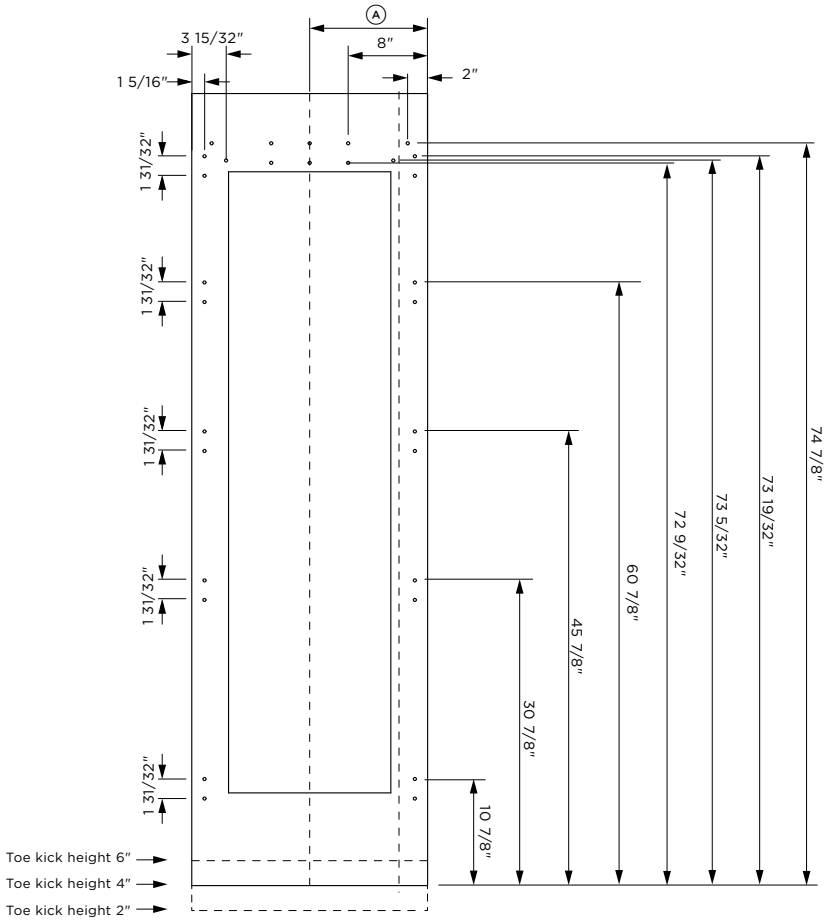

Model no:

RS2484VL2K,
RS2484VR2K

Custom Panel Dimensions	**in**	**mm**
Ⓐ Centerline of panel - single cavity Dual/triple cavity	11 7/8 11 29/32	301.5 302.5
Ⓑ Height of door panel (standard 4" from floor)	79 7/8	2029
Ⓒ Height of door panel (2" from floor)*	81 7/8	2080
Ⓓ Height of door panel (6" from floor)*	77 7/8	1978
Ⓔ Width of single panel Width of dual/multiple panels	23 3/4 23 13/16	603 605
Ⓕ Width of toe kick	23 7/8	606
Ⓖ Toe kick height**	2 - 6	50-152
Ⓗ Height of top frame	7 7/8 - 11 7/8	200 - 302
Ⓘ Height of lower frame (standard 4" from floor)	9 7/16	240
Ⓙ Height of lower frame (2" from floor)	11 7/16	291
Ⓚ Height of lower frame (6" from floor)	7 7/16	189
Ⓛ Width of side frames single install Width of side frames dual/triple install install	3 11/16 3 3/4	94 95
Panel thickness	min 3/4	min 19

Clearance Dimensions*	**mm**
Minimum cabinetry gap clearance from edge of door panel	1/8" or 3mm

*Take into account non-standard panel heights when drilling mounting holes.
**Toe kick can height can vary depending on panel height and ventillation.


Custom door panels, toe kick and handles to be manufactured / fitted by a cabinet maker.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

PANEL DIMENSIONS

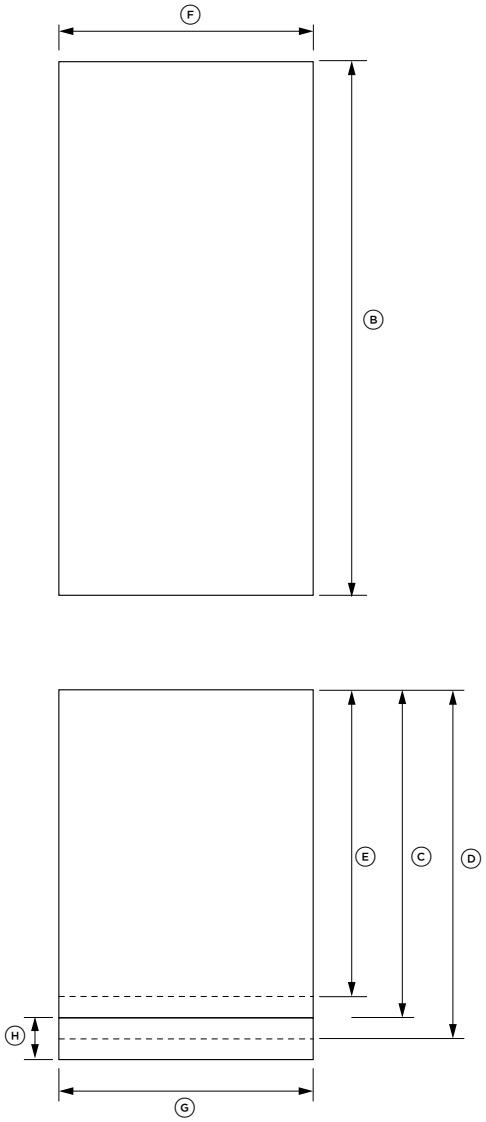

MOUNTING HOLES

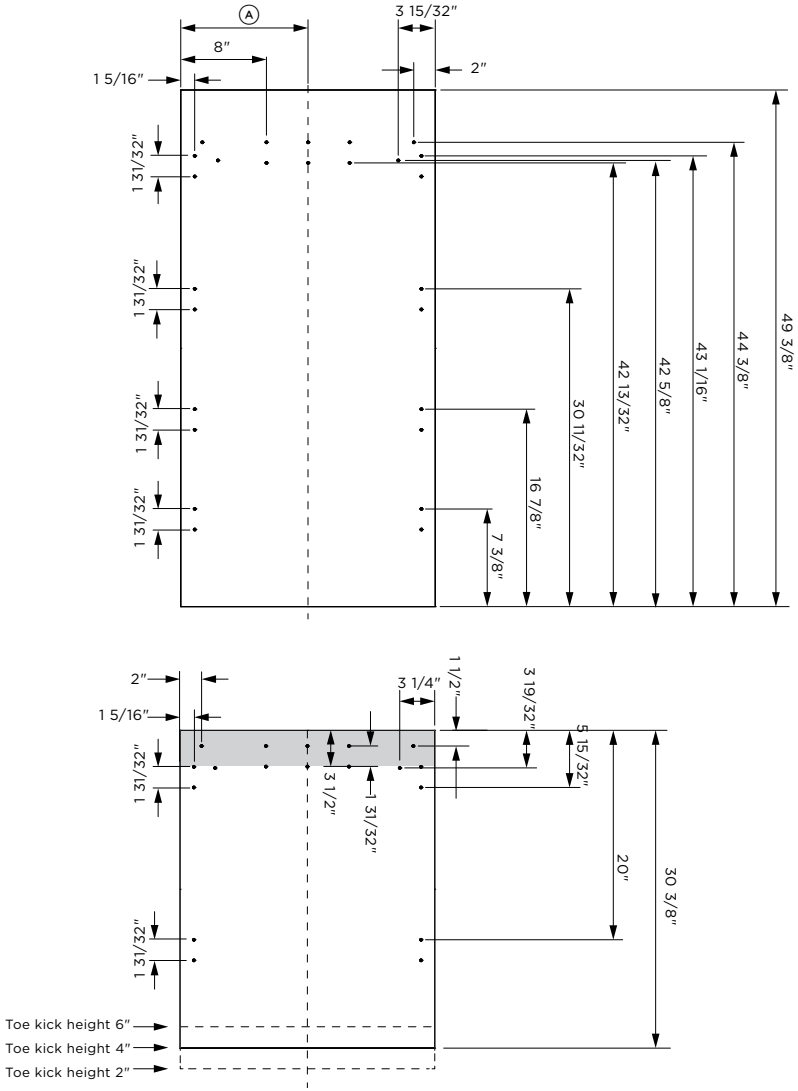

Model no:

RS2484WRUE, RS2484WLUE, RS3084WRUE1, RS3084WLUE1, RS3684WRUVE, RS3684WLUVE1
RS2484WRUK1, RS2484WLUK1, RS3084WRUK1, RS3084WLUK1

Custom Panel Dimensions	**in**	**mm**
Ⓐ Centerline of panel		
RS2484W Single cavity	11 7/8	301.5
RS2484W Dual/triple cavity	11 29/32	302.5
RS3084W Single cavity	14 7/8	378
RS3084W Dual/triple cavity	14 15/16	379
RS3684W Single cavity	17 7/8	454
RS3684W Dual/triple cavity	17 29/32	455
Ⓑ Height of door panel	49 3/8	1254
Ⓒ Height of drawer panel (standard 4" from floor)	30 3/8	772
Ⓓ Height of drawer panel (2" from floor)*	32 3/8	822
Ⓔ Height of drawer panel (6" from floor)*	28 3/8	721
Ⓕ RS2484 Width of single panel	23 3/4	603
RS2484 Width of dual/multiple panels	23 11/16	605
RS3084 Width of single panel	29 3/4	756
RS3084 Width of dual/multiple panels	29 27/32	758
RS3684W Width of single panel	35 3/4	908
RS3684W Width of dual/multiple panels	35 13/16	910
Ⓖ RS2484 Width of toe kick	23 7/8	606
RS3084 Width of toe kick	29 7/8	759
RS3684 Width of toe kick	35 7/8	911
Ⓗ Toe kick height**	2 - 6	51-152
Panel thickness	min 3/4	min 19

Clearance Dimensions*	**mm**
Minimum cabinetry gap clearance from edge of door panel	1/8" or 3mm

*Take into account non-standard panel heights when drilling mounting holes.
**Toe kick can height can vary depending on panel height and ventillation.


Custom door panels, toe kick and handles to be manufactured / fitted by a cabinet maker.


------ INDICATES CABINETRY / PRODUCT DATUM
------ INDICATES CABINETRY CLEARANCES
------ INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


© FISHER & PAYKEL APPLIANCES LIMITED 2026


PANEL DIMENSIONS

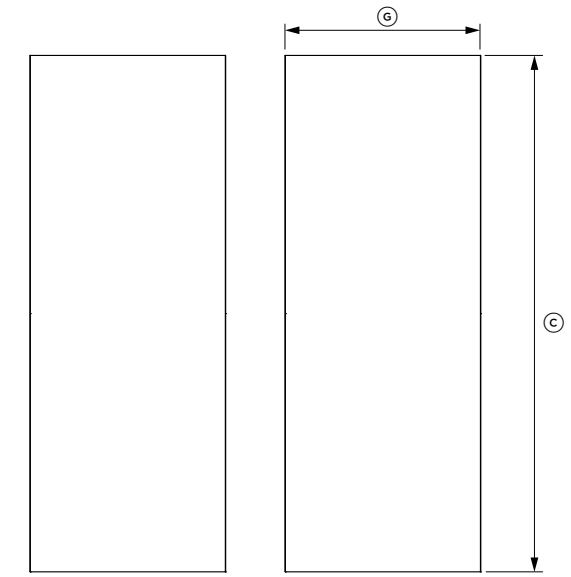

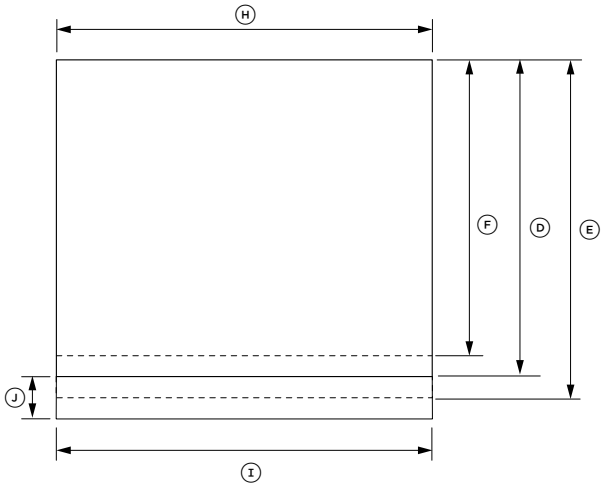

MOUNTING HOLES

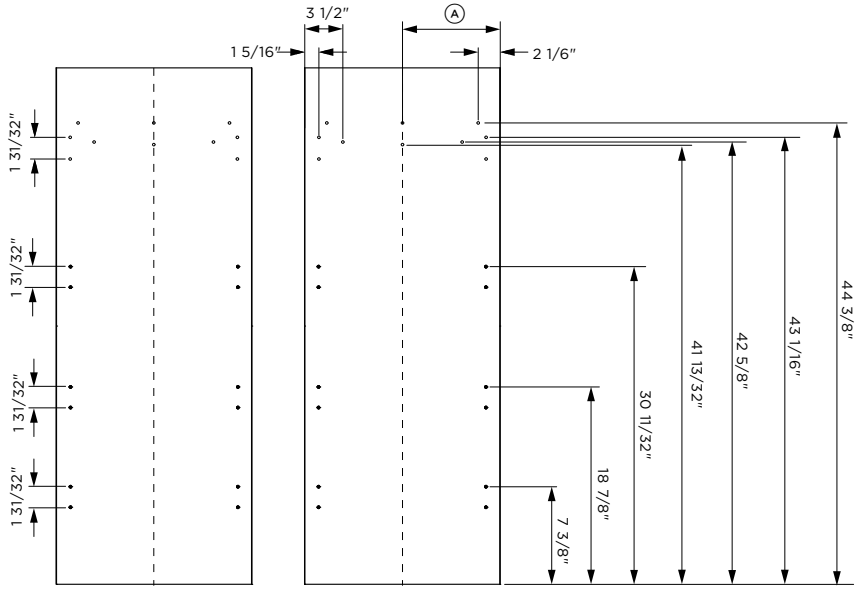

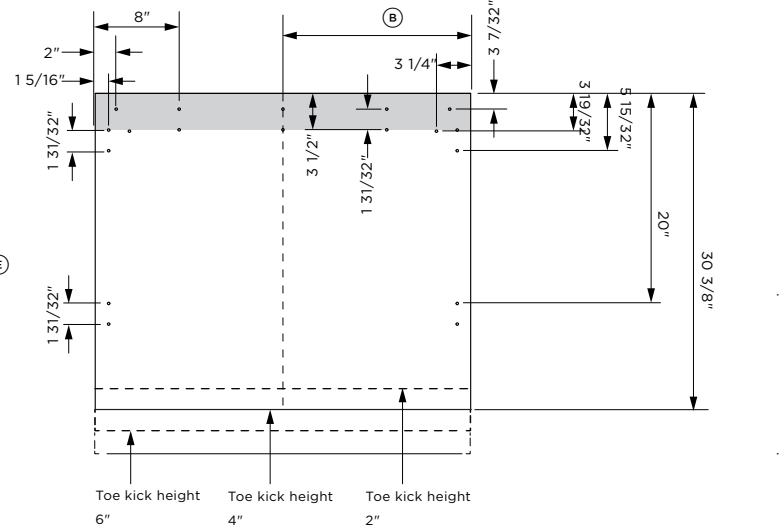

Model no:

RS3684AUVE1

Custom Panel Dimensions	**in**	**mm**
Ⓐ Centerline of door panel - single cavity Centerline of door panel - dual cavity	8 7/8 8 15/16	226 226.75
Ⓑ Centerline of drawer panel - single cavity Centerline of drawer panel - dual cavity	17 7/8 17 29/32	454 455
Ⓒ Height of door panel	49 3/8	1254
Ⓓ Height of drawer panel (standard 4" from floor)	30 11/32	772
Ⓔ Height of drawer panel (2"from floor)*	32 3/8	822
Ⓕ Height of drawer panel (6" from floor)*	28 3/8	721
Ⓖ Width of single door panel - single cavity Width of single door panel - dual cavity	17 13/16 17 27/32	452.5 453.5
Ⓗ Width of drawer single panel Width of drawer dual panel	35 3/4 35 13/16	908 910
Ⓘ Width of toe kick	35 7/8	911
Ⓙ Toe kick height**	2 - 6	51-152
Panel thickness	min 3/4	min 19

Clearance Dimensions*	**mm**
Minimum cabinetry gap clearance from edge of door panel	1/8" or 3mm

*Take into account non-standard panel heights when drilling mounting holes.
**Toe kick can height can vary depending on panel height and ventilation.

Custom door panels, toe kick and handles to be manufactured / fitted by a cabinet maker.


- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

SERVICES

© FISHER & PAYKEL APPLIANCES LIMITED 2026

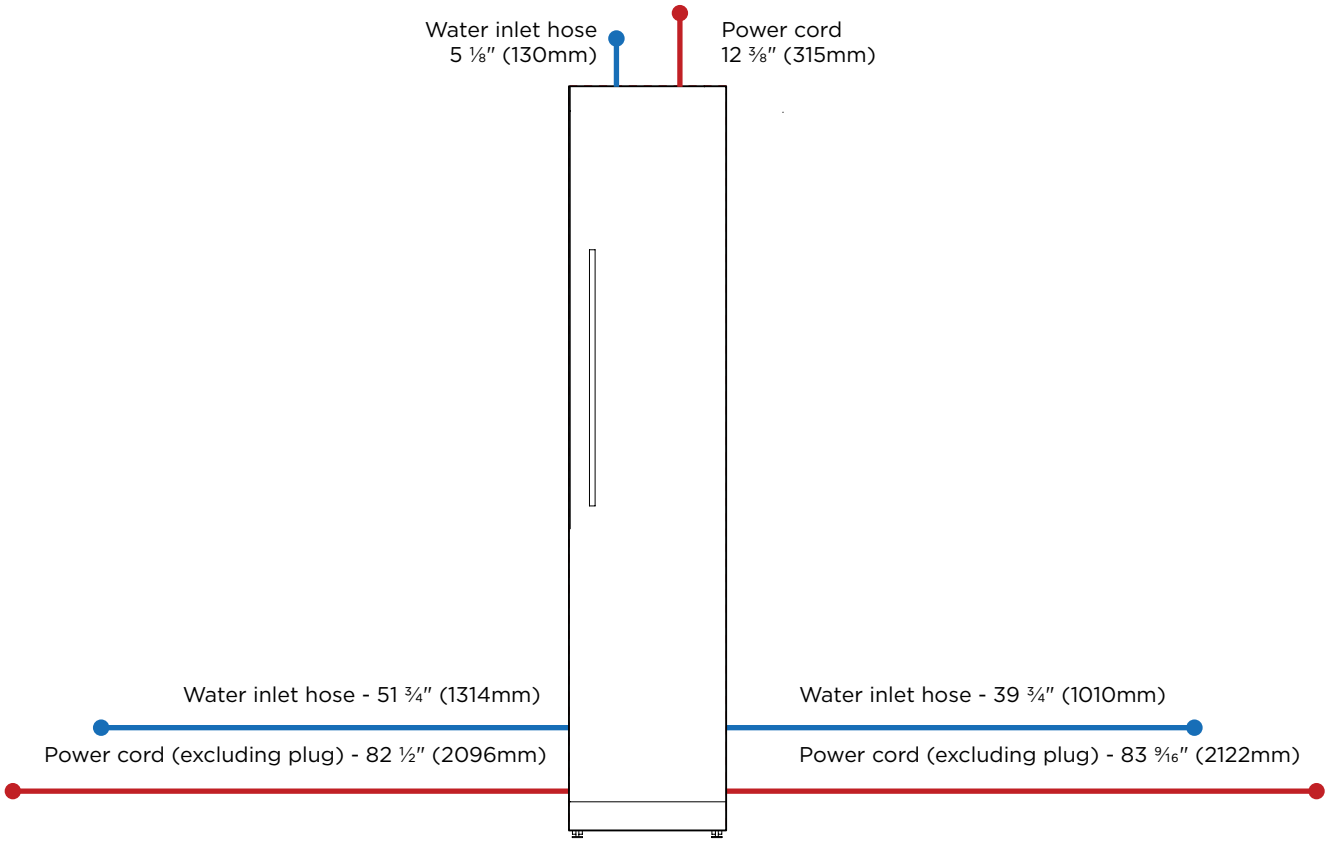

ELECTRICAL SPECIFICATIONS


Model Number	
RS1884FRJE1, RS1884FLJE1, RS1884FLJK1	
Electrical	
Supply	115 V, 60 Hz
Service	10 A Circuit
Connection	Flex cord with plug
Plumbing	
Supply	US/CA 7/16" x 24 UNS. Braided hose
Pressure	min 40 psi (275 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Connections may be located in an adjacent cabinet to either side of the fridge.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16''). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

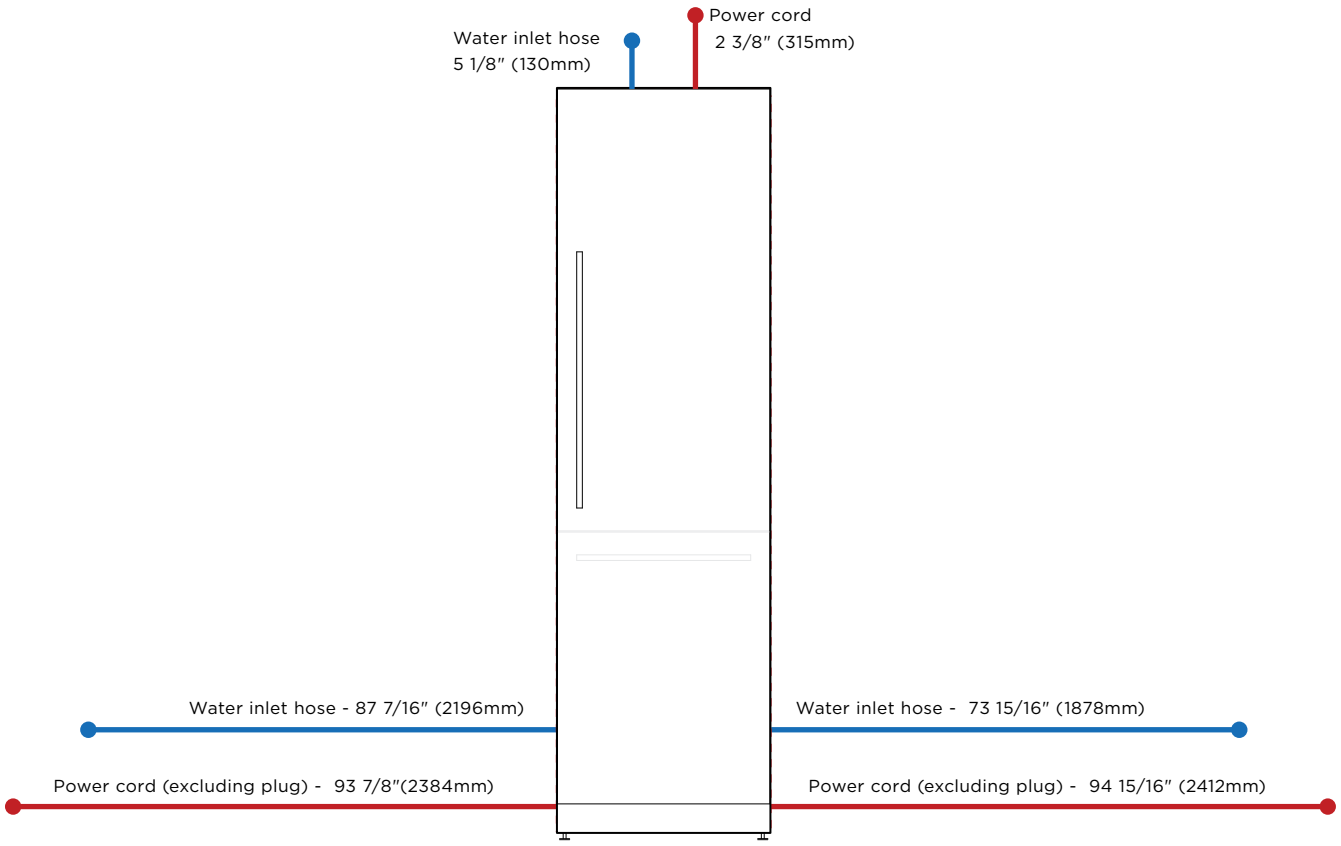

LEFT HAND SIDE

RIGHT HAND SIDE

ELECTRICAL SPECIFICATIONS


Model Number	
RS2484SRHE1, RS2484SLHE1, RS2484FRJE1, RS2484FLJE1, RS2484WRUE, RS2484WLUE, RS2484VL2K, RS2484VR2K RS2484SRHK1, RS2484SLHK1, RS2484SRK1, RS2484SLK1, RS2484WRUK1, RS2484WLUK1, RS2484FLJK1	
Electrical	
Supply	115 V, 60 Hz
Service	10 A Circuit
Connection	Flex cord with plug
Plumbing	
Supply	US/CA 7/16″ x 24 UNS. Braided hose
Pressure	min 40 psi (275 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Connections may be located in an adjacent cabinet to either side of the fridge.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16″). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

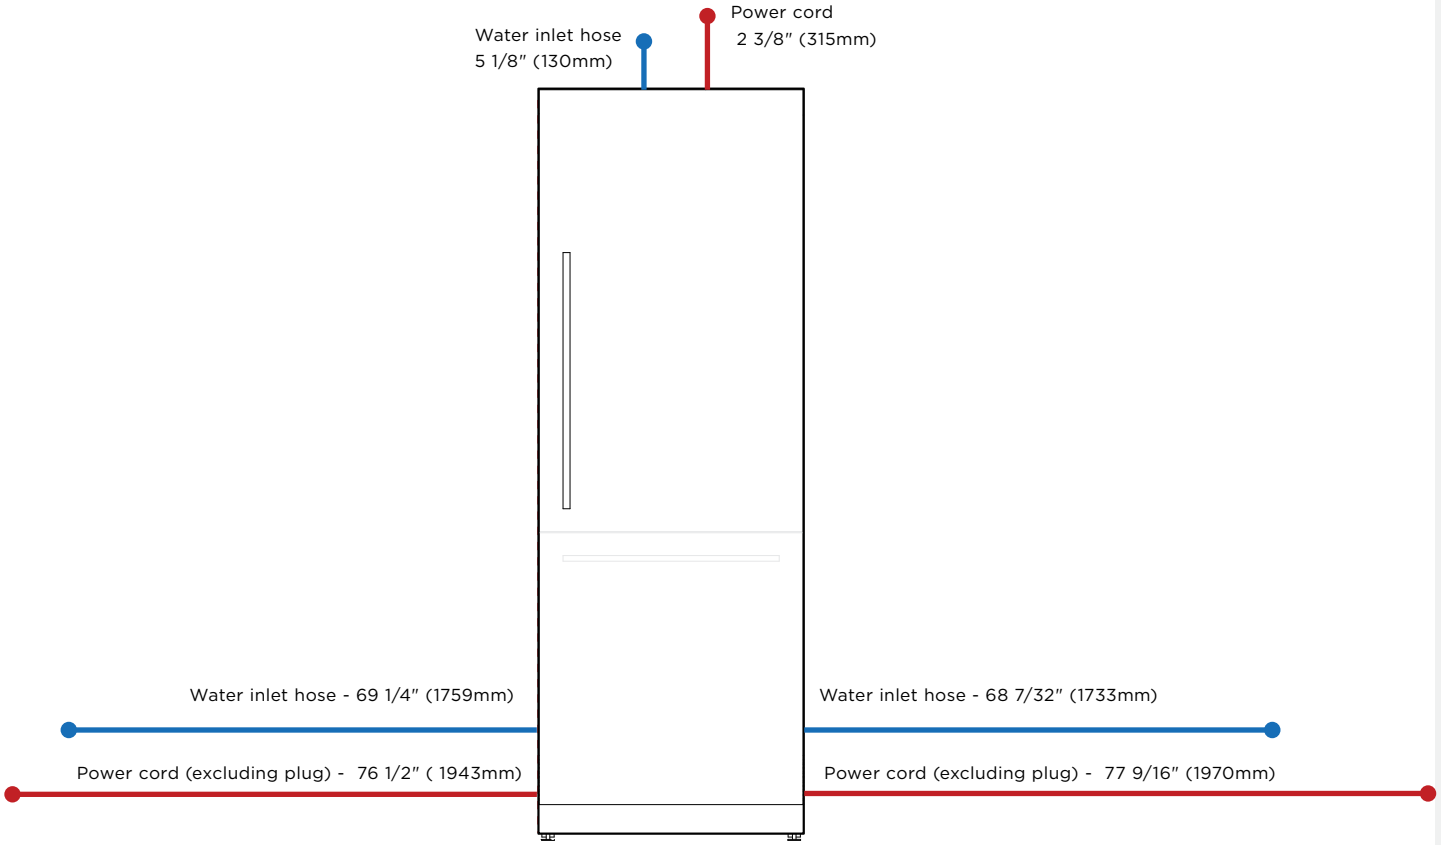

ELECTRICAL SPECIFICATIONS


Model Number	
RS3084SRHE1, RS3084SLHE1, RS3084FRJE1, RS3084FLJE1, RS3084WRUE1, RS3084WLUE1 RS3084SRHK1, RS3084SLHK1, RS3084SRK1, RS3084SLK1, RS3084WRUK, RS3084WLUK1, RS3084FLJK1	
Electrical	
Supply	115 V, 60 Hz
Service	10 A Circuit
Connection	Flex cord with plug
Plumbing	
Supply	US/CA 7/16″ x 24 UNS. Braided hose
Pressure	min 40 psi (275 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Connections may be located in an adjacent cabinet to either side of the fridge.

- - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - INDICATES CABINETRY CLEARANCES
- - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16″). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

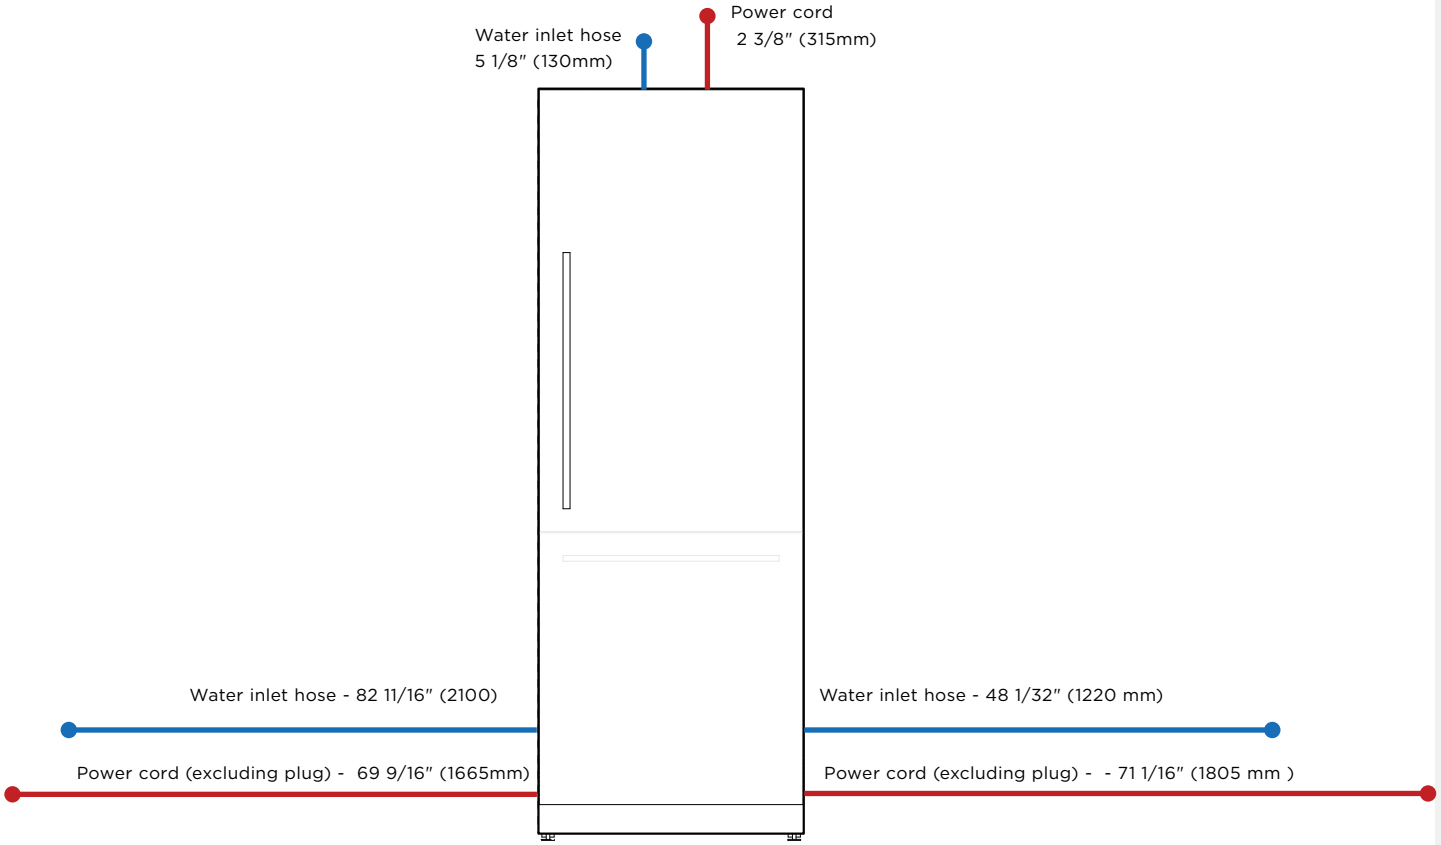

LEFT HAND SIDE

RIGHT HAND SIDE

ELECTRICAL SPECIFICATIONS

Model Number	
RS3684WRUVE, RS3684WLUVE1, RS3684AUVE	
Electrical	
Supply	115 V, 60 Hz
Service	10 A Circuit
Connection	Flex cord with plug
Plumbing	
Supply	US/CA 7/16″ x 24 UNS. Braided hose
Pressure	min 40 psi (275 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Connections may be located in an adjacent cabinet to either side of the fridge.

- - - - - - INDICATES CABINETRY / PRODUCT DATUM
- - - - - - INDICATES CABINETRY CLEARANCES
- - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16″). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

© FISHER & PAYKEL APPLIANCES LIMITED 2026

FISHER & PAYKEL