

36" Glass Canopy Chimney Hood, 600 CFM, HCG56651UC, Stainless Steel



Features and Benefits

Design

- Duct Extension Accessory Kit Available for 9' to 11.5' Ceilings

Performance

- 2 Halogen Lights - 12 Volt, 20 Watt Max., G-4 Base
- 8" round duct at discharge.

Efficiency

- Blower will automatically turn on at high speed if excessive heat is sensed in the control area.
- Absorb odors with charcoal replacement filters.

Convenience

- Convenient timer built into control from 1-60 minutes.
- Signal on LCD display will illuminate as a reminder to check filters for cleaning.
- Audible tone when select controls are pressed.

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in a accompanying product literature or you may contact your account manager for further details.


For more information on our entire line of products, go to boschappliances.com or call 1-800-944-2904.

Copyright ©2020 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Litho Date: 10/2020



36" Glass Canopy Chimney Hood, 600 CFM, HCG56651UC, Stainless Steel

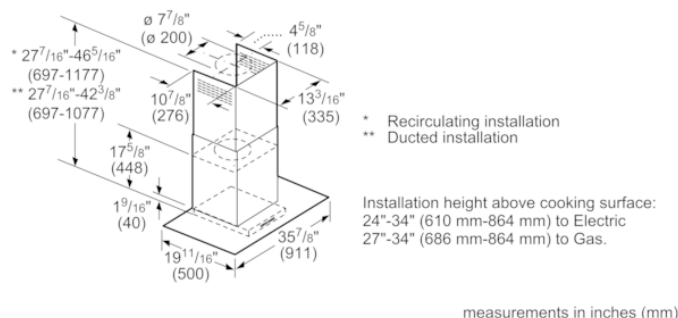

measurements in inches (mm)

Features

Operating Mode	Convertible: Ducted / Recirculating
Number of speed settings	4-stage
Delay Shut off modes	
Silence level (dBA)	
Required accessories	HCGEXT5UC, HCIFILTUC, HCREC5UC
Optional accessories	
Number of lights	2
Type of lamps used	Halogen
Total power of the lamps (W)	
Grease filter material	Washable stainless steel
Grease filter type	Multilayer cassette
Clean filter reminders	

Technical Specification

UPC code	825225909064
Material	Glass
Watts (W)	530
Current (A)	
Volts (V)	120
Frequency (Hz)	60
Approval certificates	CSA, UL
Power Cord Length	
Plug type	no plug
Overall appliance dimensions (HxWxD) (in)	27 7/16" - 42 3/8" / 27 7/16" - 46 5/16" x 35 7/8" x 19 11/16"
Product packaging dimensions (HxWxD) (in)	26.25 x 39.99 x 17.75
Height of the chimney (in)	25 7/8" - 40 13/16" / 25 7/8" - 44 3/4"
Vertical rise height	
Required distance above cooktop/ranges	24"/27"
Net weight (lbs)	56.000
Gross weight (lbs)	63.000
Adjustable feet	
Motor location	Integrated motor in hood chimney
Maximum CFM	600
Diameter of air duct (in) top	8
Diameter of air duct (in) back	
Discharge direction	
No-return airflow flap	Yes

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in a accompanying product literature or you may contact your account manager for further details.

For more information on our entire line of products, go to boschappliances.com or call 1-800-944-2904.
Copyright ©2020 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Litho Date: 10/2020

