



Front Load Perfect Steam TM Gas Dryer with Predictive Dry TM and Instant Refresh - 8.0 Cu. Ft.

710 kWh

Dryer

Version: 10/25

| | Produc | t Specifications | |
|---|-----------------------------|----------------------------------|------------|
| Диков. | | Dryer Cycles | |
| Dryer Air Flow | 200 CFM | Cycle Count | 10 |
| Air Flow Drum Back Type | Painted Steel | Activewear | Yes |
| Drum Material | Painted Steel Painted Steel | | Yes |
| | Yes | Allergen | Yes |
| Dryness Level Selections | 20000 BTU | Delicates Fast Dry | Yes |
| Heating Element Lint Filter | Yes | | Yes |
| | Yes | Heavy Duty | Yes |
| Predictive Dry | 162 | Instant Refresh Mixed Load | Yes Yes |
| Daniel Octions | | | |
| Dryer Options | 7.7 | Normal Timed Dry Time | Yes Yes |
| Anti Static | Yes | Timed Dry Time | |
| Delay Start Time | 1-12 Hours | Towels | Yes |
| Drum Light | Yes | | |
| Dry Boost | Yes | Drying Temperatures | |
| Extended Tumble | Yes | Low | Yes |
| Perfect Steam | Yes | Normal Normal | Yes |
| Wrinkle Release | Yes | High High | Yes |
| | | Sanitize | Yes |
| Dryness Level | | Eco Dry | Yes |
| Max | Yes | | |
| High | Yes | Controls | |
| Normal | Yes | Cancel | Yes |
| Low | Yes | Child Lock | Yes |
| Damp | Yes | Control Lock | Yes |
| | | Cycle Status Lights | Yes |
| Exterior | | Delay Start | Yes |
| Door Latch | Yes | Estimated Time Remaining | Yes |
| Reversible Door | Yes | Pause Function | Yes |
| | | Power On/Off | Yes |
| Electrical Specifications | | Start | Yes |
| Minimum Circuit Required | 15 Amps | | |
| Voltage Rating | 120 V | Dimensions and Volume | |
| voituge italing | 120 1 | Height | 38" |
| Installation | | Width | 27" |
| | V | Depth | 32" |
| Optional Pedestal | Yes | Dryer Drum Capacity | 8 Cu. Ft. |
| Power Cord Included | Yes | Dry Linen Capacity Tested Amount | 11.5 kg |
| Ventilation Type | Vented | Dry Emen Supacity Tested/Amount | 11.0 Ng |
| Performance Certifications and Approvals | | Energy Data | 2.40 |
| ENERGY STAR Certified | Yes | Combined Energy Factor (CEF) | 3.48 |
| | | kWh/cycle | 2.5 kWh |
| | | Iz M/h/xzooz | |

kWh/year

Front Load Perfect Steam TM Gas Dryer with Predictive Dry^{TM} and Instant Refresh – 8.0 Cu. Ft. \$5476\$

Version: 10/25

| Right | to F | Repair | Detai l | s |
|-------|------|--------|----------------|---|
|-------|------|--------|----------------|---|

Right to Repair

Available - Visit
electrolux.ca/en/OwnerSupport/right-to-repair
for more information

General Specifications

| Chime On / Chime Off | Yes |
|----------------------|--------|
| Leveling Legs | Yes |
| Prop 65 Label | Yes |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |


Safety Certifications and Approvals

| builty of uncutons und approvuis | |
|----------------------------------|-----|
| UL Listed | Yes |

Version: 10/25

Installation Diagram

Dryer dimensions

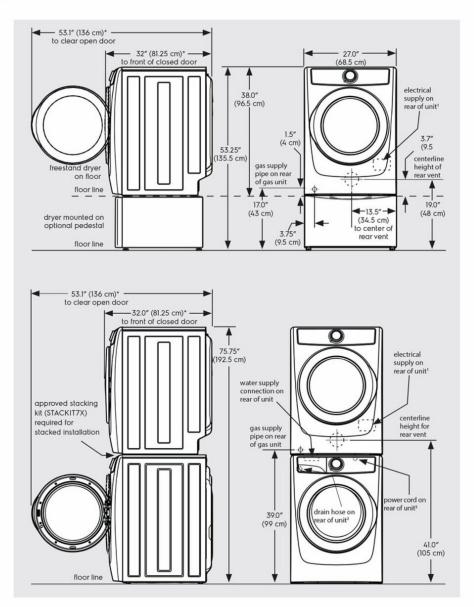

- * Connection of water inlet hose on steam dryer adds 3/4 in. (2 cm) to installation depth.
- Power supply cord length on gas dryer or electric Canadian dryer approximately 60 inches (152.5 cm).
- ² Drain hose length on washer approximately 59 inches (150 cm).
- ³ Power supply cord length on washer approximately 60 inches (152.5 cm).