



18 Cu. Ft. Garage Ready Top Freezer Refrigerator

Top Freezer Refrigerator

Available Products: FFHT1814WB, FFHT1814WW

Available Colors: Black, White

Version: 10/25

Product Specifications

Refrigerator

Air Filter Ready	Yes
Crisper Color	Clear
Door Bin Color	White
Interior Lighting	LED
Shelf Material	Wire
Number of Adjustable Gallon Door Bins	1
Number of Fixed 2 Liter Door Bins	2
Number of Adjustable Shelves	2
Number of Crispers	2

Ice Maker

Ice Maker Ready	Yes
-----------------	-----

Controls

Control Location	Top Center of Fresh Food
------------------	--------------------------

Dimensions and Volume

Height With Hinge	66 3/8"
Height Without Hinge	65 7/8"
Width	30"
Width of Cabinet	30"
Depth of Cabinet	26 5/8"
Depth With Door	30 3/8"
Depth With Door 90° Open	57"
Depth With Door and Handle	30 3/8"
Freezer Capacity	4.9 Cu. Ft.
Fresh Food Capacity	13.4 Cu. Ft.
Total Capacity	18.3 Cu. Ft.

General Specifications

Annual Energy	369 kWh
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Performance Certifications and Approvals

ENERGY STAR Certified	Yes
ENERGY STAR Most Efficient	Yes

Accessories

Optional Ice Maker Kit	IM117000
------------------------	----------

Freezer

Automatic Defrost	Yes
Door Bin Color	White
Shelf Material	Glass
Number of Fixed Door Bins	2
Number of Adjustable Shelves	1

Garage Ready

Garage Ready	Yes
--------------	-----

Exterior

Door Finish	Textured
Door Swing	Reversible

Electrical Specifications

Amps @ 120 Volts	3 Amps
Minimum Circuit Required	15 Amps

Certifications and Approvals

ADA Compliant	Yes
---------------	-----


Safety Certifications and Approvals

UL Listed	Yes
-----------	-----


Right to Repair Details

Right to Repair	Partially Available - Visit frigidaire.ca/right-to-repair for more information
-----------------	--

Installation Diagram

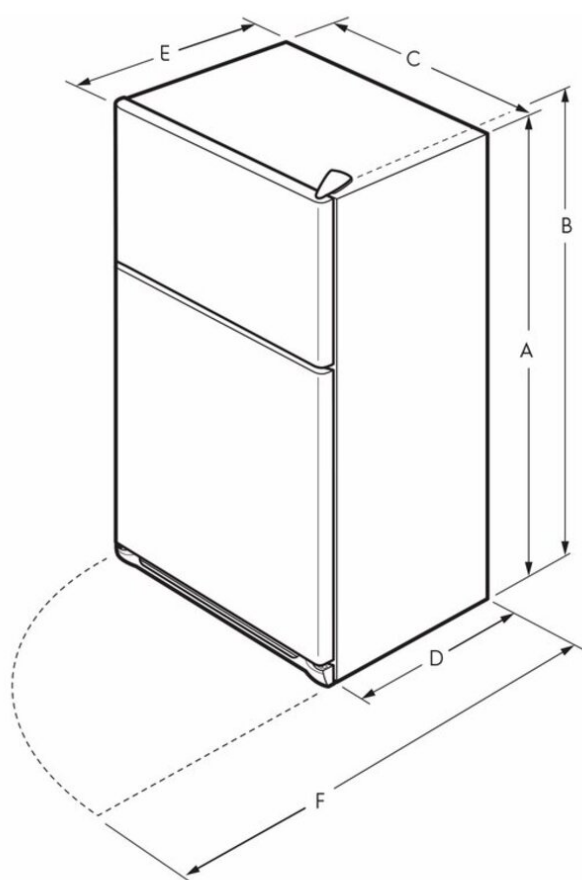

A	65 ⁷ / ₈ "
B	66 ³ / ₈ "
C	30"
D	26 ⁵ / ₈ "
E	30 ³ / ₈ "
F	57"

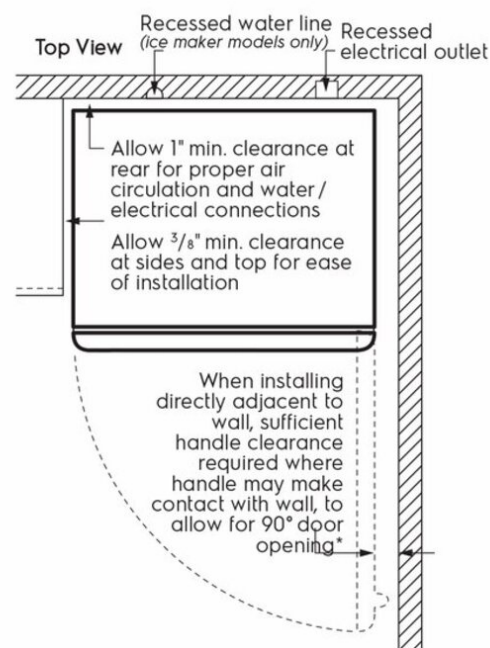

* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)