

30" Dual-Fuel Freestanding Range

Dual Fuel Range

Version: 10/25

Product Specifications

Cooking Controls

Bake	Yes
Bread Proof	Yes
Broil	Yes
Child Lock	Yes
Convection Bake	Yes
Convection Roast	Yes
Cook Time	Yes
Delay Start	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Probe	Yes
Steam Clean	Yes
Temperature Display	Yes

Cooktop

Cooking Surface Type	Gas
Grate Material	Cast Iron
Grate Quantity	3
Grate Style	Continuous
Sealed Burners	Yes
Total Number of Burners	5

Controls

Sabbath Mode	Yes
--------------	-----

Dimensions and Volume

Minimum Height	35 3/8"
Maximum Height	36 5/8"
Width	29 469/500"
Depth	25 7/8"
Depth With Door 90° Open	46 86/125"
Oven Interior Height	17 6/25"
Oven Interior Width	24 1/4"
Oven Interior Depth	16"
Oven Capacity	4.6 Cu. Ft.

Installation

Adjustable Leveling Legs	Yes
Included Power Cord Type	4-Prong Plug
LP Conversion Kit Included	Yes
Power Cord Included	Yes

Oven

Bake Element	3300 Watts
Bake Element Type	Hidden
Broil Element	3300 Watts
Convection Element	2950 Watts
Convection Type	True
Number of Convection Fans	1
Number of Rack Positions	6
Oven Interior Color	Gray
Oven Light Quantity	2
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Ladder
Rack Type 1	Flat
Rack Type 1 Quantity	2
Rack Type 2	Glide
Rack Type 2 Quantity	1
Window Type	Extra Large Window

Cooktop Performance

Right Front Element Burner	18,000 / 750 BTU Dual
Left Front Element Burner	18,000 / 750 BTU Dual
Right Rear Element Burner	12000 BTU
Left Rear Element Burner	12000 BTU
Center Element Burner	10000 BTU

Display

Control Location	Front
Display Type	LED

Electrical Specifications

Minimum Circuit Required	30 Amps
Voltage Rating	240 V

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year


Right to Repair Details

Right to Repair	Partially Available - Visit electrolux.ca/en/Owner-Support/right-to-repair for more information
-----------------	---


Safety Certifications and Approvals

CSA Listed	Yes
RoHS	Yes

Installation Diagram

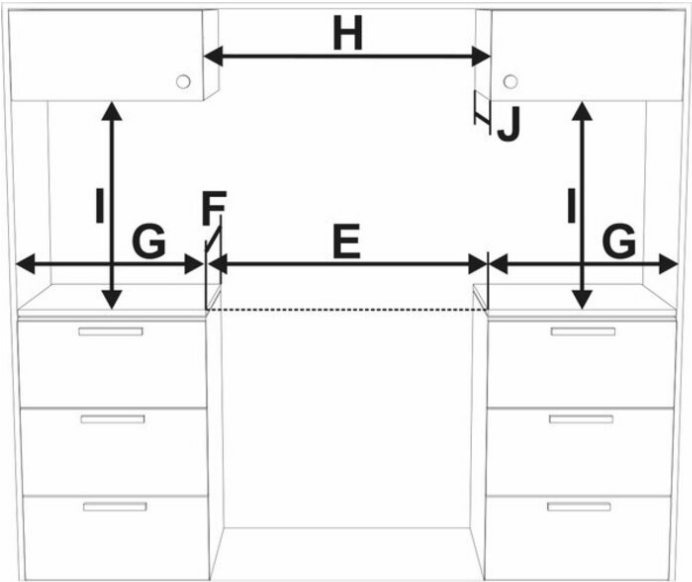

E	min. 762 mm	min. 30"
F	628 mm	24" 5/8
G	min. 508 mm	min. 20"
H	min. 762 mm	min. 30"
I	min. 457 mm	min. 18"
J	max. 330 mm	max. 13"

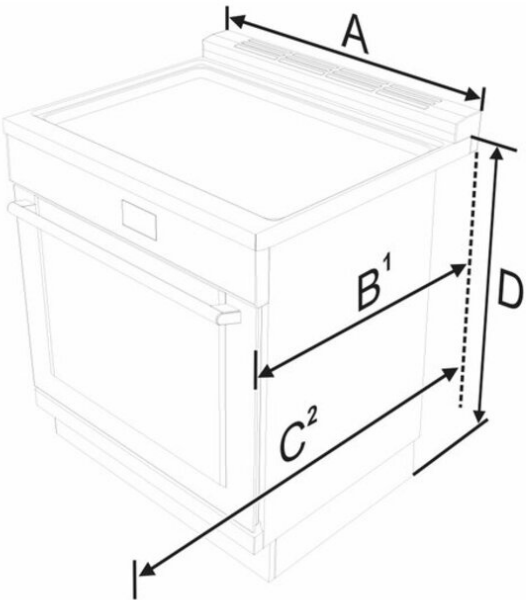

A	760 mm	29" 15/16"
B¹	min: 654 mm max: 658 mm	min: 25 3/4" max: 25 14/16"
C²	1186 mm	46 11/16"
D	min: 898 mm max: 930 mm	min: 35 6/16" max: 36 5/8"

