



30" Overhead Range Hood

Under Cabinet

Available Products: FHWC3040MS

Available Colors: Stainless Steel

Version: 10/25

Product Specifications

Ventilation System

Exhaust Fan Speeds	3
Maximum Air Flow Capacity	300 CFM
Maximum Sones Rating	7.7 sone
Charcoal Filter Included	Yes

Surface Light System

Lighting Type	Halogen
Number of Lights	2

Electrical Specifications

Voltage Rating	120 V
----------------	-------

Certifications and Approvals

ADA Compliant	No
---------------	----

Right to Repair Details

Right to Repair	Partially Available - Visit frigidaire.ca/right-to-repair for more information
-----------------	---

Controls

Control Type	Push Button
--------------	-------------

Dimensions and Volume

Height	5"
Width	30"
Depth	18 5/8"


General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

ETL Listed	No
UL Listed	Yes

Installation Diagram

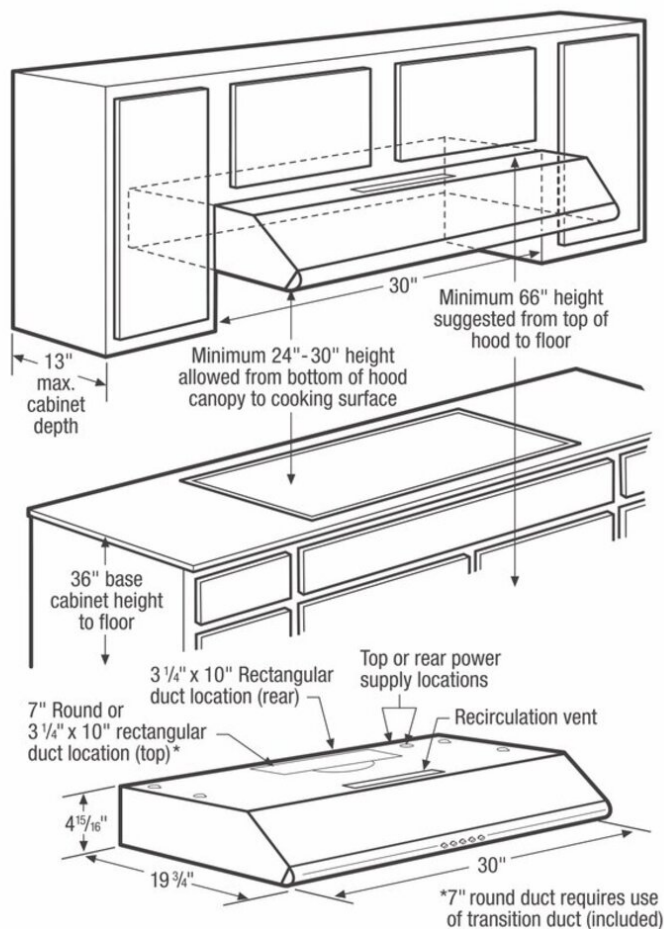


Exhaust Options


Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required.

For detailed duct preparation and installation specifications, refer to installation instructions on web.

Outside Vertical – 7" Round Duct Cabinet Bottom

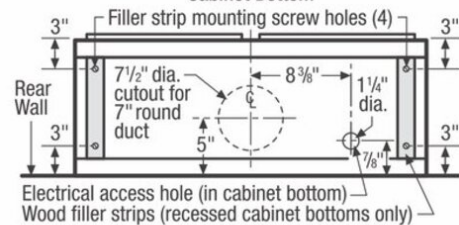

Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

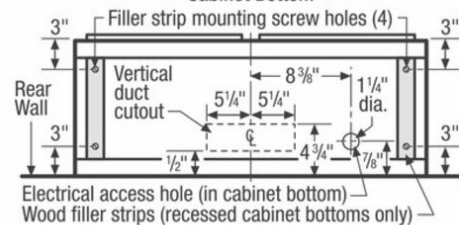

Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

