PE244INDXV

24” INDUCTION COOKTOP XV
BLACK GLASS



Experience instantaneous touch-through glass precision control

Select individual induction heating zones up to 2700 Watt performance reducing time-to-boil by up to 50%

Benefit from maximized cookware size accomodation
1 full surface bridge function setting with up to 5200 Watts with booster

Have full control over the cooking process with timer functions for each heating zone


Enjoy the utmost in easy cleaning of the tempered ceramic glass surface

PRODUCT FEATURES	
COOKTOP	
Maintop	4 induction zones
Heating zone power	Front Left Ø 7'' 2000W (2500 W booster) Back Left Ø 7'' 2000W (2700 W booster) Front Right Ø 7'' 1400W (1800 W booster) Back Right Ø 7'' 2000W (2700 W booster)
Controls	Touch-through-glass slider
Bridge function	Yes
Timer	Timed cooking function option for each induction zone
Power levels	9 + Booster
Stop & Recall function	Yes
Auto-Stop	Yes
Residual Heat Indicator	Yes
TECHNICAL SPECIFICATIONS	
Electrical supply	208-240 V 60 HZ - 7400 W 30 Amp dedicated circuit
Power connection	Hardwired with 40 3/16'' power cord
Certification	ETL
Packaging dimensions and weight	W 25.98'' H 23.23'' D 6.10'' 34.83 lbs


PE244INDXV

24” INDUCTION COOKTOP XV
BLACK GLASS

PRODUCT AND CUTOUT DIMENSIONS

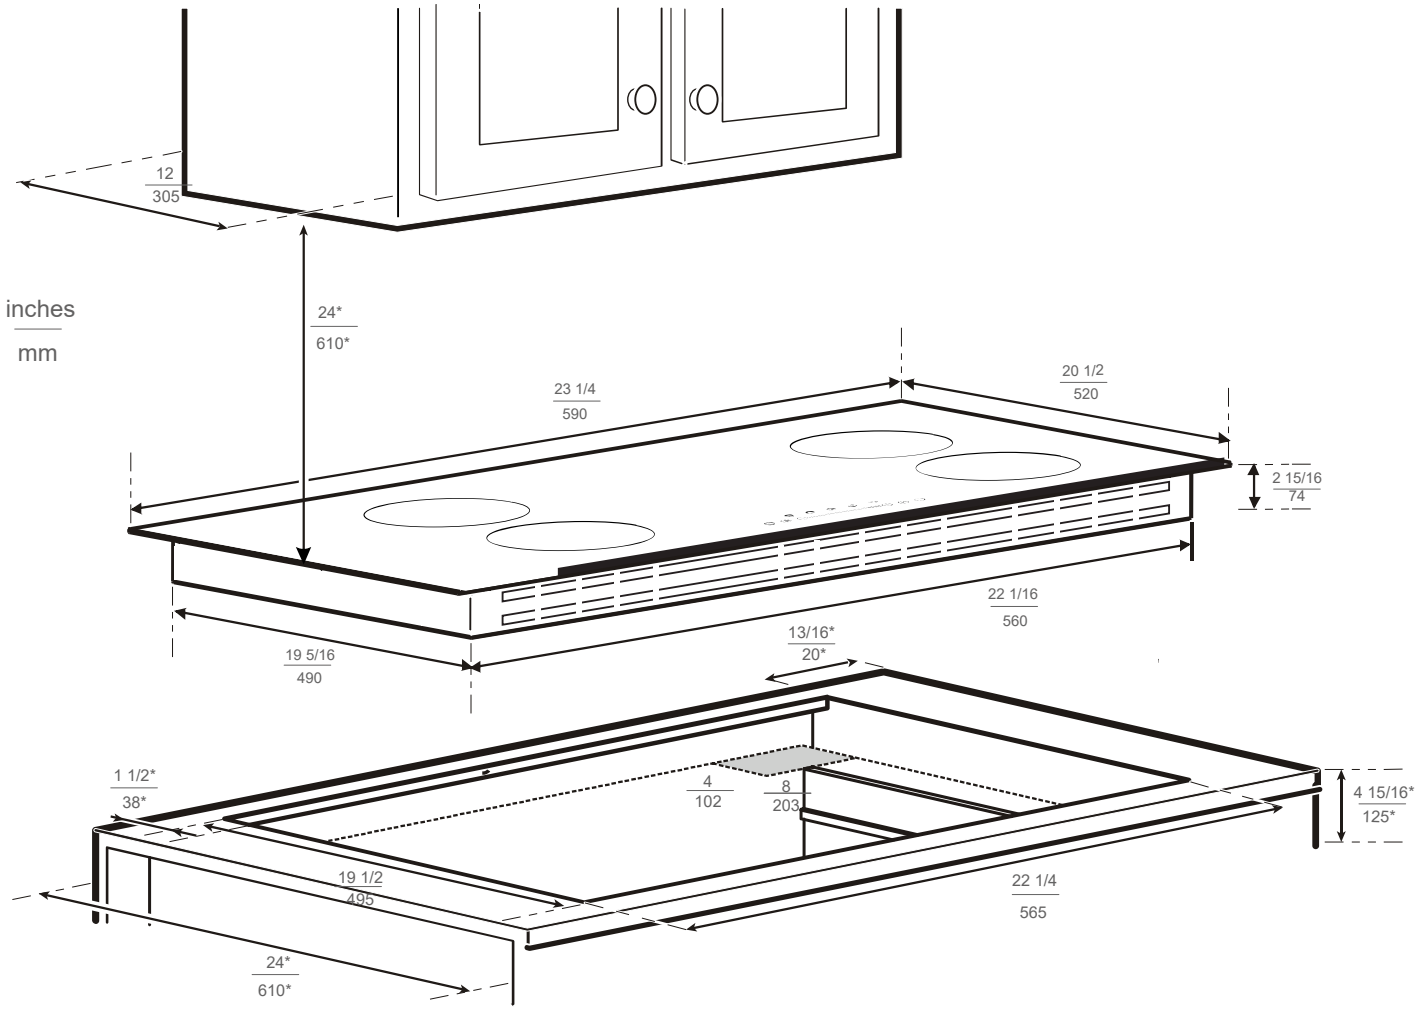

* minimum dimension to be grante

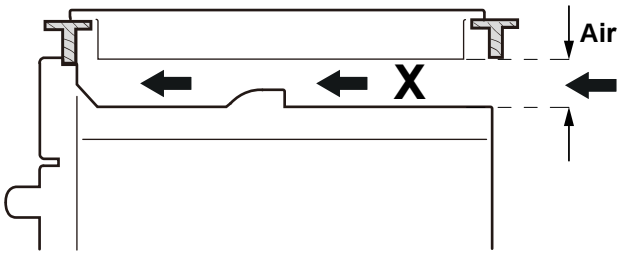

Air inlet

It is very important to keep 2 3/4″ (X) distance between the cooktop and the oven.

For complete installation details refer to the installation manual at us.bertazzoni.com or ca.bertazzoni.com

Disclaimer: while every effort has been made to ensure the accuracy of the information contained in this document, Fratelli Bertazzoni reserves the right to change it at any time without notice. For detailed installation instructions, consult the installation manual. Fratelli Bertazzoni, Bertazzoni and the winged wheel brand icon are registered trademarks of Bertazzoni Spa.