

48" Series 9 8 Burner Gas Rangetop, Natural Gas

Series 9 | Professional



Eight burners for when you need maximum performance and cooktop space – great for those who love to cook for a crowd.


- Your burners can deliver anything from very high 23,500 BTU heat for seriously fast boiling, to the most gentle flame for simmering
- Continuous surface grates designed for pots and pans to move safely across the cooktop

DIMENSIONS

| | |
|--------|----------|
| Height | 8 5/16 " |
| Width | 47 7/8 " |

Depth

28 "

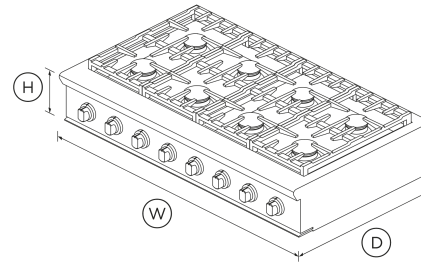

The continuous surface grates are designed for pots and pans to move safely across the rangetop. Full coverage, deep-platform style grates are designed so heat goes directly onto the pot rather than the grates themselves, for a faster boil and energy efficiency.

Information At A Glance

LED halo control dials provide information at a glance and assist in alerting you if any burners are accidentally left on.

Easy Cleaning

These rangetops have sealed burners and a single sheet cooking surface which, combined with a commercial-style stainless steel finish and dishwasher-safe grates, allow easy cleaning.

Complementary Design

Built to last with distinctive, bold styling, this rangetop is designed to match the Fisher & Paykel Professional style family of appliances.

FEATURES & BENEFITS

Perfect Heat

Sealed Dual Flow Burners™ deliver rangetop power up to 23,500 BTU (NG models) for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

Precise Control

From the highest to the lowest temperatures you get total control with halo-illuminated rangetop dials. A precise full surface simmer is delivered across all burners.

Cooking Flexibility

SPECIFICATIONS

Burner ratings

| | |
|------------------------|----------|
| Maximum burner power | Yes |
| Power back centre | 18500BTU |
| Power back centre (2) | 18500BTU |
| Power back left | 18500BTU |
| Power back right | 18500BTU |
| Power front centre | 18500BTU |
| Power front centre (2) | 18500BTU |
| Power front left | 23500BTU |
| Power front right | 23500BTU |

Controls

Metal illuminated dials •

Performance

Sealed Dual Flow Burners™ 8
 Simmer on all burners 140 °F

Power Requirements

Amperage 15 A
 Supply frequency 60 Hz
 Supply voltage 120 V

Product Dimensions

Depth 28 "
 Height 8 5/16 "
 Width 47 7/8 "

Recommended Back Guards Ventilation

Minimum CFM 1200 BTU
 Pro hood VS48

SKU 71384

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) 2D-DWG Gas Rangetop
- [↓](#) 2D-DXF Gas Rangetop
- [↓](#) Archicad Gas Rangetop
- [↓](#) Data Sheet Gas Rangetop
- [↓](#) Installation Guide
- [↓](#) Planning Guide Gas Rangetop
- [↓](#) Revit Gas Rangetop
- [↓](#) Rhino
- [↓](#) Right To Repair Declaration (English, French)
- [↓](#) Sketchup Gas Rangetop
- [↓](#) User Guide

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
 T 1.888.936.7872 W www.fisherpaykel.com