

GR486C



FEATURES

- Control temperature precisely with six dual-stacked, sealed gas burners for higher highs, lower lows
- Rely on a 16,000 Btu infrared charbroiler for more succulent steaks, chops, and burgers
- Enjoy quicker heat and more even cooking with this large capacity gas convection oven
- Multi-task with an additional 18" oven.
- Clean up sloshes and spills easily with the seamless, sealed, black porcelain-coated burner pans
- Produce crisper crusts and faster sears with the powerful infrared interior broiler
- Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety
- Move pots and pans easily across continuous cast-iron grates
- Find your kitchen style with a choice of iconic red, black, or brushed stainless steel control knobs

ACCESSORIES


- 18" Full-Extension Oven Rack
 - 2-Burner Wok Grate
 - 2-Burner Wok Grate
 - Bake Stone Kit
 - Filler Trim
 - Front Leg Covers
 - Full-Extension Ball Bearing Rack
 - Stainless Steel Kickplate
 - Brushed stainless, polished brass, chrome, or brushed brass bezels
 - High altitude conversion kits available
 - Signature red, black, brushed stainless, brushed gray, or brushed brass knob kits
 - 5" and 10" stainless steel risers, and 20" riser with shelf
- Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

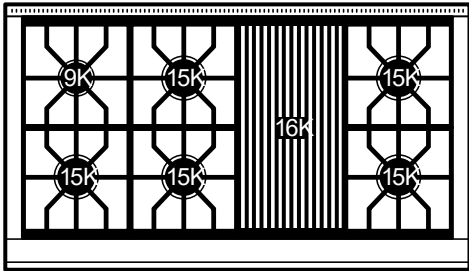

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 5 - 15,000 Btu burners
- 1 - 16,000 Btu charbroiler

OVEN INTERIOR SPECIFICATIONS


- 30,000 Btu oven burner
- 18,000 Btu oven broiler




PRODUCT SPECIFICATIONS

Model	GR486C
Dimensions	47 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	13 1/2"W x 18 5/8"H x 17"D
Oven 2 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	1.6 cu. ft.
Oven 1 Overall Capacity	2.5 cu. ft.
Oven 2 Usable Capacity	2.9 cu. ft.
Oven 2 Overall Capacity	4.4 cu. ft.
Door Clearance	19 1/2"
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT
Receptacle	3-prong grounding-type

ELECTRICAL




GAS




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

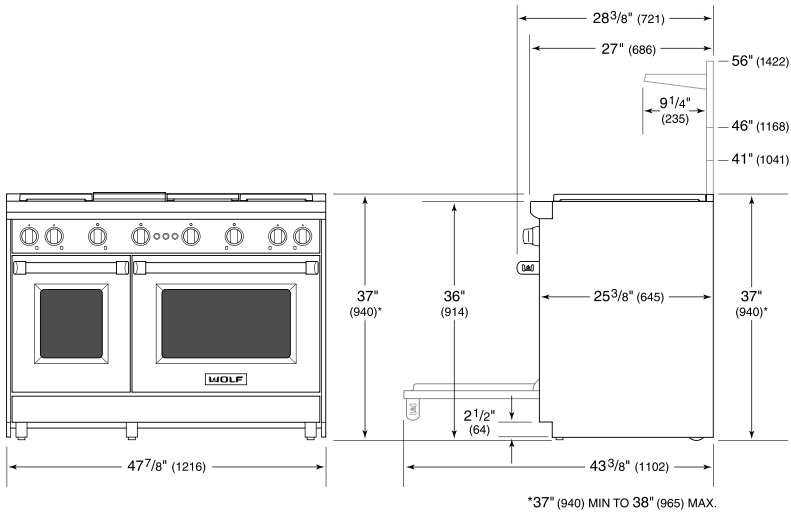

STANDARD INSTALLATION

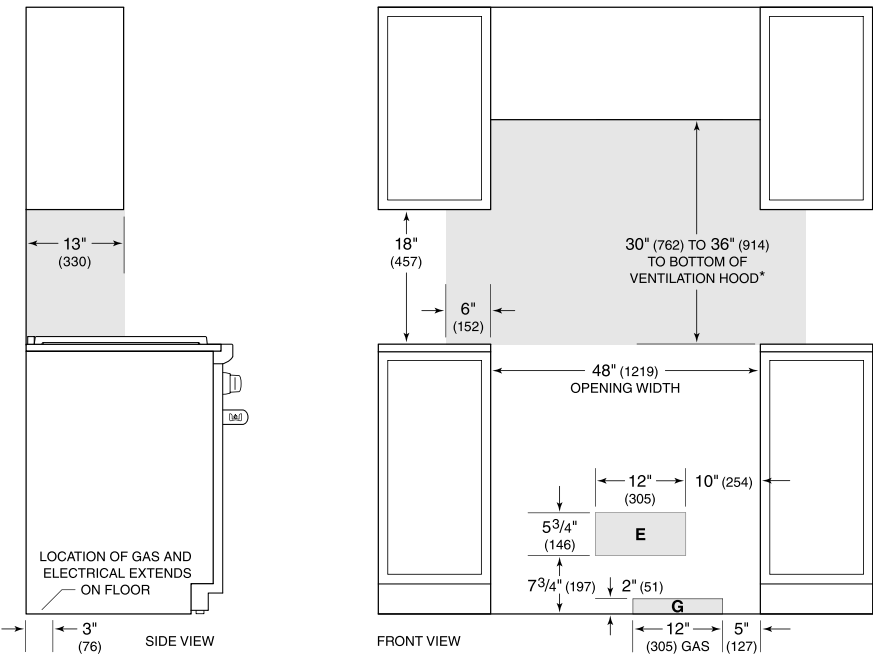

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.