


DUCTLESS ACCESSORIES

WIND BAFFLES & TOP COVERS

Operating Conditions	Recommended Accessories			
	1 Front Wind Baffle	2 Side Wind Baffle	3 Back Wind Baffle	4 Top Cover
Low Ambient Cooling below 23°F (5°C) (server/mechanical room)	Required	Required	Required	Required
Low Ambient Heating below 5°F (-15°C)	-	Strongly Recommended	Strongly Recommended	Strongly Recommended
Unit installed on a flat roof or facing prevailing wind	Required	-	-	-

Fabricated from durable 20 gauge G90 galvanized steel and engineered to provide optimal performance when operating the outdoor unit in cold, harsh climates.

A front wind baffle is required for all climates when mounted on a flat roof or facing prevailing winds.

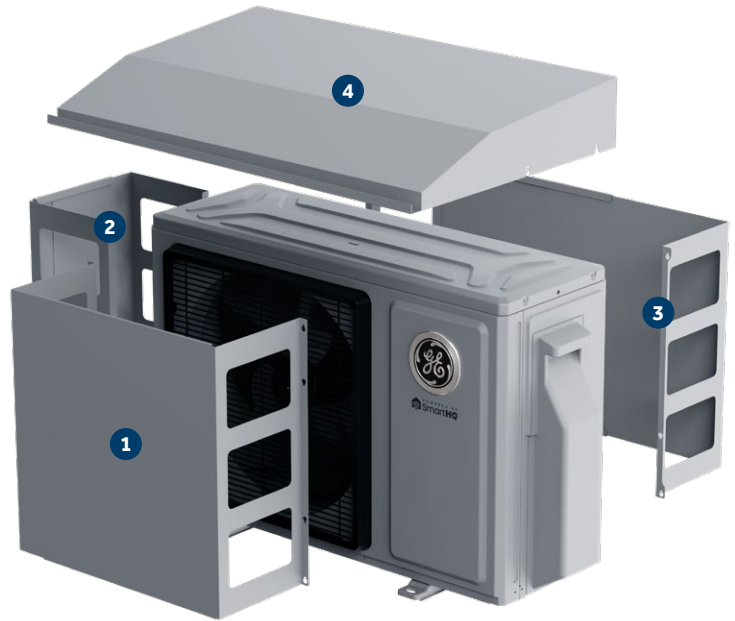

OUTDOOR UNIT ACCESSORY COMPATIBILITY TABLE

	OUTDOOR UNITS																							
	CALIBER						ALTITUDE						ENDURE				ENDURE MULTI			ALTITUDE MULTI				
	115V		230V																					
1G09CB1BEA	1G12CB1BEA	1G09CB2BEA	1G12CB2BEA	1G18CB2BEA	1G24CB2BEA	1G09AD2BEA	1G12AD2BEA	1G15AD2BEA	1G18AD2BEA	1G24AD2BEA	1G3036AD2BEA	1G09ED2BEA	1G12ED2BEA	1G18ED2BEA	1G24ED2BEA	1G3036ED2BEA	2G20ED2BEA	3G24ED2BEA	4G36ED2BEA	5G42ED2BEA	2G18AD2BEA	3G24AD2BEA	4G36AD2BEA	
FRONT OR BACK WIND BAFFLES (If both a front and back wind baffle are needed, order two (2) of the required part)																								
UAWB15GA	●	●	●	●	●		●	●	●	●		●	●											
UAWB30GA						●					●	●		●								●	●	
UAWB31GA															●		●	●						●
UAWB51GA																●			●	●				
SIDE WIND BAFFLES																								
UASWB15GA	●	●	●	●	●		●	●	●	●		●	●											
UASWB30GA						●					●	●		●								●	●	
UASWB31GA															●		●	●						●
UASWB51GA																●			●	●				
TOP COVERS																								
UATC15GA	●	●	●	●			●	●																
UATC20GA					●				●	●			●	●										
UATC21GA																					●	●		
UATC30GA															●									
UATC31GA																●		●	●					●
UATC35GA						●				●	●													
UATC51GA																●			●	●				
5" CENTRAL CONTROLLER																								
UACT32A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

DUCTLESS ACCESSORIES

CASSETTE PANELS

Required for cassette indoor units; sold separately.
Remote controller (WJ26X35396) is included with cassette panel.



GACCP01GA

4-Way Compact
Cassette Panel


Fits Models:
US09CB2BEA
US12CB2BEA
US18CB2BEA



GALCP01GA

4-Way Large
Cassette Panel

Fits Models:
US24LB2BEA
US30LB2BEA
US36LB2BEA




GAABP0718A

One-Way Cassette Panel

Fits Models:
US07AB2BEA
US09AB2BEA
US12AB2BEA
US18AB2BEA


SUPPLY PLENUMS

Supply plenums for ducted indoor models.



UAPT0912A

Fits Models:
US09MB2BEA
US12MB2BEA



UAPT1824A

Fits Models:
US18MB2BEA
US24MB2BEA



UAPT3048A

Fits Models:
US30MB2BEA
US36MB2BEA
US42MB2BEA
US48MB2BEA

REFRIGERANT DETECTION SENSOR (RDS)




UALS01A

Ductless Refrigerant
Detection Sensor

Note: See room sizing requirements to determine if the Refrigerant Detection Sensor (RDS) is required and needs to be purchased separately for highwall and cassette indoor units. RDS is factory-installed on 6K and 9K-24K (models ending in "B") premium highwalls, console, and ducted units.

MERV RETURN AIR FILTER BOXES

MERV return air filter boxes for ducted indoor models.

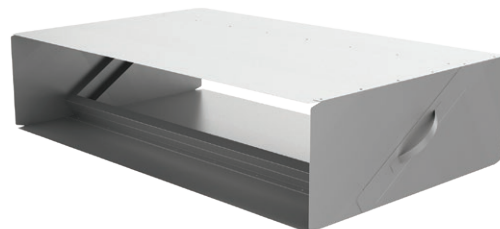

UAMFB0912A

Fits Models:
US09MB2BEA
US12MB2BEA

UAMFB1824A

Fits Models:
US18MB2BEA
US24MB2BEA

UAMFB3048A

Fits Models:
US30MB2BEA
US36MB2BEA
US42MB2BEA
US48MB2BEA

DUCTLESS ACCESSORIES

CONTROLLERS

Controllers from GE Appliances allow you to take command of your environment. With convenient user-friendly button layouts and clear digital displays, the system can be easily set to meet and maintain comfort levels.

WIRED CONTROLLER



Compatible with all indoor unit types.

	GACT17B
Power Supply	12V AC
Controllable Indoor Groups	Up to 16
On/Off	•
Modes	Auto-Cool-Dry-Heat-Fan-Auto
Precise Temperature Control +/- 1°F (+/- 0.5°C)	•
Fan Speed Adjustment	•
Turbo	•
Quiet	•
Airflow Direction - Up/Down	•
Airflow Direction - Left/Right	•
Four-Way Cassette Blade Control	
Indoor Temperature Display	•
Filter Change Reminder	500 hr
Clock	
Error Code Reporting/Recording	•
Control Lock	•
Daily Program	
Weekly Program	
Sleep	
Backlight	•
Fahrenheit/Celsius Display	•
Temperature Range Limit	•
Temperature Compensation	•
Static Pressure Setting	•
Groups Setting	•
Password	

REMOTE CONTROLLERS



Ships with standard highwalls.



Ships with consoles.



Ships with premium highwalls & cassette panels.

	WJ26X35395	WJ26X35813	WJ26X35396
Individual Control	•	•	•
Backlight	•	•	•
Up/Down Louver Oscillating Control	•	•	•
Left/Right Louver Oscillating Control			•
Four-Way Cassette Air Supply Control			•
Child Lock	•	•	•
Indoor LED Display On/Off	•	•	•
Fahrenheit/Celsius Display	•	•	•
Precise Temperature Control +/- 1°F (+/- 0.5°C)	•	•	•
Motion Sensor			•

5" CENTRAL CONTROLLER

5" LED Touch Screen

A vibrant and intuitive interface for easy navigation and control.

Integration Capability

Seamlessly integrates both ductless and central HVAC systems for unified management.

Multi-Zone Control

Manages up to 31 ductless zones and 1 central 24V HVAC zone, providing comprehensive climate control.



	UACT32A
Screen Saving	•
Backlight	•
Power Supply	24VAC*
Max. IDUs Controllable	31 + (1) 24VAC Central Zone
Indoor/Set-Point Temperature Display	•
Interlock Input	•
Interlock Output Dry Contact	•
Temperature Set Range	60-86°F (16-30°C)
Zones	Up to 31 Zones
Modes	Cool, Heat, Auto, Dry, Fan
Fan Speeds	Low, Med, High
Group Control	•
Individual IDU Control	•
Dual System Rotational Operation	•
Temperature Set Range	40-99°F (5-37°C)
Humidity	Display in %
Mode	Cool, Heat, Auto
Fan Speed	Auto, Circulating, On
WiFi/Alexa/Google Home	•

*If not connecting to 24V central HVAC system, a field supplied 24VAC transformer is needed.

DUCTLESS ACCESSORIES

INDOOR UNIT ACCESSORY COMPATIBILITY TABLE

		Remote Controllers			Wired Controller	Refrigerant Detection Sensor (RDS)
						
	Model Number	WJ26X35395	WJ26X35813	WJ26X35396	GACT17B	UALS01A
Caliber 115V Highwall	GS09WB1BEA	●			○	○
	GS12WB1BEA	●			○	○
Standard Highwall	GS07WB2BEA	●			○	○
	GS09WB2BEA	●			○	○
	GS12WB2BEA	●			○	○
	GS15WB2BEA	●			○	○
	GS18WB2BEA	●			○	○
	GS24WB2BEA	●			○	○
	GS30WB2BEA	●			○	○
	GS36WB2BEA	●			○	○
Premium Highwall	GS06WP2BEA			●	○	●
	GS09WP2BEA			●	○	○
	GS09WP2BEB			●	○	●
	GS12WP2BEA			●	○	○
	GS12WP2BEB			●	○	●
	GS18WP2BEA			●	○	○
	GS18WP2BEB			●	○	●
	GS24WP2BEA			●	○	○
4-Way Compact Cassette	US09CB2BEA					○
	US12CB2BEA					○
	US18CB2BEA					○
	GACCP01WA*			●	○	
4-Way Large Cassette	US24LB2BEA					○
	US30LB2BEA					○
	US36LB2BEA					○
	GALCP01WA*			●	○	
One-Way Cassette	US07AB2BEA					○
	US09AB2BEA					○
	US12AB2BEA					○
	US18AB2BEA					○
	GAABP0718A*			●	○	
Console	US09FB2BEA		●		○	●
	US12FB2BEA		●		○	●
	US18FB2BEA		●		○	●
Mid-Static Ducted	US09MB2BEA				⊙	●
	US12MB2BEA				⊙	●
	US18MB2BEA				⊙	●
	US24MB2BEA				⊙	●
	US30MB2BEA				⊙	●
	US36MB2BEA				⊙	●
	US42MB2BEA				⊙	●
	US48MB2BEA				⊙	●

*Cassette Panel

● = Included ⊙ = Required, sold separately ○ = Optional; sold separately

See Outdoor Unit Accessory Compatibility Table for 5" Central Controller compatibility.



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

©Copyright 2025 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

www.GEAppliancesAirAndWater.com

Pub No. 25-GDAG01
Rev. 01-29-26