

MVHP036MV2AA
MRV-S Series Heat Pump
3 Tons



Job Name: _____

Location: _____

Date: _____

Tag: _____

☐ Reference ☐ Approval ☐ Construction

Specifications

Performance¹

Cooling Capacity	36,000 Btu/h
Heating Capacity	40,000 Btu/h
EER2 (ducted/non-ducted)	10.5/10.7
SEER2 (ducted/non-ducted)	15.5/16.0
HSPF2 (ducted/non-ducted)	8.4/8.5

Technical Details

Compressor Type	DC Inverter x 1
Compressor RLA	40 A
Condenser Fan Qty	2
Condenser Fan Type	Propeller
Condenser Fan CFM	4,237
Factory Refrigerant Charge	7.69 lbs
Refrigerant Type	R-410A

Electrical

Voltage (V / Ø / Hz)	208-230 / 1 / 60
Minimum Circuit Ampacity (MCA)	25.4 A
Maximum Overcurrent Protection	30 A

Sound Levels

Sound Pressure Level, dB(A)	54
-----------------------------	----

Dimensions

Height (in.)	52 3/4
Width (in.)	37 3/8
Depth (in.)	14 5/8
Weight (lb.)	247

Piping

Connections, Liquid/Gas	3/8" x 5/8"
Total System length	492 ft.
ODU to furthest IDU	230 ft.
ODU above IDU	66 ft.
ODU below IDU	98 ft.

Features and Benefits

- High efficiency, twin rotary inverter compressor
- DC fan motor with 21" serrated-edge fan blade allows higher air movement at lower sound levels
- Wide range of operation from -4°F (-20°C) to 115°F (46°C)
- SEER performance up to 16.0
- HSPF performance up to 10.0
- Large coil and 2-stage sub cooling circuit increase heating and cooling performance
- Air cooled electrical box helps increase performance and reliability
- PID pressure control sensor enables more precise temperature control
- Night silent mode for quiet operation
- "888" test panel simplifies troubleshooting
- Optional QAWB46A Wind Baffle – Qty of 2 required.

Notes

1. Cooling and heating capacities are based on the following temperatures:
Cooling Indoor: 80°F DB, 67°F WB
Cooling Outdoor: 95°F DB
Heating Indoor: 70°F DB
Heating Outdoor: 47°F WB, 43°F WB
2. Refer to warranty documentation for complete warranty details.
3. Refer to installation manual for complete installation requirements.

MRV5
DC INVERTER


MRV-S
SERIES



Dimensional Drawings

MVHP036MV2AA

Unit: inch (mm)

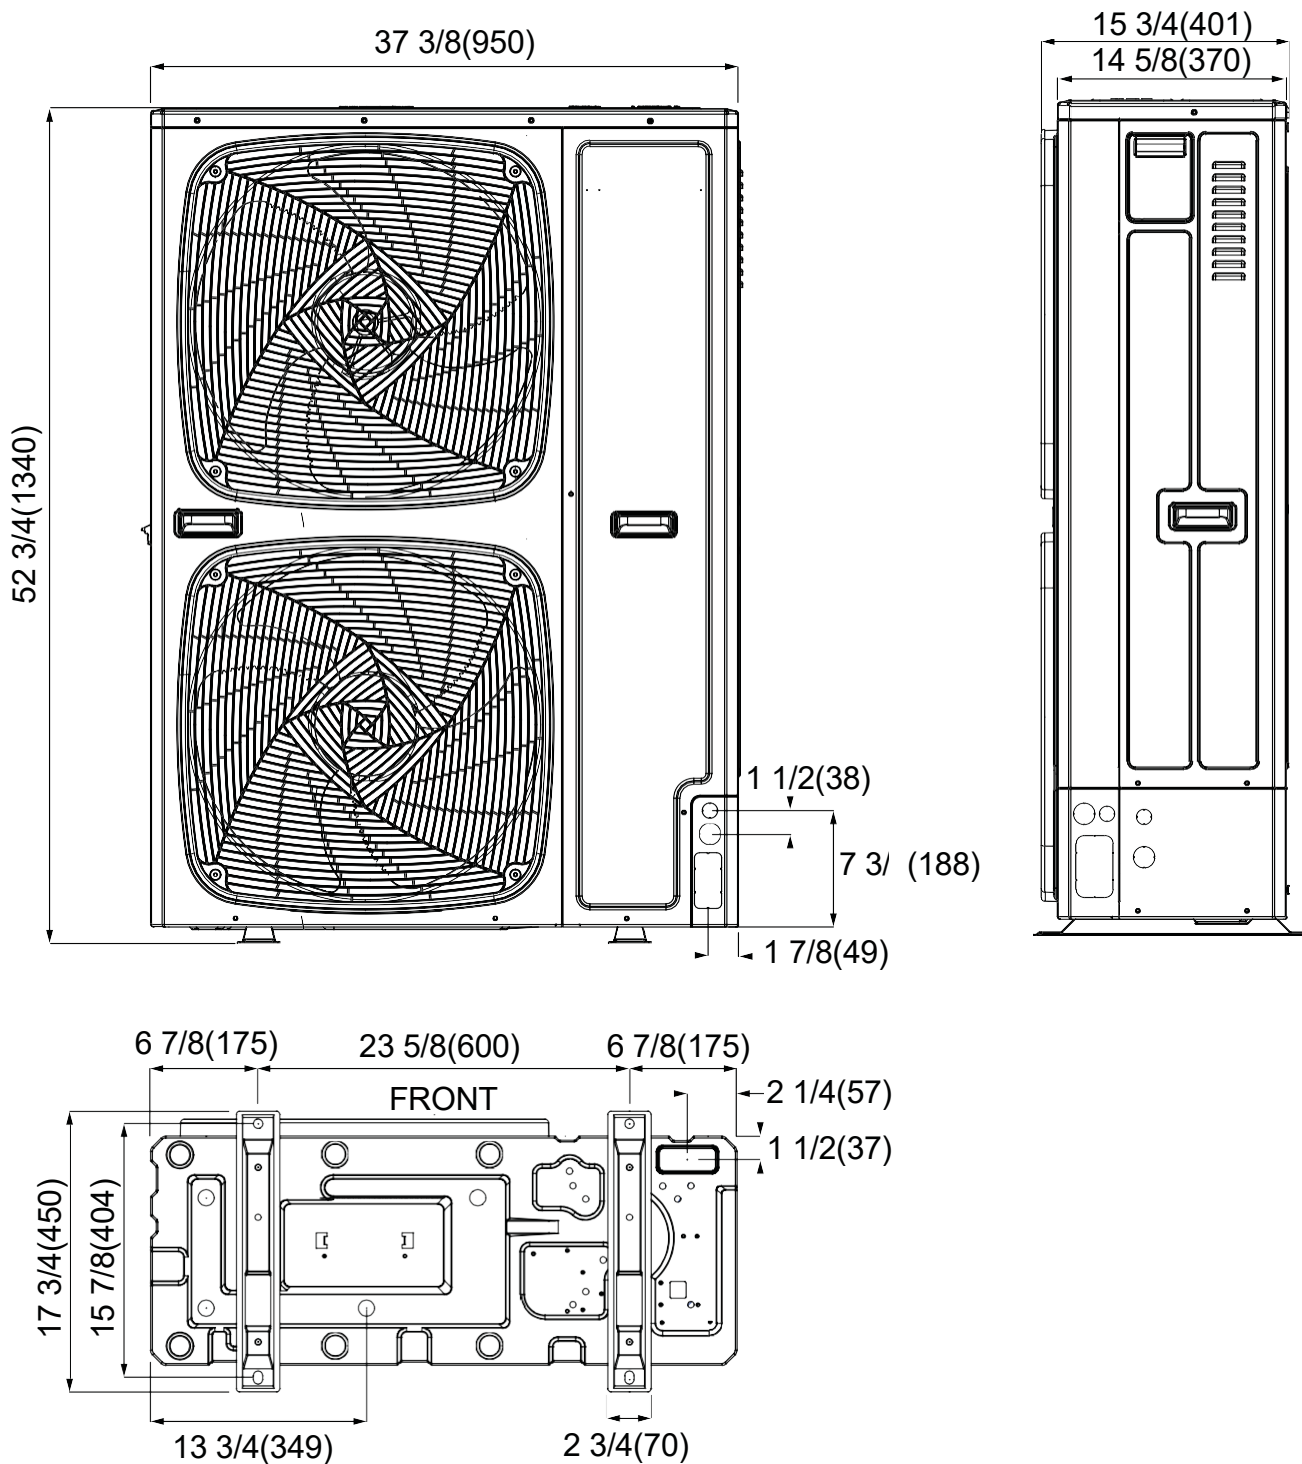

MVHP048MV2AA

MRV-S Series Heat Pump
4 Tons



Job Name: _____

Location: _____

Date: _____

Tag: _____

☐ Reference ☐ Approval ☐ Construction

Specifications

Performance¹

Cooling Capacity	48,000 Btu/h
Heating Capacity	54,000 Btu/h
EER2 (ducted/non-ducted)	9.5/10.0
SEER2 (ducted/non-ducted)	15.0/16.2
HSPF2 (ducted/non-ducted)	8.0/8.5

Electrical

Voltage (V / Ø / Hz)	208-230 / 1 / 60
Minimum Circuit Ampacity (MCA)	37.8 A
Maximum Overcurrent Protection	40 A

Technical Details

Compressor Type	DC Inverter x 1
Compressor RLA	40 A
Condenser Fan Qty	2
Condenser Fan Type	Propeller
Condenser Fan CFM	4,237
Factory Refrigerant Charge	8.81 lbs
Refrigerant Type	R-410A

Sound Levels

Sound Pressure Level, dB(A)	54
-----------------------------	----

Dimensions

Height (in.)	52 3/4
Width (in.)	37 3/8
Depth (in.)	14 5/8
Weight (lb.)	254

Piping

Connections, Liquid/Gas	3/8" x 5/8"
Total System length	492 ft.
ODU to furthest IDU	230 ft.
ODU above IDU	66 ft.
ODU below IDU	98 ft.

Features and Benefits

- High efficiency, twin rotary inverter compressor
- DC fan motor with 21" serrated-edge fan blade allows higher air movement at lower sound levels
- Wide range of operation from -4°F (-20°C) to 115°F (46°C)
- SEER performance up to 16.0
- HSPF performance up to 10.0
- Large coil and 2-stage sub cooling circuit increase heating and cooling performance
- Air cooled electrical box helps increase performance and reliability
- PID pressure control sensor enables more precise temperature control.
- Night silent mode for quiet operation
- "888" test panel simplifies troubleshooting
- Optional QAWB46A Wind Baffle – Qty of 2 required.

Notes

1. Cooling and heating capacities are based on the following temperatures:
Cooling Indoor: 80°F DB, 67°F WB
Cooling Outdoor: 95°F DB
Heating Indoor: 70°F DB
Heating Outdoor: 47°F WB, 43°F WB

1. Refer to warranty documentation for complete warranty details.

Refer to installation manual for complete installation requirements.

MRV5
DC INVERTER



MRV-S
SERIES



Dimensional Drawings

MVHP48MV2AA

Unit: inch (mm)

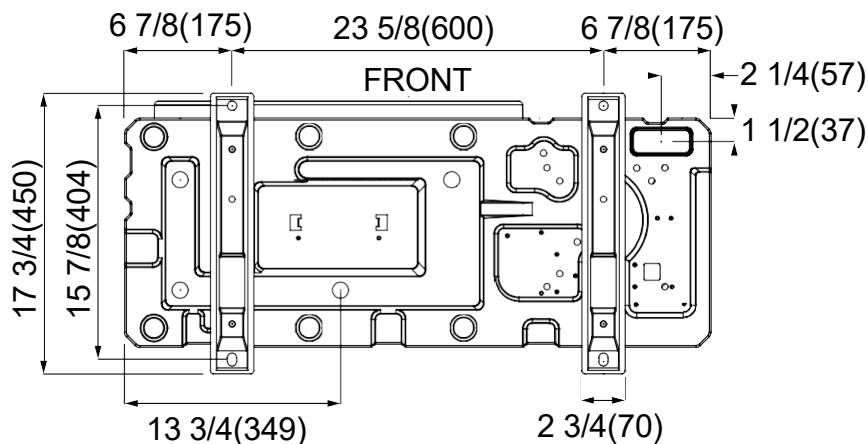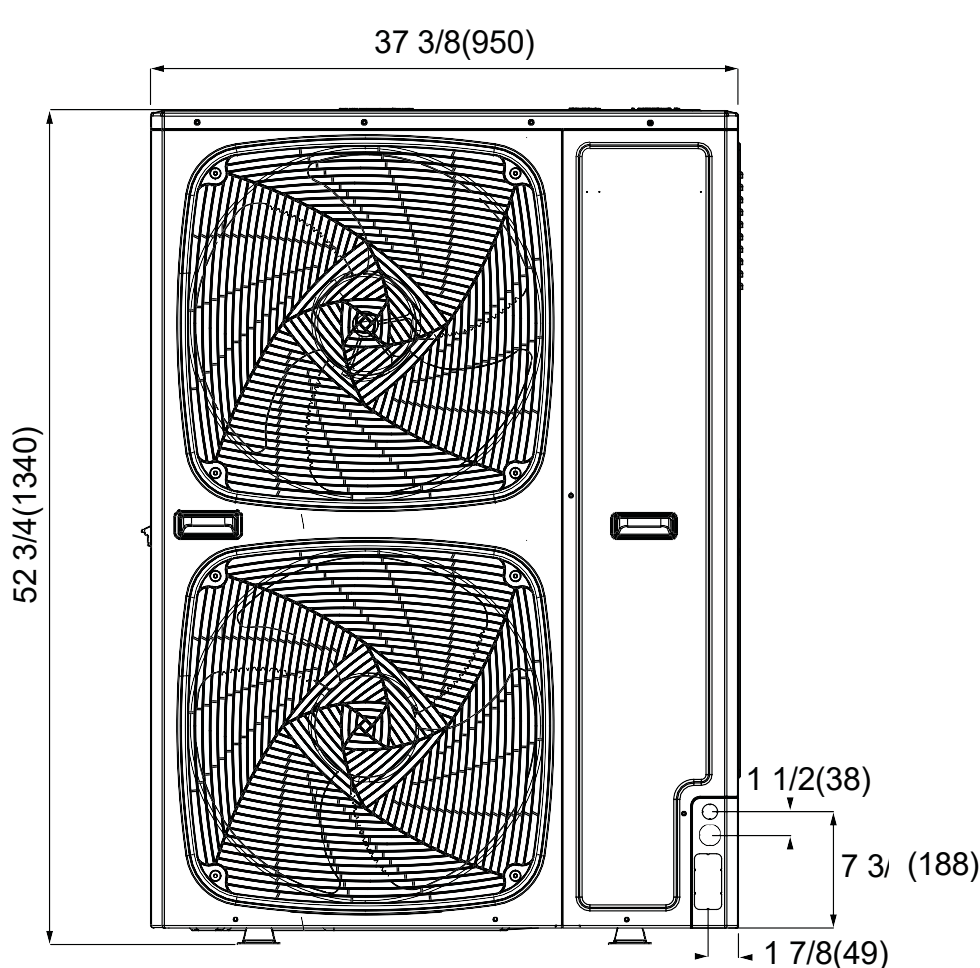

MVHP056MV2AA
MRV-S Series Heat Pump
5 Tons



Job Name: _____

Location: _____

Date: _____

Tag: _____

☐ Reference ☐ Approval ☐ Construction

Specifications

Performance¹

Cooling Capacity	56,000 Btu/h
Heating Capacity	59,000 Btu/h
EER2 (ducted/non-ducted)	9.0/9.4
SEER2 (ducted/non-ducted)	14.8/16.2
HSPF2 (ducted/non-ducted)	7.7/8.5

Technical Details

Compressor Type	DC Inverter x 1
Compressor RLA	40 A
Condenser Fan Qty	2
Condenser Fan Type	Propeller
Condenser Fan CFM	4,237
Factory Refrigerant Charge	8.81 lbs
Refrigerant Charge	R-410A

Electrical

Voltage (V / Ø / Hz)	208-230 / 1 / 60
Minimum Circuit Ampacity (MCA)	38.8 A
Maximum Overcurrent Protection	40 A

Sound Levels

Sound Pressure Level, dB(A)	54
-----------------------------	----

Dimensions

Height (in.)	52 3/4
Width (in.)	37 3/8
Depth (in.)	14 5/8
Weight (lb.)	254

Piping

Connections, Liquid/Gas	3/8" x 5/8"
Total System length	492 ft.
ODU to furthest IDU	230 ft.
ODU above IDU	66 ft.
ODU below IDU	98 ft.

Features and Benefits

- High efficiency, twin rotary inverter compressor
- DC fan motor with 21" serrated-edge fan blade allows higher air movement at lower sound levels
- Wide range of operation from -4°F (-20°C) to 115°F (46°C)
- SEER performance up to 16.0
- HSPF performance up to 10.0
- Large coil and 2-stage sub cooling circuit increase heating and cooling performance
- Air cooled electrical box helps increase performance and reliability
- PID pressure control sensor enables more precise temperature control
- Night silent mode for quiet operation
- "888" test panel simplifies troubleshooting
- Optional QAWB46A Wind Baffle – Qty of 2 required.

Notes

1. Cooling and heating capacities are based on the following temperatures:
Cooling Indoor: 80°F DB, 67°F WB
Cooling Outdoor: 95°F DB
Heating Indoor: 70°F DB
Heating Outdoor: 47°F WB, 43°F WB
2. Refer to warranty documentation for complete warranty details.
3. Refer to installation manual for complete installation requirements.

MRV5
DC INVERTER

MRV-S
SERIES



Dimensional Drawings

MVHP056MV2AA

Unit: inch (mm)

