

Mobile Refrigerated Cabinet

- Easily transport refrigeration with ergonomic handles, allowing for relocation within any commercial setting.
- 4 casters (2 locking) included to provide easy mobility.
- Vinyl bumper around the bottom for safety.



UCMR332-SS41A

Model	Description	Voltage/Hz/Phase	Shipping Weight
UCMR332-SS41A	Mobile Refrigerated Cabinet Solid Door, Right-Hand Hinge	220v / 60 Hz / 1ph	450 lbs

Specifications

Dimensions: 76" H x 31 1/2" W x 37 1/2" D

AISI 304 stainless steel interior and exterior with lock

Autodefrozt

CFC-free high density polyurethane insulated cabinet

Environmentally friendly R452A refrigerant

Epoxy coated, sealed evaporator eliminates potential corrosion

Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 6-20P

High efficiency compressor, bottom mount

High efficiency evaporator coil & condenser

Includes 12 sets of pan slides

NSF/ANSI Standard 7 compliant

Temperature range: 34°F to 46°F


Toggle style on/off switch with guard

Volume of 11.65 cu ft.




Product Specifications • Mobile Refrigerated Cabinet


Front (Open)

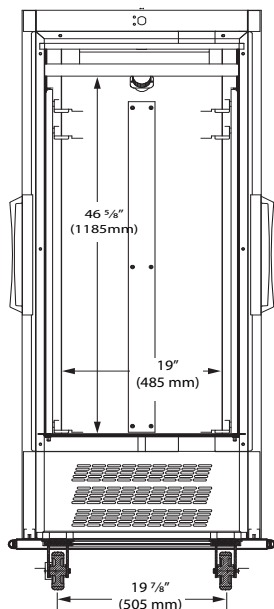


Front (Closed)

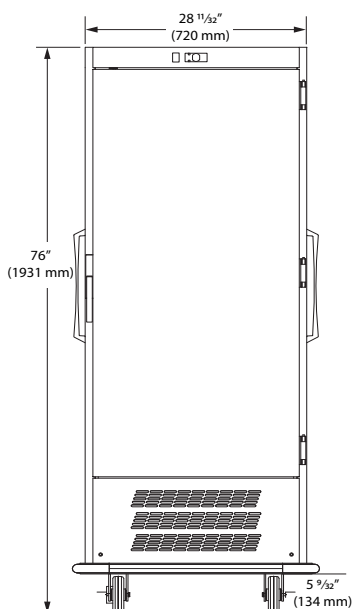


Back

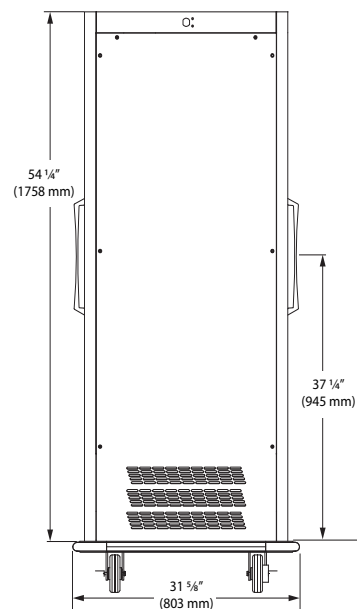

Side

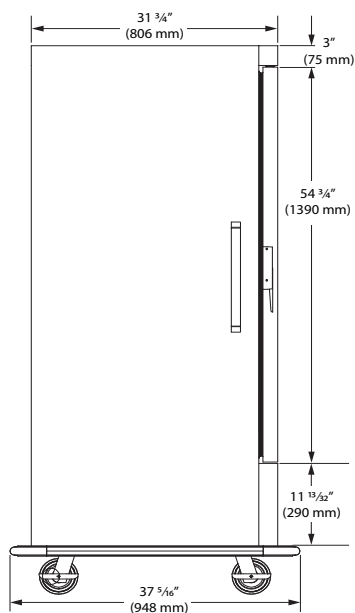

Side (Interior)

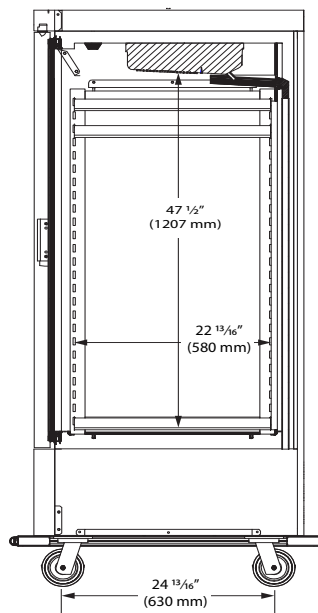

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

