

Proofer Retarder Combination, Reach-In

- With both retarding and proofing capabilities, optimize space and enhance efficiency in commercial baking operations.
- Comfortably fits 15 3/4" x 23 5/8" pans (not included).
- 4 casters (2 locking) included to provide easy mobility.
- LED interior lighting.
- Utilizes up to 4 different recipe settings.



UCPR322-SG41A

Model	Description	Voltage/Hz/Phase	Shipping Weight
UCPR322-SG41A	Proofer Retarder Combination Glass Door, Right-Hand Hinge	220v / 60 Hz / 1ph	243 lbs

Specifications

Dimensions: 83 1/2" H x 24 3/8" W x 31 1/2" D

AISI 304 stainless steel interior and exterior with lock

Autodefrost

CFC-free high density polyurethane insulated cabinet

Electronic digital temperature control with alarms accurately tracks temperature, humidity & time

Environmentally friendly R290 refrigerant

Epoxy coated, sealed evaporator eliminates potential corrosion

Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 6-20P

High efficiency compressor, top mount

High efficiency evaporator coil & condenser

Includes 15 pairs of shelf guides

NSF/ANSI Standard 7 compliant


Temperature range: 16°F to 86°F

Volume of 16.6 cu ft.




Product Specifications • Proofer Retarder Combination, Reach-In


Front

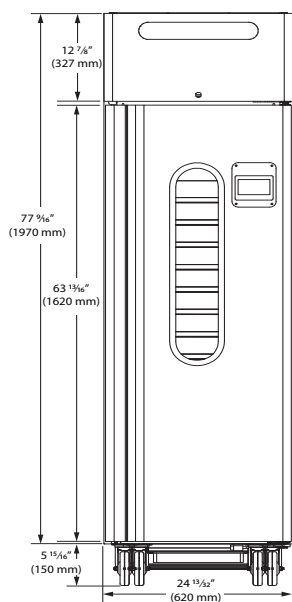


Side

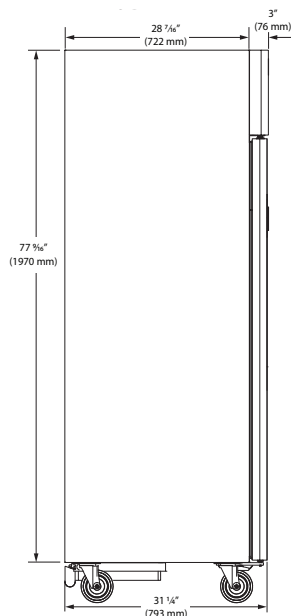

Top

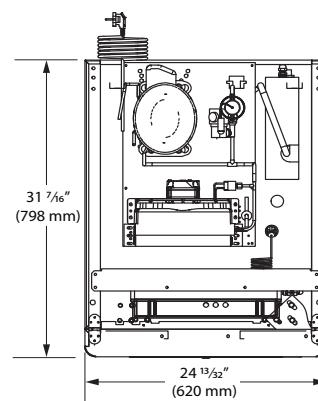

Water Connection

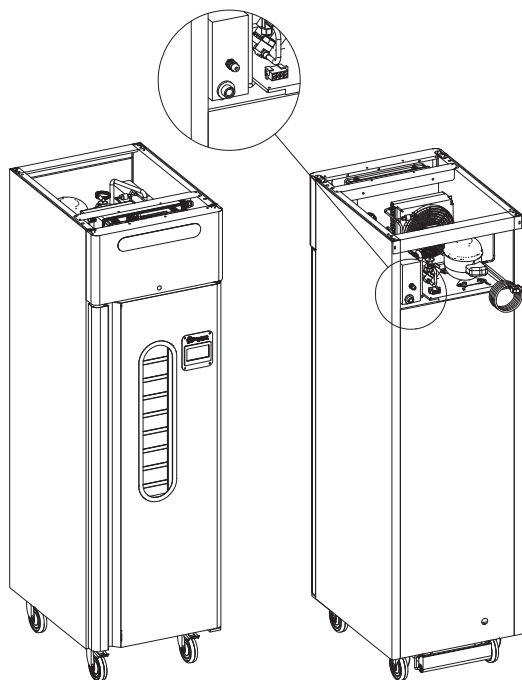

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

