

MVHR192ME2CA

MRV 5 Series Heat Recovery
16 Tons



Job Name: _____
 Location: _____
 Date: _____
 Tag: _____

Reference Approval Construction

Specifications

Performance¹

Cooling Capacity	184,000 Btu/h
Heating Capacity	206,000 Btu/h
EER (ducted/non-ducted)	11.2/11.4
IEER (ducted/non-ducted)	19.7/20.4
SCHE (ducted/non-ducted)	24.3/26.6
COP 47F (ducted/non-ducted)	3.30/3.40

Technical Details

Compressor Type	DC Inverter 1+1
Compressor RLA	22.8 + 22.8
Condenser Fan Qty	2+2
Condenser Fan Type	Propeller
Condenser Fan CFM	10,500 + 10,500
Factory Refrigerant Charge	47.18 + 47.18 lb

Electrical

Voltage (V / Ø / Hz)	208-230 / 3 / 60
Minimum Circuit Ampacity (MCA)	34.5A + 34.5A
Maximum Overcurrent Protection	40A + 40A

Sound Levels²

Sound Power Level, dB(A)	81 + 81
--------------------------	---------

Piping

Total System length	3280 ft.
ODU to furthest IDU	722 ft.
ODU above IDU	295 ft.
ODU below IDU	361 ft.

Features and Benefits

- Ability to simultaneously heat and cool from different indoor units, maximizing efficiency and comfort
- Optimized, intelligent control with all DC inverter EVI compressor technology achieves high efficiency performance with high reliability
- Wide range of operation from -13°F (-25°C) to 122°F (50°C)
- IEER performance up to 24.5
- SCHE performance up to 28.0
- COP performance up to 3.6
- Delivers 80% of rated heating capacity at 5°F (-15°C)
- Four-sided heat exchanger reduces chassis footprint
- Hinged electrical box design for ease of access to system components
- Factory standard black fin anti corrosion coating
- Nighttime quiet operation reduces sound levels by 10 dB(A)
- Automatic oil balancing eliminates the need for oil balancing piping
- 10 year limited parts and compressor warranty²

Notes

1. Cooling and heating capacities are based on the following temperatures:
 Cooling Indoor: 80°F DB, 67°F WB
 Cooling Outdoor: 95°F DB
 Heating Indoor: 70°F DB
 Heating Outdoor: 47°F WB, 43°F WB
2. Refer to warranty documentation for complete warranty details.
3. Refer to installation manual for complete installation requirements.

MRV5
DC INVERTER

MRV-S
SERIES



MVHR192ME2CA


 MRV 5 Series Heat Recovery
 16 Tons

	Module 1 MVHR096ME2CA	Module 2 MVHR096ME2CA
Technical Details		
Compressor Type	DC Inverter x 1	DC Inverter x 1
Compressor RLA	22.8 A	22.8 A
Condenser Fan Qty	2	2
Condenser Fan Type	Propeller	Propeller
Condenser Fan CFM	10,500	10,500
Factory Refrigerant Charge	47.18 lbs.	47.18 lbs.
Electrical		
Voltage (V / Ø / Hz)	208-230 / 3 / 60	208-230 / 3 / 60
Minimum Circuit Ampacity (MCA)	34.5 A	34.5 A
Maximum Overcurrent Protection	40 A	40 A
Sound Levels²		
Sound Power Level, dB(A)	81	81
Dimensions		
Height (in.)	66 1/2	66 1/2
Width (in.)	55 1/2	55 1/2
Depth (in.)	29 1/2	29 1/2
Weight (lb.)	750	750
Piping		
Connections, Liquid/Gas	5/8" x 1 1/8"	5/8" x 1 1/8"

Dimensional Drawings

MVHR096ME2CA

Unit: inch (mm)

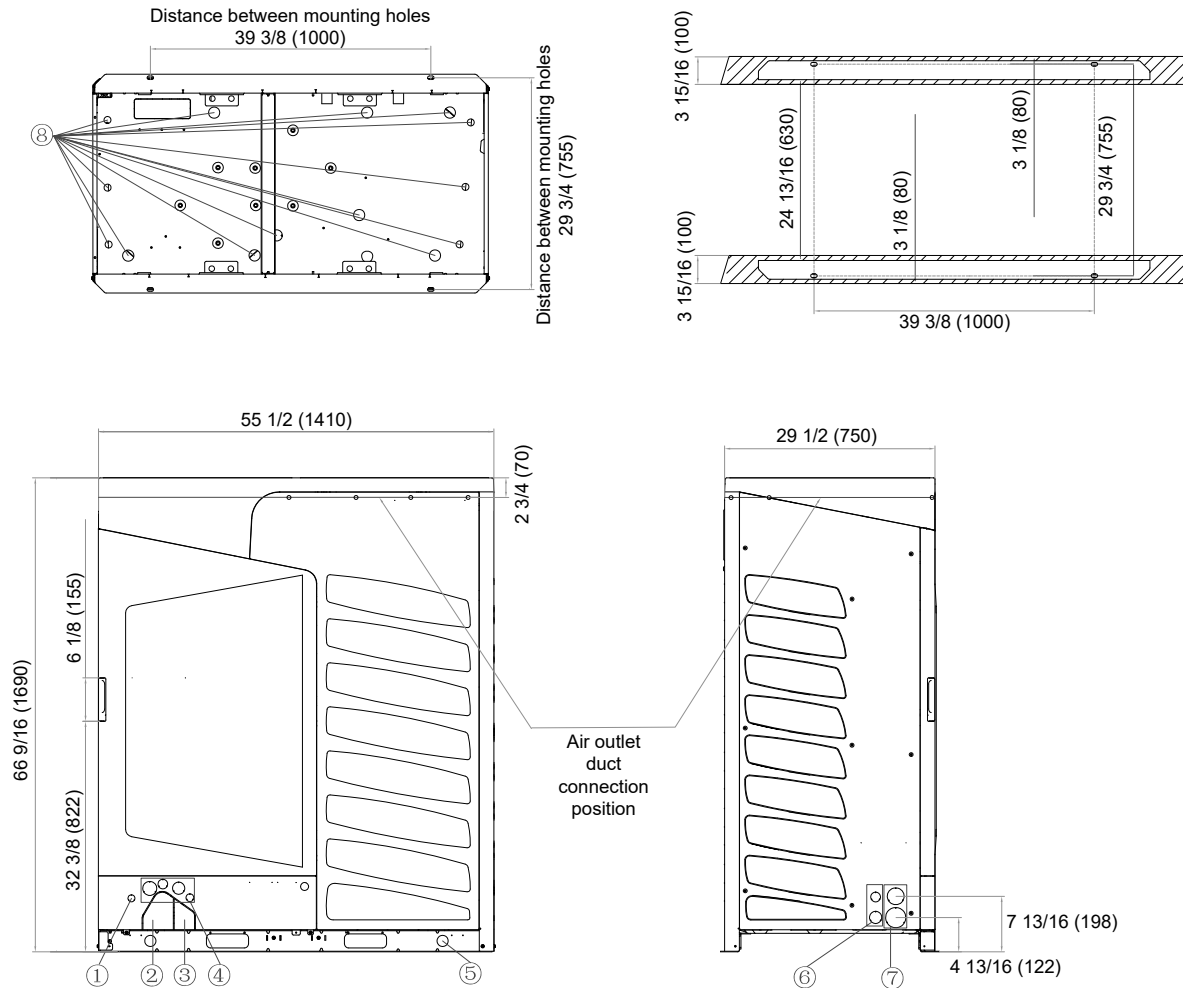

No.	Name	Remark
①	Signal line opening (1)	Use rubber grommet for protection
②	Pipe outlet for 2-pipe system	
③	Pipe outlet for 3-pipe system	
④	Power supply opening (2 / 1-2/5)	According to the wire diameter size to choose the appropriate line opening, and using the line sheath in the unit's attachment for protection.
⑤	Hoisting opening (1-3/5)	
⑥	Power supply of signal line opening (1-2/5 / 1-3/4)	
⑦	Refrigerant pipe outlet (2-2/5 / 2-4/5)	
⑧	Drain opening	