XOU15WGS _

UNDERCOUNTER WINE COOLER
SINGLE ZONE





Zero clearance hinges for a flush installation

Extending steel racks cushion your bottles

Intuitive digital touch contols

Secure door lock

15” UNDERCOUNTER WINE COOLER

Keep 34 bottles close at hand and ready to serve at 41° to 64°F.

This elegant, efficient wine storage and serving center is the perfect choice for convenient entertaining. At only 15” wide and designed to install flush with your cabinetry, this quiet and efficient wine cooler will prove to be the ideal choice for entertaining or just relaxing.

When it is all about the wine - it is all about XO.


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU


XOU15WGS_*

15” SINGLE ZONE WINE COOLER


*Specify R for right hand hinge - or - L for left hand hinge

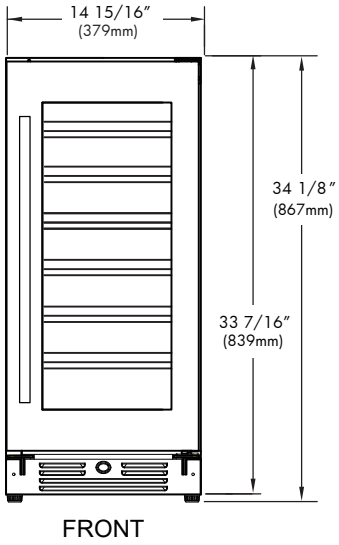

FRONT

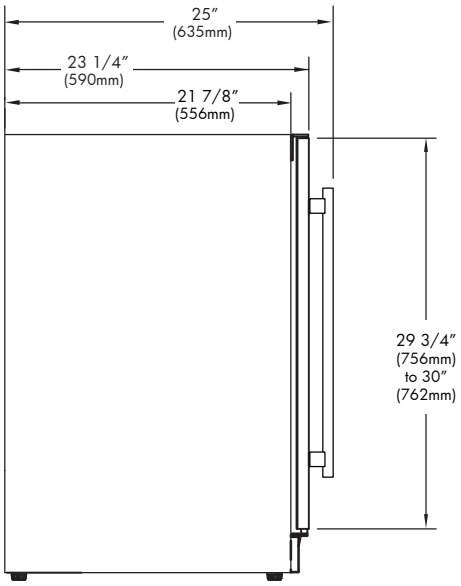

SIDE

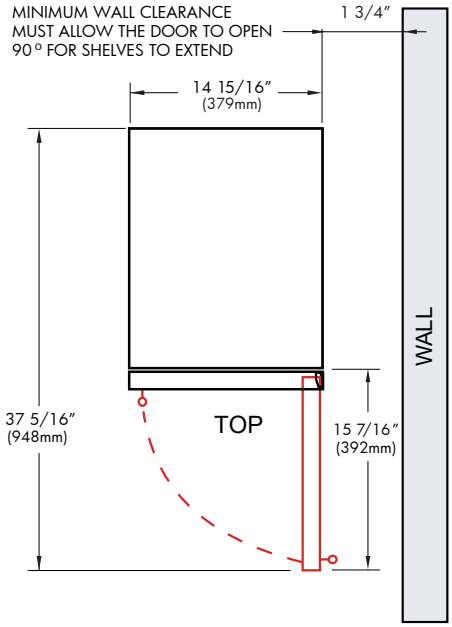

FEATURES

CAPACITY

Extending wire bottle racks hold:
(30) 750ml bottles 41° To 64° F
Storage for (4) additional bottles at the bottom

FEATURES

- Zero clearance hinges for flush integration*
- Secure door lock
- Non-reversible door - specify right or left hinge
- Library quiet 39 dBA operation
- Elegant tri-color interior illumination
- Intuitive digital touch controls
- 6 1/2’ Power Cord with low profile 90°flat plug
- Low E Glass blocks harmful UV light
- Alarm Functions
- Energy Saver and Sabbath Mode

* Note: zero clearance hinges are visible just above and below the door panel

SPECIFICATIONS

ELECTRICAL	120V 60HZ 4.35 AMP*	
DIMENSIONS	H	34 1/8”
	W	14 15/16”
	D	23 1/4”
ROUGH IN	H	34 1/4“ min
	W	15”
	D	24”
REFRIGERANT	R600A	


INCLUDES TWO DIFFERENT STYLE HANDLES


C US

the next level in luxury appliances

xoappliance.com | 800.966.8300

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068


ROUGH IN DIMENSIONS

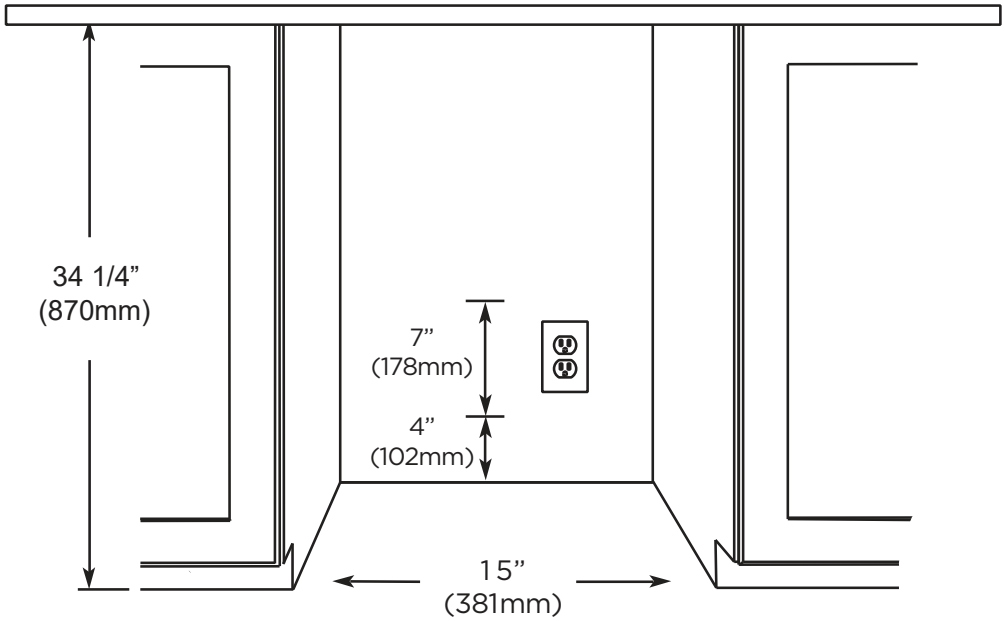


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE



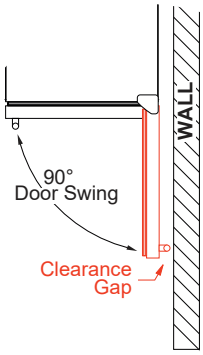

WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE 1-3/4” CLEARANCE GAP FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE SHELVES