XOU24BCSF

24” UNDERCOUNTER BEVERAGE CENTER

LIFESTYLE REGRIGERATION





XOU24BCSF

- Glass Shelves Fully Extend While Loaded
- Holds Up To 145 (12oz) Cans
- Shelves Adjust To 15 Different Positions
- Tri-Color LED Interior Lighting

24” UNDERCOUNTER BEVERAGE CENTER

Easy to Store – Easy to Find. Your XO undercounter Beverage Center is the quick, convenient way to keep all your favorite beverages close at hand. The clear glass shelves fully extend while loaded to let you see and find everything at a glance.

And because they easily adjust to 15 different positions, you can quickly configure the beverage center into your beverage center.


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XOU24BCSF

24” UNDERCOUNTER BEVERAGE CENTER

*Specify R for right hand hinge - or - L for left hand hinge

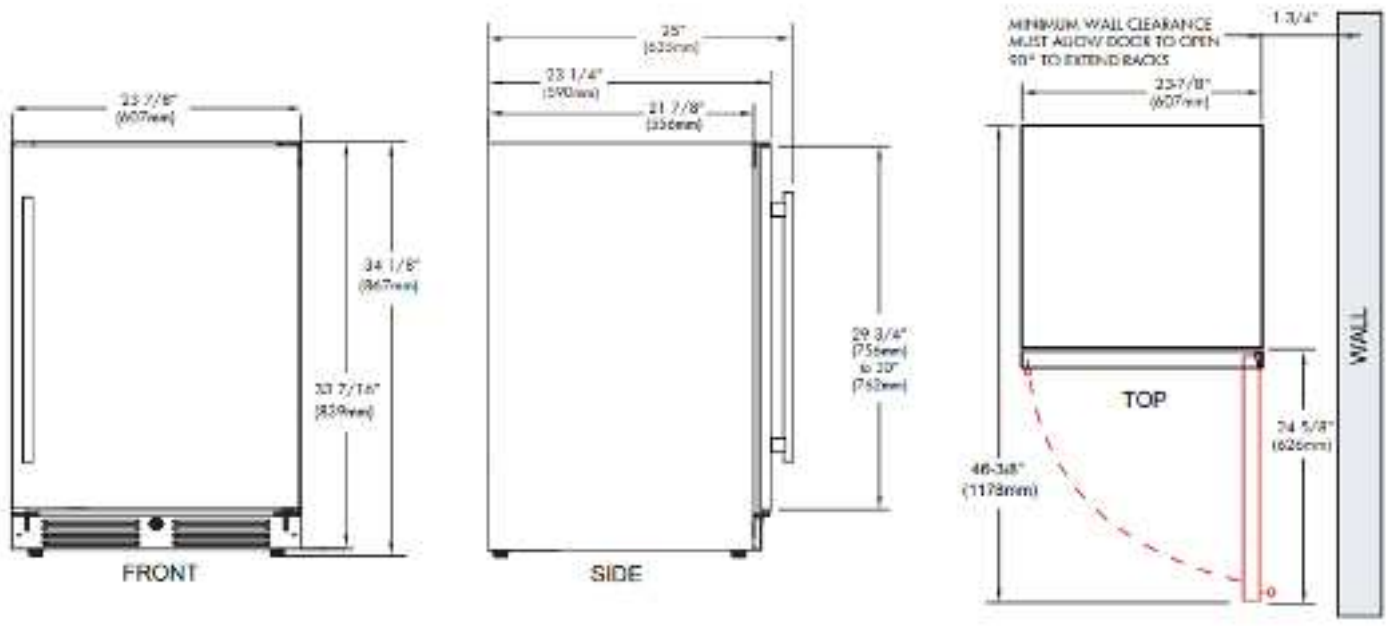

FEATURES

CAPACITY

Full extension clear glass shelves hold 145 (12oz) cans at 34° to 50° F

FEATURES

- Glass shelves extend fully while loaded to reveal contents
- Secure door lock
- Tri-color LED interior lighting
- Shelves quickly adjust to 15 different positions
- Intuitive digital temp control from 34° to 50° F
- Holds up to 145 (12oz) cans
- Flush installation design
- Energy-efficient Low-E Glass
- Removable Wine Bottle Cradle included
- X-Active circulation removes odors and circulates air
- Quiet Operation 39 dBA
- ENERGY STAR Certified Residential
- Designed for residential or commercial settings

Note: zero clearance hinges are visible just above and below the door panel.

SPECIFICATIONS

ELECTRICAL	120V 60HZ 4.35 AMP*
DIMENSIONS	H 34 1/8” X W 23 7/8” X D 23 1/4”
ROUGH IN	H 34 1/4“ min X W 24” X D 24”
REFRIGERANT	R600A
WEIGHT	149 lbs



Two Different Style Handles Included



Includes Removable 6 Bottle Wine Rack

ENERGY STAR

XO the next level in luxury appliances


xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU24BCSF


24” UNDERCOUNTER BEVERAGE CENTER

ROUGH IN DIMENSIONS

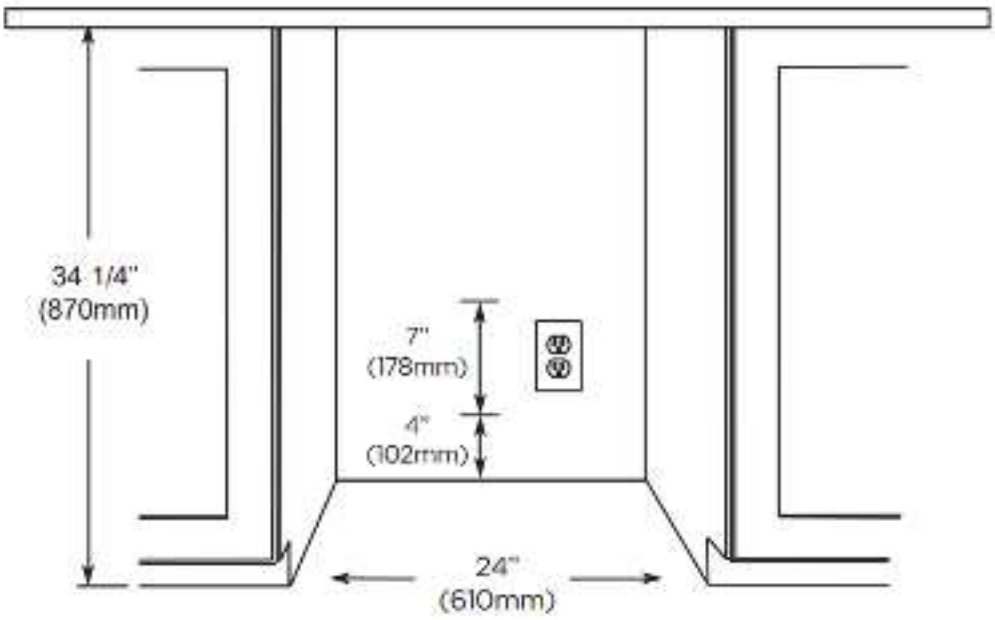

ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



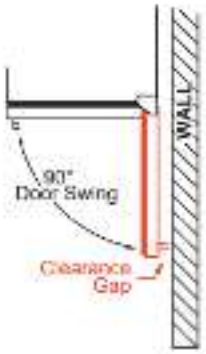

WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE 1-3/4" CLEARANCE GAP FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE



IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE SHELVES.

CONSULT THE MANUAL FOR INSTRUCTIONS ON CHANGING THE DOOR STOP SETTING.