



XOU24ORS

24" OUTDOOR REFRIGERATOR

LIFESTYLE REFRIGERATION



XOU24ORS

- Zero Clearance Hinges Flush Integration
- Secure Door Lock
- Non- Reversible Door
- Library Quiet 39 DbA Operation


24" UNDERCOUNTER OUTDOOR REFRIGERATOR

Store up to 145 (12oz) cans at a frosty 34° to 50° F and still find just what your are looking for. The clear glass shelves slide out while fully loaded making it easier to store and locate contents at a glance. No more fumbling around or emptying the unit to find what you want.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

*Specify **R** for right hand hinge - or - **L** for left hand hinge

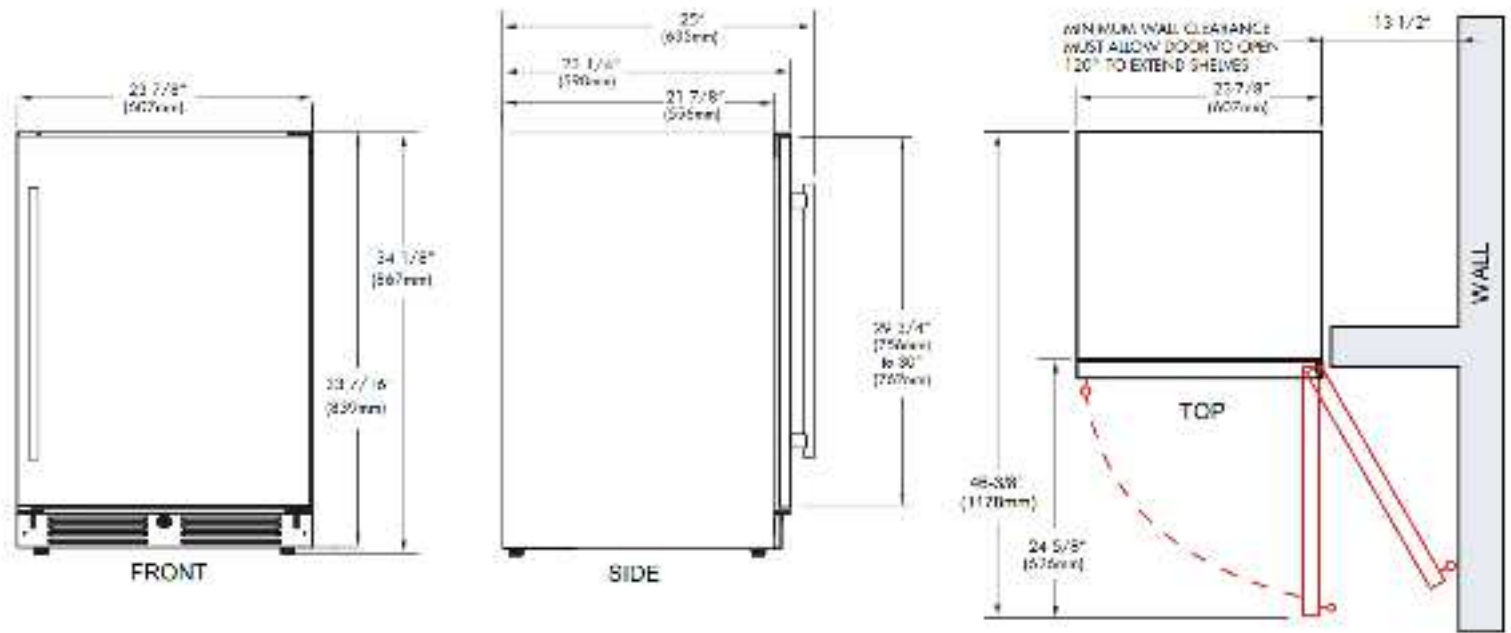

FEATURES

CAPACITY

Full extension clear glass shelves hold 145 (12oz) cans at 34° to 50° F

FEATURES

- Glass shelves extend while loaded
- Holds up to 145 (12oz) cans
- Shelves adjust to 6 different positions
- Tri-color LED interior lighting
- Secure door lock keeps uninvited guests out
- Quiet Operation 39 dBA
- Intuitive digital temp control from 34° to 50° F
- Flush installation design for under counter
- Stainless Steel door
- X-Active eliminates odors, keeps air moving
- ENERGY STAR Certified Residential
- Designed for residential or commercial settings

Note: zero clearance hinges are visible just above and below the door pane

SPECIFICATIONS

ELECTRICAL 120V 60HZ 4.35 AMP*

DIMENSIONS H 34 1/8"
W 23 7/8"
D 23 1/4"

ROUGH IN H 34 1/4" min
W 24"
D 24"

REFRIGERANT R600A



Two Different Style Handles Included


NEW



Optional Modern Design Flat Handle



ROUGH-IN DIMENSIONS

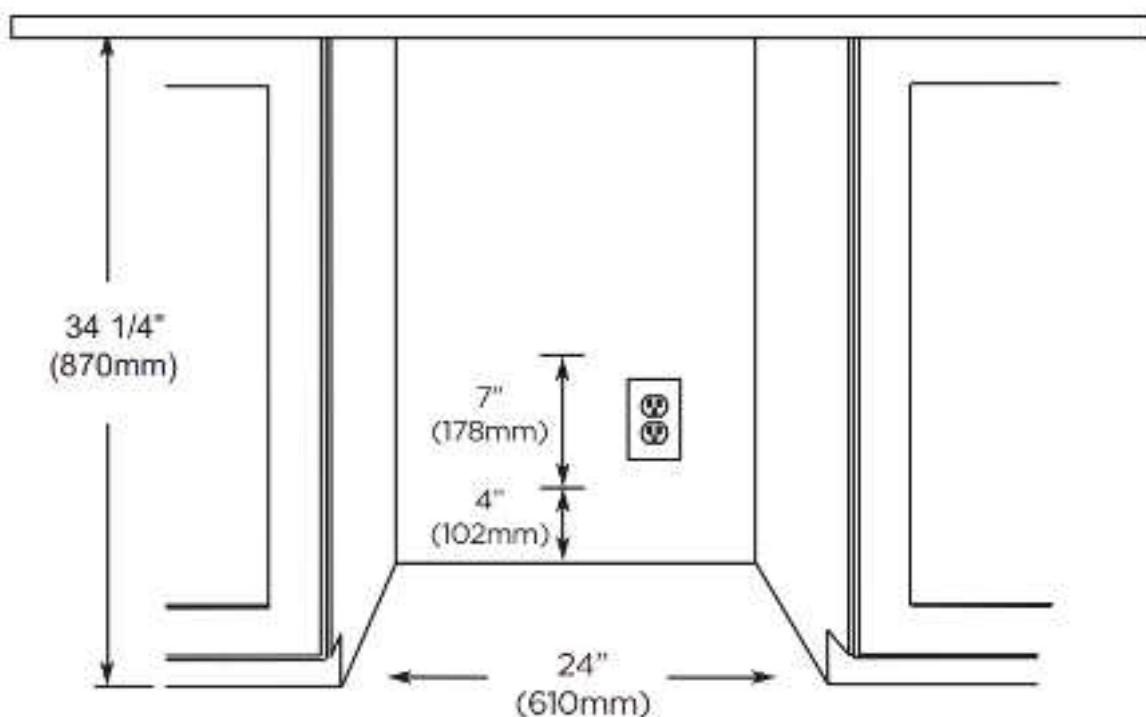

All XO undercounter units arrive pre-wired with low profile plugs for easy installation




Need more space - Cut into an adjoining cabinet to reach an outlet there



When installing with the hinge side next to a wall leave 13 1/2" clearance gap for Cabinet handles

Door must open a minimum of a 110°

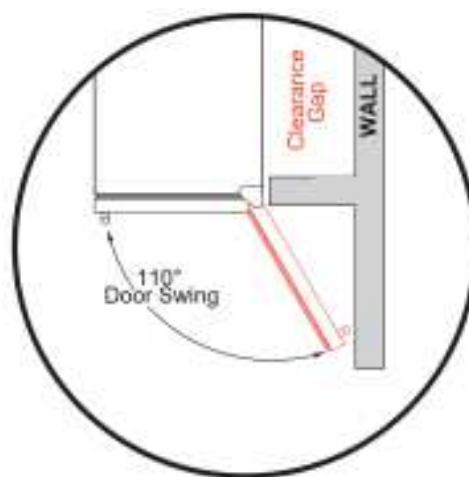

If the door cannot open fully
You cannot extend the shelves.
Consult the manual for Instructions
on changing the door stop setting.