



Professional dishwasher

DWC6432FIXXLU

Professional

Noise level (max): 42 dB(A)

Number of place settings: 16 pcs

Number of racks: 3

Size: XXL

Turbo Combi Drying™ ensures dry dishes with fan assisted evacuation of moisture in combination with Auto Door Opening

Installation: Panel ready

Construction

- Installation: Panel ready
- Tub: Acid proof steel
- Plug type: USA NEMA 14-30
- Adjustable base: Vertical
- Max Height adjustment: 2 1/16 "
- From front adjustable rear foot: Yes
- Size: XXL
- Number of racks: 3

Standard electrical connection

- Frequency: 60 Hz
- Connected load: 2850 W
- Fuse: 30 A
- Voltage (V): 2N 120/208-240 V
- Length of electrical cord: 71 7/16 "
- Heater power: 2750 W
- Supply voltage 2: 120 V
- Number of phases: 2

Water connection/drainage

- Water connection: Hot and cold
- Required inlet water pressure psi: 1
- Automatic water-softener for better washing performance: Yes
- Aqua Safe™: Anti Block™ - Self cleaning drain pump, Light and sound alarm, Maximum time for water intake, Extra durable PEX inlet hose, Stand-by water protection - Leakage detection when machine is off, Aqua Level™ Sensor - Ensures an optimized water level, Aqua Detect™ - Instant recognition of any leakage in the motor compartment, Detection of water leakage on the bottom plate, Waterproof bottom plate, Extra durable stainless steel container, Sealing points outside container
- Length inlet hose: 64 3/16 "
- Length outlet hose: 90 9/16 "
- Max. temperature of inflow water: 140 °F

Controls

- Control: TouchControl
- Delayed start: Continuous
- Delayed start: Possible to delay up to 24 hours
- Create own program: No
- Remaining time indication: Yes
- Language settings: Chinese simplified, Chinese traditional, Ukrainian, Swedish, Serbian, Slovenian, Slovak, Russian, Portuguese, Polish, Norwegian, Dutch, Latvian, Lithuanian, Japanese, Italian, Croatian, French, Finnish, Estonian, Spanish, English, German, Danish, Czech

Drying unit

- Hidden heating element: Yes
- Drying system: Turbo Combi Drying™ ensures dry dishes with fan assisted evacuation of moisture in combination with Auto Door Opening

Logistic information

- Width: 23 15/16 "
- Height: 33 13/16 "

- Depth: 22 5/16 "
- Packaging width: 25 3/16 "
- Packaging height: 36 5/8 "
- Packaging depth: 27 3/8 "
- Min. niche height: 33 7/8 "
- Min. niche width: 24 "
- Depth (incl. wall spacing): 22 3/8 "
- Net weight: 98.3 lb
- Gross weight: 106.7 lb
- Adjustable kick plate: 30-94/0
- Maximum product height: 35 7/8 "
- Product code: 744963

Features

- Number of program: 10
- Number of different wash temperatures: 4
- Wash end indication: Displayed with sound and light
- Salt refill indicator: Notification in display
- Indication of low level of rinse-aid: Notification in display
- Interior light: Yes, 2 LED lights
- Installation: Velcro strips for easy mounting and adjustment of the separate custom door, Multi fit outlet hose, Integrated anti-siphon - Prevents spontaneous in- and outlet of water and simplifies elevated installation, Trim kit, Steam protection strip
- Aqua Safe™ system: Yes
- Child safety: Child lock and Sani lock
- Upper basket: Perfect ergonomics with easy sliding telescopic rails, Standard knife stand, Fixed glass support, Fixed pin rows, Foldable wine shelves to right, Foldable wine shelves to left, Small distance between the basket threads - makes loading easy and prevents small items to fall through
- Middle basket: Without middle basket
- Lower rack: Small distance between the basket threads - makes loading easy and prevents small items to fall through., Handle, Foldable/divisible rear pin row, Cutlery basket

Performance

- The shortest program time: Quick 17 min
- The shortest Sani program: Sani Quick 29 min
- Number of place settings: 16 pcs
- Number of water jet levels: 3
- 8 Steel™ - Vital parts of the dishwasher made in stainless steel: Yes
- Water consumption: 3.3 gal
- Noise level (max): 42 dB(A)
- Final rinse temp for 4 minutes: 185 °F

Energy label information

- Estimated yearly energy consumption: 250 kWh
- Estimated annual water consumption: 710.1 gal
- Power consumption in standby mode: 0.5 W
- Duration of standard programme: 240 min

Programs


- Programs: SANI Quick, SANI, Self cleaning, Crystal glass, Universal programme, Rinse and hold programme, Standard, Intensive program, Quick wash, Sanitize
- Options and modes: Enable/disable automatic door opening, Push to open - Handle-free door opening, Light sabbath mode
- Upper rack type: Professional Premium
- Lower rack type: Professional Premium

Connection options



- Automatic dosing system: Yes, external

EAN



- EAN code: 3838782958854

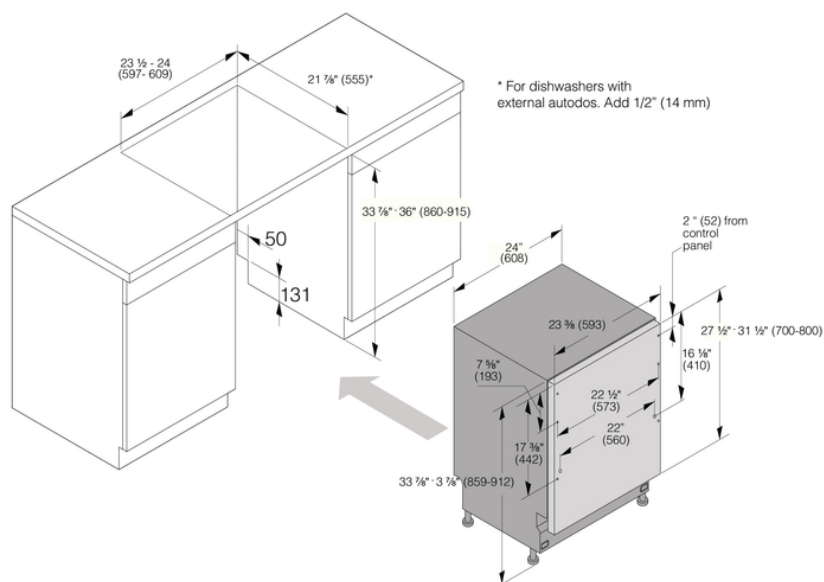

Door trajectories

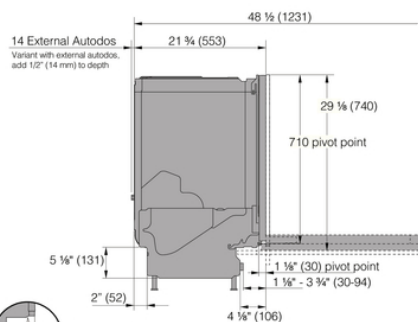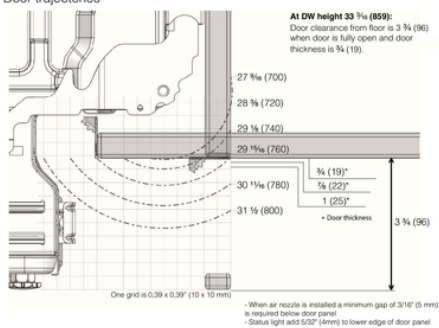

Single Inlet Variant

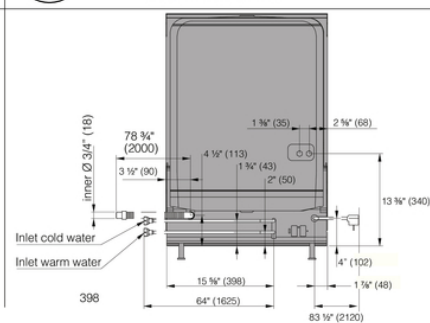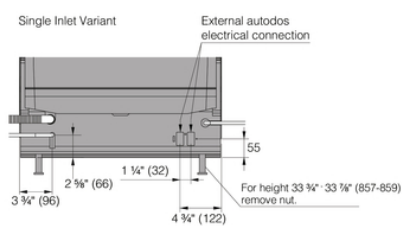

TMD DW60 C FI XXL