




GE APPLIANCES

VRF Low ESP Slim Duct

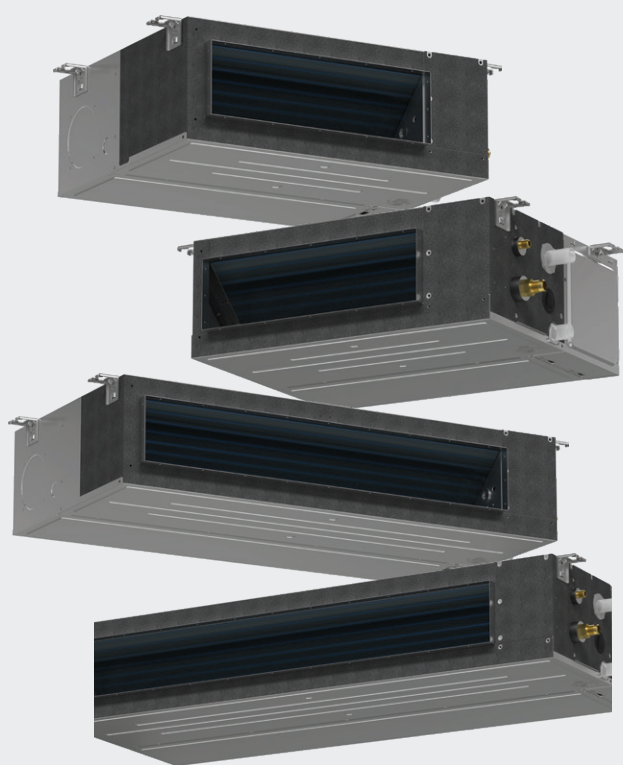

R32 Leak Detector

Standard integrated R32 leak detector for enhanced safety and compliance.

Quiet Operation

Low sound levels.

Low Profile Design

Low-profile height design is ideal for limited ceiling space.

IAQ Enhancement

Integrated drain pump and Ag+ silver ion filter for condensate removal and improved indoor air quality.

Airflow Control & Configurable Air Return Options

Maintains stable air volume. Optional air return configurations: Bottom or rear air return for flexible duct design. A single model supports both fresh air and return air functions.

Anti-Cold Air Startup

Anti-cold air function prevents cold drafts during heating startup, improving occupant comfort.


Brought to you by



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

VRF Low ESP Slim Duct Specifications

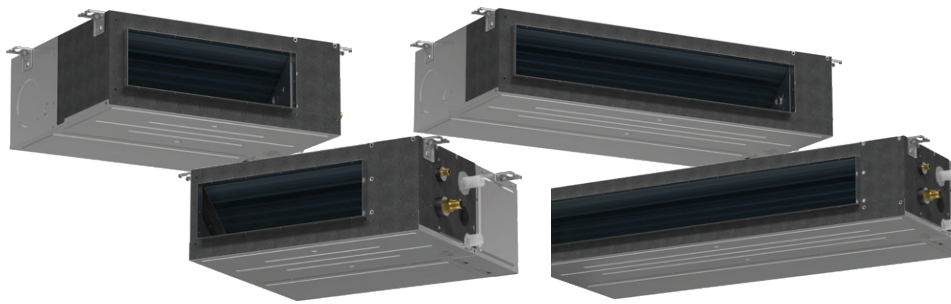

MWAD***NE2AA Low ESP Slim Duct

Model	Sound (dBA)	Dimensions (in.)	Approx. Unit Weight (lbs.)	AHRI Rated Capacity BTU/hr
MWAD007NE2AA	49/47/46/44/43/42/41	9-11/16 x 33-1/16 x 33-1/16	52.90	7,600
MWAD009NE2AA	49/47/46/44/43/42/41	9-11/16 x 33-1/16 x 33-1/16	52.90	9,000
MWAD012NE2AA	49/47/46/44/43/42/41	9-11/16 x 33-1/16 x 33-1/16	52.90	12,000
MWAD015NE2AA	49/47/46/44/43/42/41	9-11/16 x 33-1/16 x 33-1/16	52.90	15,000
MWAD018NE2AA	54/51/50/49/47/46/45	9-11/16 x 33-1/16 x 33-1/16	37.80	18,000
MWAD024NE2AA	56/54/51/48/46/45/44	7-13/16 x 43-5/16 x 17-11/16	44.09	24,000