




GE APPLIANCES

VRF Highwall

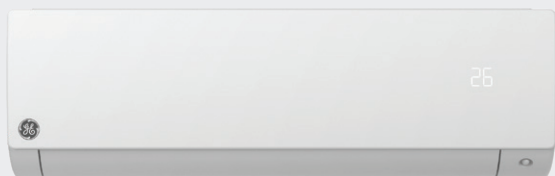

R32 Leak Detector

Standard integrated R32 leak detector for enhanced safety and compliance.

Occupancy Sensor

Equipped with a built-in occupancy sensor for automatic comfort.

Anti-Cold Air Startup

Anti-cold air function prevents cold drafts during heating startup, improving occupant comfort.

Temperature Control

Precise temperature control maintains indoor settings within $\pm 1^{\circ}\text{F}$ for consistent comfort.

IAQ Enhancement


Integrated drain pump and Ag+ silver ion filter for condensate removal and improved indoor air quality.

Brought to you by



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

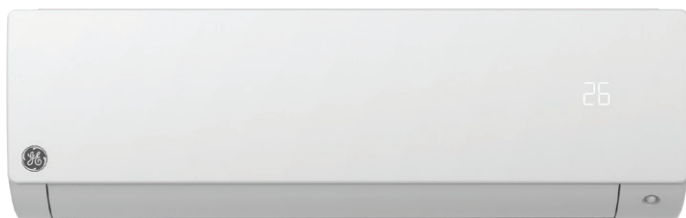

MWAW***NE2AA Highwalls

Model	Sound (dBA)	Dimensions (in.)	Approx. Unit Weight (lbs.)	AHRI Rated Capacity BTU/hr
MWAW005NE2AA	49.5/47/45/43/41/40/39.5	11-5/8' x 32 x 8	21.6	5,100
MWAW007NE2AA	50.5/48.5/46.5/44.5/42/41/40.5	11-5/8' x 32 x 8	21.6	7,500
MWAW009NE2AA	50.5/48.5/46.5/44.5/42/41/40.5	11-5/8 x 32 x 11-5/8	21.6	7,500
MWAW012NE2AA	54/51.5/49.5/47/44.5/43/42	11-5/8 x 32 x 11-5/8	21.6	12,300
MWAW015NE2AA	51.5/49.5/47.5/45/43/42/41.5	12-5/8 x 38-3/4 x 8-3/4	28.2	15,400
MWAW018NE2AA	55.5/53/50.5/48/45.5/44.5/44	12-5/8 x 38-3/4 x 8-3/4	28.2	19,100
MWAW024NE2AA	54/51/49/48/47.5/47/46.5	14-9/16 x 51-9/16 x 10-1/4	48.3	24,200
MWAW030NE2AA	57/55.5/53/51/49.5/49/48.5	14-9/16 x 51-9/16 x 10-1/4	48.3	30,700
MWAW036NE2AA	57/55.5/53/51/49.5/49/48.5	14-9/16 x 51-9/16 x 10-1/4	48.3	30,700