

COOKING

HYPERCORE™

INDUCTION COOKTOP

The HyperCore™ Induction Cooktop brings powerful, precision cooking to your kitchen — driven by four ultra-high-power 10 kW heating elements, each delivering the equivalent of a 72,000 BTU gas burner. All this while still being compatible with a standard 120V

outlet for quick, easy installation. A built-in battery works behind the scenes to support peak performance, and magnetic knobs, intuitive dual cooking modes and a sleek design, HyperCore™ is built to make life, cooking (and clean-up!) a breeze.

ZEPHYR




ZEPHYRONLINE.COM



30"



36"

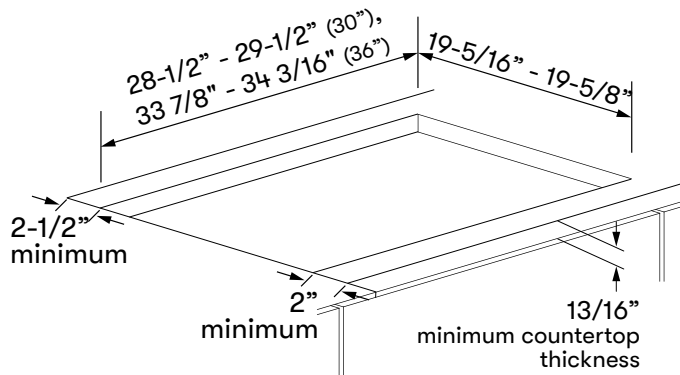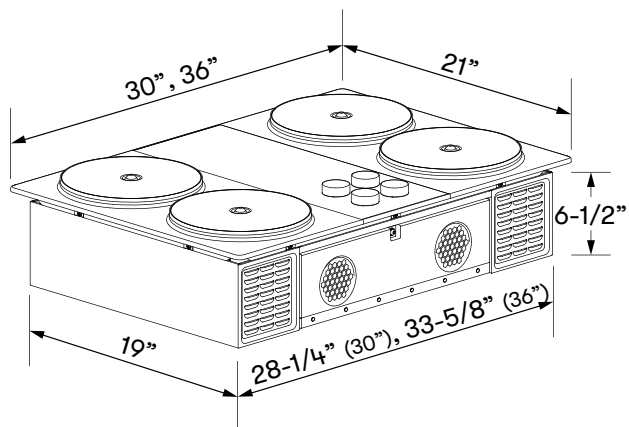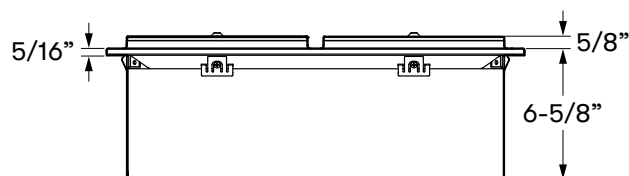

How HyperCore™ Stands Out:



Unmatched Power

Each 10kW element is the equivalent of a 72,000 BTU gas burner, 4x more powerful than traditional gas and 3x more powerful than traditional induction.



Precision Temperature Control

Cook with single degree-level temperature control from 68° - 482°F. That's more precise than an oven, but on your cooktop.



Intuitive Interface

A 12.8-inch display provides a clear view of the cooking mode, while removable magnetic knobs simplify cleanup and improve safety.



Easy Install

The HyperCore cooktop fits into 90% of existing cooktop openings. Due to the integrated 3 kWh battery, the cooktop can be plugged into a 120V or 240V outlet. No electrician needed.

MODEL

Induction Cooktop

Overall Width

Overall Depth

Overall Height

- Above surface of countertop
- Below surface of countertop

Battery, Required

Battery Type

Battery Capacity

ZHCT130AC

30"

21"

15/16"

6-1/2"

ZHB13A

Lithium Iron Phosphate (LFP)

3 kWh

ZHCT136AC

36"

21"

15/16"

6-1/2"

ZHB13A

Lithium Iron Phosphate (LFP)

3 kWh

SPECIFICATIONS

Color

Weight with battery (net)

Heating Element Quantity

Heating Element Diameter

Max Power Capacity

Temperature Range

User Interface

Wi-Fi Connectivity

Hot Surface Indicator

Charcoal finish

159lbs.

4

9"

10 kW per heating element

68°F - 482°F

12.8" Display

Removable Magnetic Knobs

Yes, required

Yes, LED Element Rings (4)

Charcoal finish

172lbs.

4

9"

10 kW per heating element

68°F - 482°F

12.8" Display

Removable Magnetic Knobs

Yes, required

Yes, LED Element Rings (4)

ENHANCED FEATURES

Power Boost

Instantly delivers maximum heat for rapid boiling and high-intensity cooking.

ExactTemp™

Cook in single-degree temperature increments for delicate tasks such as tempering chocolate, maintaining oil temperature, or cooking eggs to perfection.

ExactSense™

Proprietary sensor technology measures the temperature inside the pan rather than just the bottom of the pan. Measurements are taken multiple times per second to ensure accurate temperatures.

Dual Cooking Modes

Cook in Power Mode (watts) for traditional low, medium, and high settings, or switch to Temperature Mode (°F) and cook in single-degree increments.

CUTOUT SIZE

Cutout Width

Cutout Depth

Clearance from Rear Wall

Clearance from Front Edge of Counter

28 1/2" - 29 1/2"

19 5/16" - 19 5/8"

2 1/2" [minimum]

2" [minimum]

33 7/8" - 34 3/16"

19 5/16" - 19 5/8"

2 1/2" [minimum]

2" [minimum]

WARRANTY

3 years parts, 2 years labor, 10 years battery

3 years parts, 2 years labor, 10 years battery

ELECTRICAL SPECIFICATIONS

120V* vs. 240V

	120V	240V
Max Appliance Current Rating	12.5A	8.3A
Max Connected Load	1.5 kW	2 kW
Max Overcurrent Protective Device (OCPD) Rating	20A	30A
Frequency	60Hz	60Hz

*59" long 120V power cord is pre-installed.

Powered by **impulse**

Specifications subject to change, check zephyronline.com for up-to-date information.
 Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

JUL26.0101

