



XOU24WDZGOA

24" UNIVERSAL DUAL-ZONE WINE COOLER
ADA COMPLIANT

LIFESTYLE REFRIGERATION



XOU24WDZGOA

- Fits US / European / ADA
- Articulating Hinge
- Handleless
- Adapts for European Toe Kicks/ Plinth

24" UNDERCOUNTER WINE COOLER with OVERLAY FRAME DOOR


The ALL PURPOSE UNIT. With soft closing, reversible articulated hinges - the GOA units provide a perfectly integrated look whether you are installing under ADA or Standard height counters, using American or European style cabinetry, and can accommodate a 3, 4 or 6 inch toekick.

The XO GOA system is truly your all purpose undercounter solution.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

Unit Has Field Reversible Door

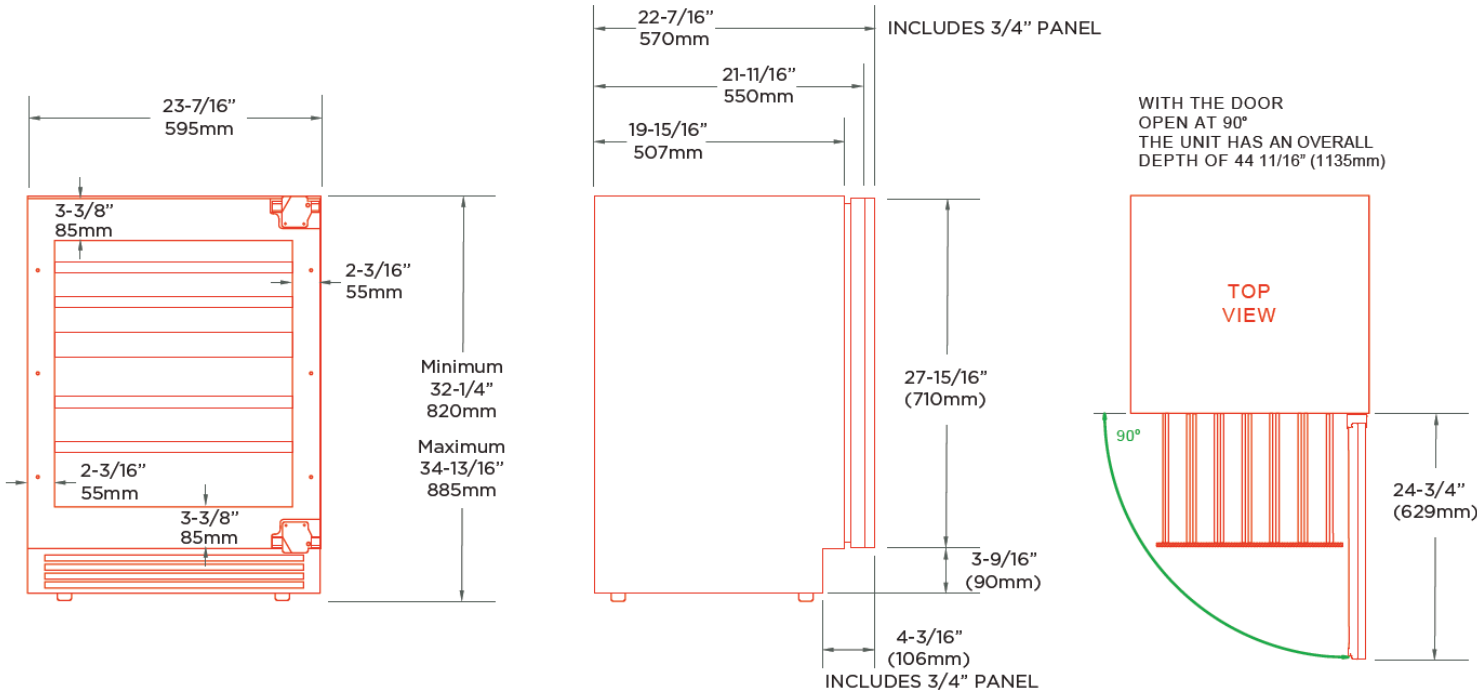

ROUGH IN

SPECIFICATIONS

CAPACITY

Full extension smooth glide racks hold:
(12) 750ml bottles upper section at 41° to 50° F
(21) 750ml bottles lower section at 50° to 64° F

FEATURES


- Articulated hinges for seamless integration
- Soft closing, field reversible door
- Library quiet 39 dBA operation
- Elegant tri-color interior illumination
- True seamless cabinet integration
- Intuitive digital touch controls
- 6 1/2' power cord with low profile 90 flat plug
- Low E Glass blocks harmful UV light
- Alarm Functions
- Energy Saver and Sabbath Mode

* Note: zero clearance hinges are visible just above and below the door panel

ELECTRICAL	120V 60HZ 4.35 AMP*
DIMENSIONS	H 32 1/4"min - 34 13/16" max W 23 7/16" D 21 11/16" (w/o finish panel)
ROUGH IN	H 32 1/2" min W 24" D 24"
REFRIGERANT	R600A
OPTIONAL	SS Door Panel for ADA Installs (includes 2 different handles) P/N: XOU24ADASG




ROUGH IN DIMENSIONS

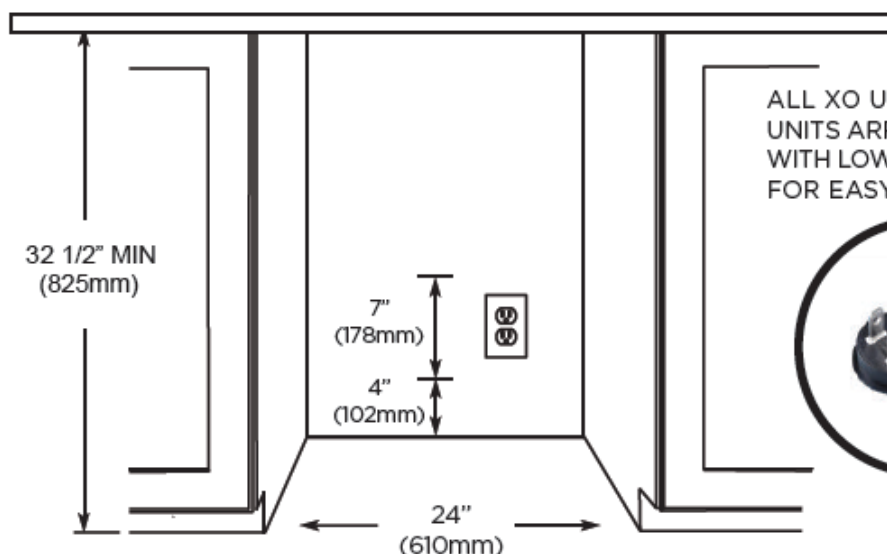


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE




OVERLAY FRAME DIMENSIONS

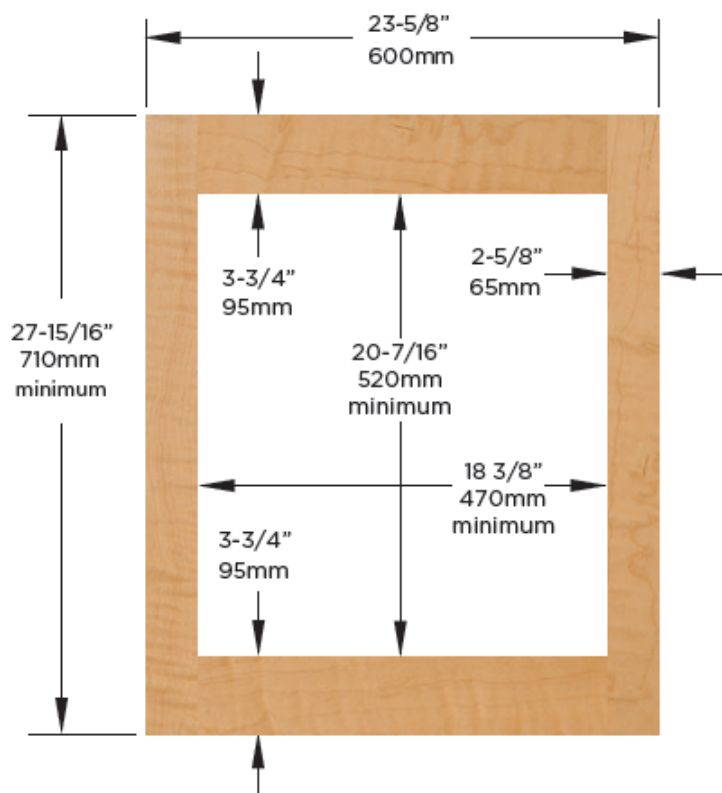

To conceal door completely observe the frame dimensions as minimums.

You can extend panel height but the gap between the bottom of the door and the floor must be at least 3" for ventilation.

To reduce possibility of warping - overlay frame should be finished on all sides.

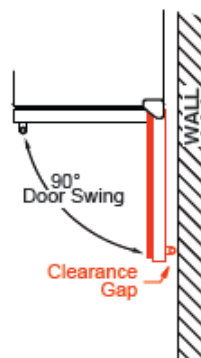

WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.


XO the next level
in luxury appliances

xoappliance.com | 800.966.8300

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.


ROUGH IN DIMENSIONS

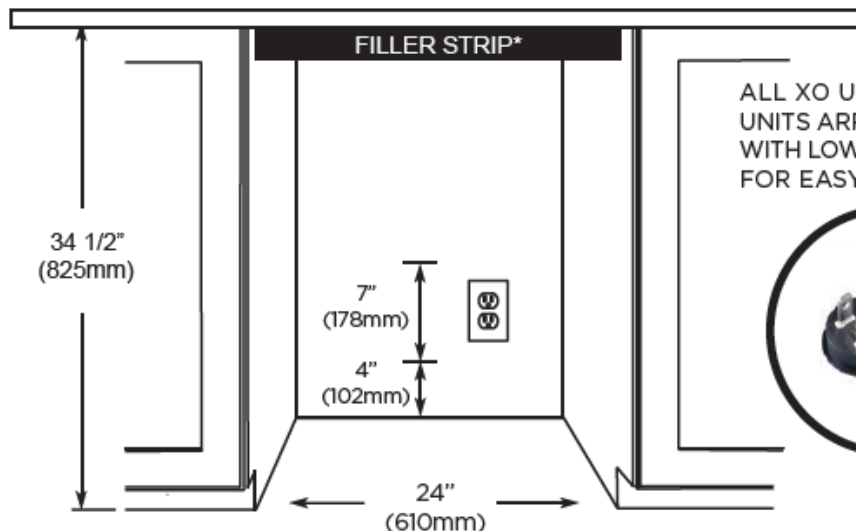

ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION




NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE



* For US cabinets, use a filler strip to close the gap above the unit behind the door (an ell bracket is included)
For European cabinets with a 6" toekick, raise the unit by 2" using the leveling legs and install a custom plinth leaving an open space for ventilation (consult manual)


OVERLAY FRAME DIMENSIONS

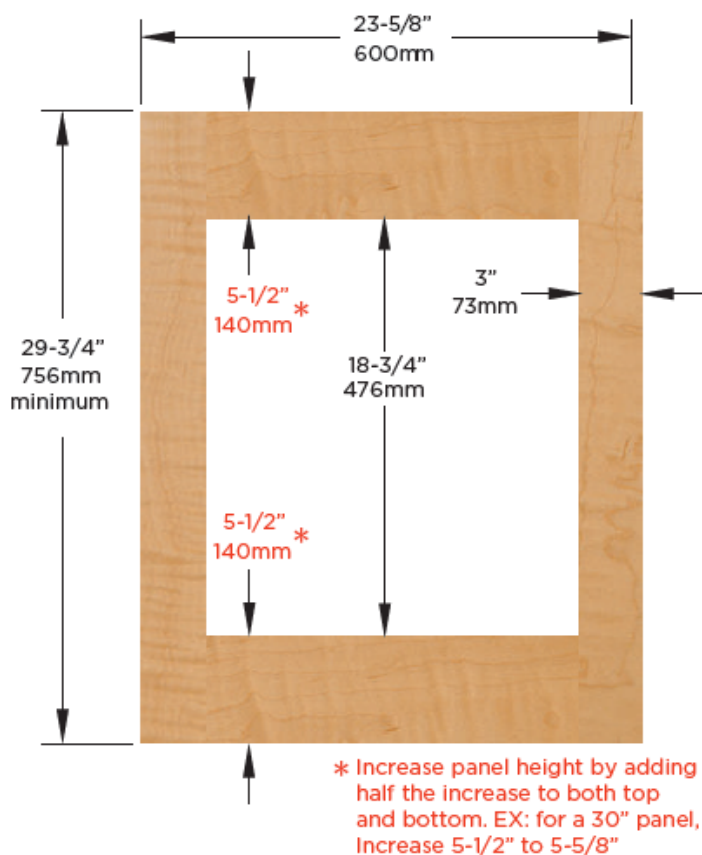

To conceal door completely observe the frame dimensions as minimums.

You can change panel height but the gap between the bottom of the door and the floor must be at least 3" for ventilation.

To reduce possibility of warping - overlay frame should be finished on all sides.



WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

XO the next level
in luxury appliances

xoappliance.com | 800.966.8300

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.