

500 Series, French Door Bottom Mount Refrigerator, 36", Stainless Steel B36FD52SNS



- QuickIce Pro System™ for fast ice
- Spacious Standard Depth
- New Anti-Fingerprint Stainless Steel
- Bottle Fill for a hands-free filling experience
- UltraClarityPro® Water Filter

UPC code: 825225970767
 Color: Stainless Steel
 Panel Ready: Not Possible
 Silence Level: 40 dB(A) re 1pW
 Watts: 180 W
 Fuse protection: 10 A
 Volts: 110-120 V
 Frequency: 60 Hz
 ENERGY STAR® certified: Yes
 Power Cord Length: 66 15/16 "
 Plug Type: 120V-3 prong
 Required Cutout Size (HxWxD) (in): 70 x 36 x 25
 Product Packaging Dimensions (HxWxD): 73.03 x 39.29 x 35.98
 Total Unit Gross Capacity - AHAM: 26.0 Cu Ft
 Refrigerator Gross Capacity: 18.0 Cu Ft
 Freezer Gross Capacity: 8.0 Cu Ft
 Net Weight: 327.000 lbs
 Gross Weight: 355.000 lbs




BORPLFTR55 Ultraclarity PRO water filter
 FPETHKT50 Fresh Protect Ethylene Starter Kit
 FPETHRF50 Fresh Protect Ethylene Refill Kit


500 Series, French Door Bottom Mount Refrigerator, 36", Stainless Steel

B36FD52SNS

Measurements in inches (mm)

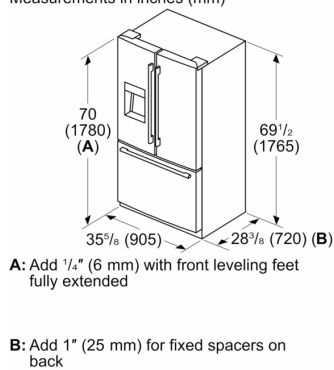


Measurements in inches (mm)

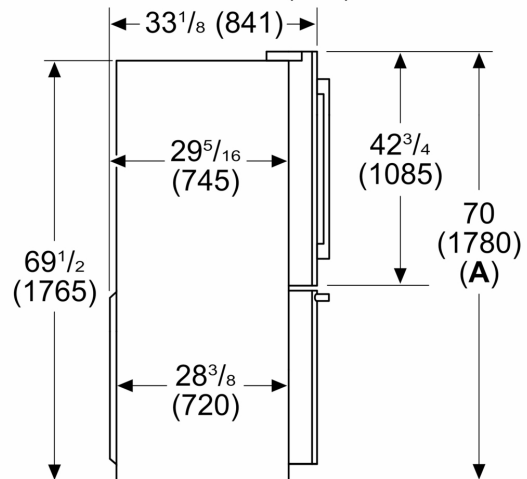


A: Add $\frac{1}{4}$ " (6 mm) with front leveling feet fully extended

Measurements in inches (mm)

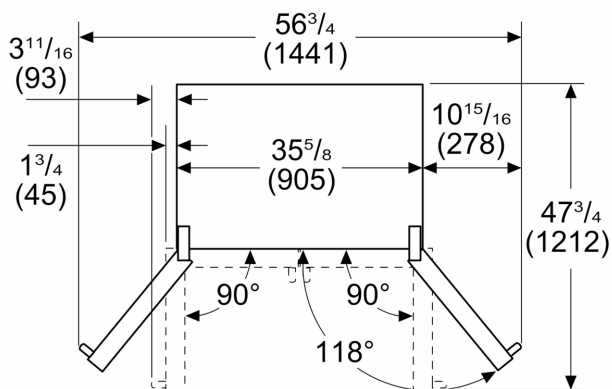


Drawers can be pulled out with door open to 90°
 Drawers can be taken out with door completely opened

measurements in inches (mm)

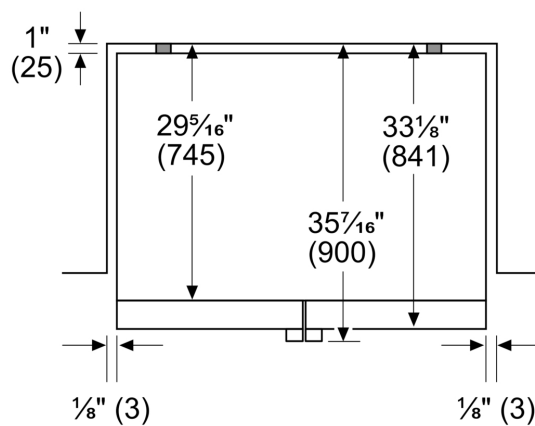

measurements in inches (mm)



Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.