


43000 SERIES RANGE HOOD

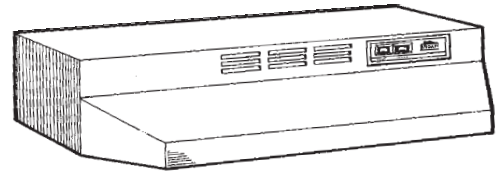

Choose this 4-way convertible hood for round and rectangular ducted, as well as non-ducted configurations.

FEATURES

- 4-way convertible - can be ducted using 7" round or 3¼" x 10" steel ductwork or installed non-ducted
- Includes 3¼" x 10" damper (7" round – purchase Model BP87 damper)
- Includes washable aluminum filter with light lens (non-ducted filter purchased separately)
- Powerful, yet quiet motor and blade combination delivers 200 cfm
- Two-speed rocker switch controls fan
- 75 Watt maximum incandescent light controlled by single rocker switch
- Finished with durable, environmentally friendly, advanced technology powder coating
- All edges hemmed for safety and strength
- Available in 30" and 36" widths in White-on-White, Almond-on-Almond, Biscuit-on-Biscuit, and Stainless Steel finishes

SPECIFICATIONS

VOLTS	HZ.	AMPS	CFM	SONES	DUCT
115	60	1.8	160	7.0	3¼" x 10" (H)
115	60	1.8	190	7.0	3¼" x 10" (V)
115	60	1.8	220	8.0	7" Round (V)



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



TYPICAL SPECIFICATION

The range hood shall be a Broan 43000 Series.

Hood to be 30" (36") in width and finished with White (Almond) (Biscuit) powder-coat or constructed of stainless steel. All exposed edges to be hemmed.


Range hood will be convertible between 7" round, 3¼" x 10" rectangular (vertical or horizontal), and non-ducted discharges. A 3¼" x 10" damper to be included.

Hood shall have a washable aluminum filter and covered light. Incandescent light bulb to be 75 watts maximum.

Range hood to be controlled with two-speed rocker switch for fan and single rocker switch for light.

Air delivery shall be no less than 160 CFM and sound levels no greater than 7.0 Sones (3¼" x 10" horizontal discharge), 190 CFM at 7.0 Sones (3¼" x 10" vertical discharge), or 220 CFM at 8.0 Sones (7" round discharge). All air and sound ratings shall be certified by HVI.

Range hood shall be U.L. listed.

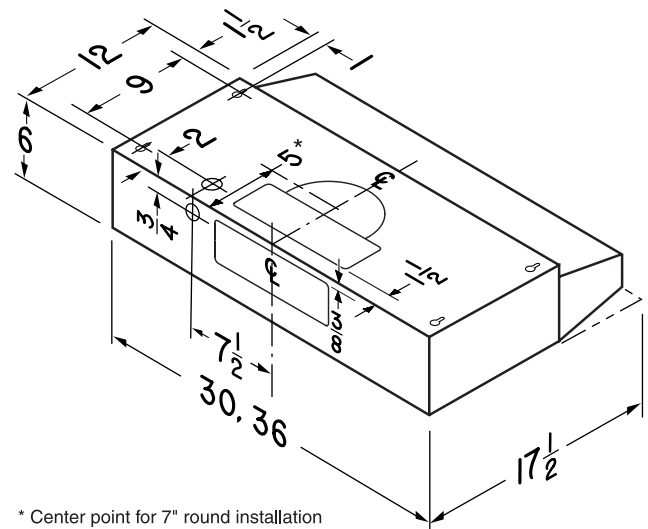

* Center point for 7" round installation

Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date