POD302W
30-INCH DOUBLE BUILT-IN OVEN
PROFESSIONAL COLLECTION

Thermador



Home Connect

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry
- Fast 2-hour self clean mode
- Fast preheat (around 7 minutes)

ACCESSORIES (INCLUDED)

Upper Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Rotisserie; Lower Cavity: 1 Telescopic Rack and 2 Standard Oven Racks

ACCESSORIES (OPTIONAL)

Blue Knob Kit (2 piece, order 2 kits)	WKNOBKT3W

GENERAL PROPERTIES

Heating Modes – Upper Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Heating Modes – Lower Cavity

(13) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast

Sabbath		Yes
Cleaning Type	Upper Cavity Lower Cavity	Easy Clean, Self Clean Easy Clean, Self Clean
Telescopic Rack(s)		4
Illumination Type	Upper Cavity Lower Cavity	Halogen Halogen
Interior Lights	Upper Cavity Lower Cavity	2 2
Home Connect® (Wi-Fi Enabled)		Yes

OVEN PERFORMANCE

Bake / Broil Element	Upper Cavity Lower Cavity	2,400 / 3,800 / 1,000 W 2,400 / 3,800 W
Convection Element	Upper Cavity Lower Cavity	2,000 W 2,000 W

TECHNICAL DETAILS

Watts	9,600 W
Circuit Breaker	40 A
Volts	240 / 208 V
Frequency	60 Hz
Power Cord Length	60"
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)		52 1/16" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)		3/8" to 2" – 9/16" – 0"
Required Cutout Size (HxWxD) – Standard		50"–51 1/2" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush		52 3/16" x 30" x 24 1/2"
Oven Cavity Size	Upper Cavity Lower Cavity	4.5 cu. ft. 4.5 cu. ft.
Overall Oven Interior Dimensions (HxWxD)		17 3/4" x 24" x 17 7/8"
Usable Oven Interior Dimensions (HxWxD)		13 1/2" x 21 5/8" x 16 1/4"
Net Weight		341 lbs


WARRANTY

Limited Warranty Parts and Labor	2 Year

POD302W
30-INCH DOUBLE BUILT-IN OVEN
PROFESSIONAL COLLECTION

30-INCH DOUBLE OVEN

Double Oven Wall Mount Installation
Double Oven Bottom Hinge

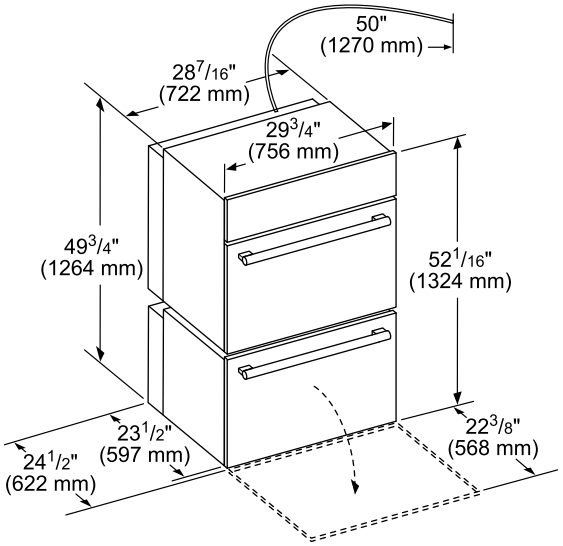

measurements in inches (mm)


Door Handle Depth*

Professional Series Handle



*Protrusion of handle from door skin

Double Oven
Wall Mount Installation

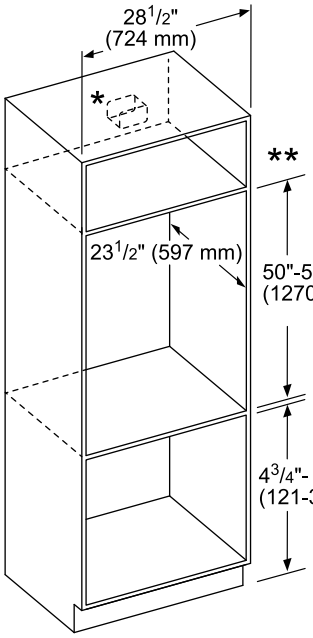


* For double ovens installed into a wall cabinet, the junction box may be located above or beneath the unit within reach of the power cord.

**For oven installation in a wall cabinet, the control panel overlap is a min. 3/8" (10 mm) to max. 1 1/4" (25 mm).


measurements in inches (mm)

Double Oven Flush Mount Installation
Top View Bottom Hinge Door

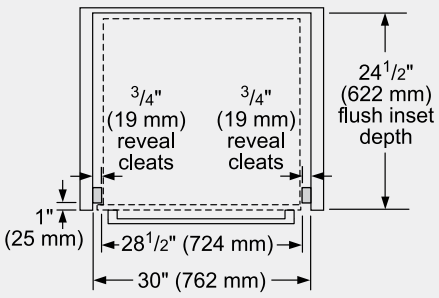

measurements in inches (mm)

Double Oven Flush Mount Installation
Side View Right Hinge, Left Hinge and Bottom Hinge

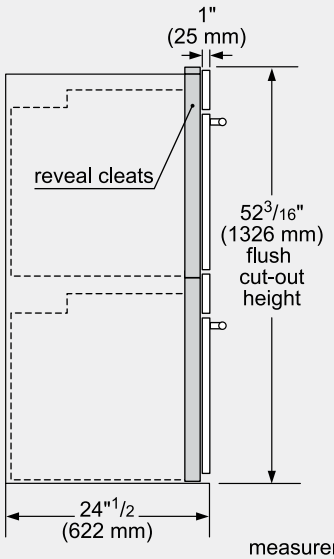


measurements in inches (mm)

PFAS

POD302W
30-INCH DOUBLE BUILT-IN OVEN
PROFESSIONAL COLLECTION

INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

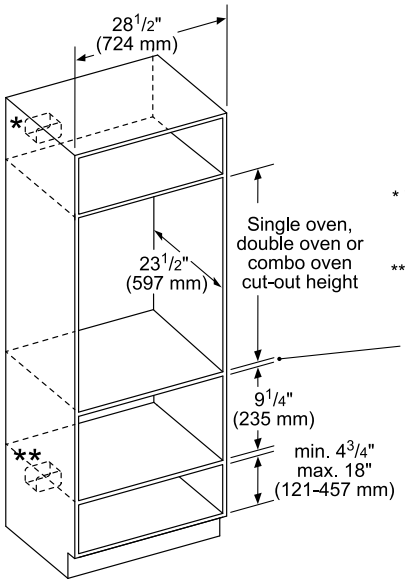


* Wall oven junction box may be located above or to the right or left of the unit within reach or the power cable.

**Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

Minimum 3/4" (18 mm) required between cut-outs.

measurements in inches (mm)

Flush installation
Double or combo oven over storage or warming drawer

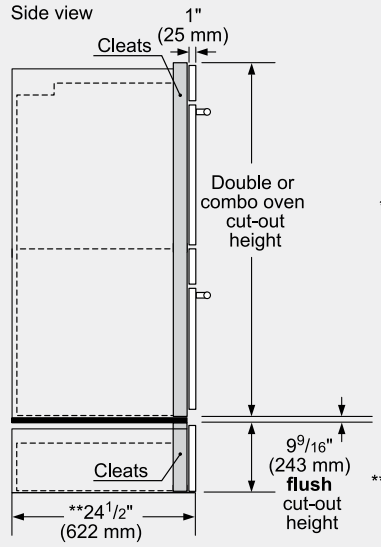

*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum 1/2" (13 mm) required between cut-out*

Warming drawer

**For WD30W, the installed dimension may differ. This is based on 3/4" (19 mm) thick custom panel.

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2026 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.