
# PCG364WD
## 36-INCH GAS RANGETOP WITH GRIDDLE
### PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE

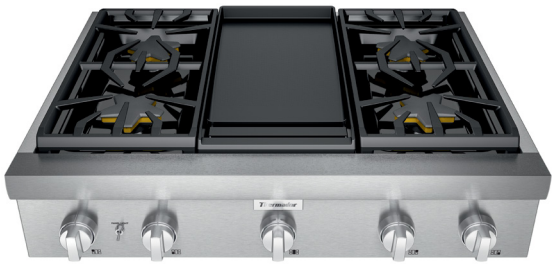

## FEATURES & BENEFITS


- ★ - Exclusive Star® Burner delivers superior flame spread for more even heating with QuickClean Base® designed for easy cleaning
- ★ - 2 ExtraLow® burners offer precision simmering, melting or keeping warm
- Non-stick griddle provides even heating across the entire cooking surface
- LED Down Lighting is hidden discreetly above the control panel, providing functional and stylish illumination
- Restaurant style metal knobs

| GENERAL PROPERTIES | |
|---|---|
| Controls | Metal Knobs |
| Sealed Burners | Yes |
| Grate Material | Cast Iron |
| **BURNER PERFORMANCE** | |
| Total Number of Cooktop Burners | 4 + Griddle |
| Power of Front Left Burner (NG) | 18,000 and XLO (NG) |
| Power of Back Left Burner (NG) | 15,000 and XLO (NG) |
| Power of Back Center Burner (NG) | N/A |
| Power of Front Center Burner (NG) | N/A |
| Power of Center 12" Electric Griddle (W) | 1,630 W |
| Power of Center 12" Electric Grill (W) | N/A |
| Power of Back Right Burner (NG) | 15,000 (NG) |
| Power of Front Right Burner (NG) | 18,000 (NG) |
| **TECHNICAL DETAILS** | |
| Circuit Breaker (A) | 20 A |
| Volts (V) | 120 V |
| Frequency (Hz) | 60 Hz |
| Plug Type / Receptacle | 120V-3 Prong NEMA 5-20 |
| Power Cord Length (in) | 65" |
| Energy Source | Gas |
| Gas Type | Natural Gas 6" Water Column (14.9 mb) Min. (USA) |
| Alternative Gas Type | LP 11" Water Column (27.4 mb) Min. (USA) |
| Convertible To LP (Kit Required) | Yes |
| **DIMENSIONS & WEIGHT** | |
| Overall Appliance Dimensions (HxWxD) (in) | 8 1/8" x 35 15/16" x 25 13/16" |
| Required Cutout Size (HxWxD) (in) | 7 11/16" x 35 1/8" x 22 13/16" |
| Minimum Distance From Rear Wall (in) | 6" Min. to Combustible Surface |
| Net Weight (lbs) | 155 lbs |
| **WARRANTY** | |
| Limited Warranty, Entire Appliance, Parts and Labor | 2 Year |

★ THERMADOR® EXCLUSIVE

# PCG364WD
## 36-INCH GAS RANGETOP WITH GRIDDLE
### PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE

## ACCESSORIES (OPTIONAL)



PA12GRILFE
Grill plate designed to replace the griddle plate for convenient indoor grilling (Available August 2026)



PAGRIDDLE
Griddle Sits on Top of Grates Over 2 Star Burners



PA12CHPBLK
12" Cutting Board



PWOKRINGHC
Wok Ring



PA12LCVRW
12" Pro Grill Cover



PAKNOBLUWR
Metallic Blue Knob Kit



PALPKITHW
LP Conversion Kit, Pro Rangetops (4 & 6 Burners)




PA36WLBC
10" Low Backguard

PAALTKITH
High Altitude Kit, Natural Gas Rangetops, 5,400 ft. to 10,200 ft.

Contact Customer Support
High Altitude Kit, Gas Rangetops Connected to LP Gas, 10,000 ft. to 10,200 ft.

### 36" RANGETOP SIDE VIEW

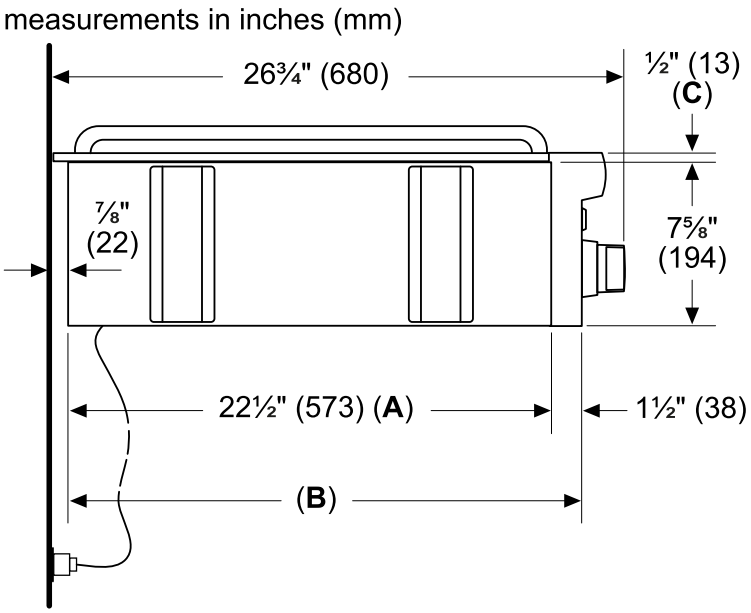



**A**: Cabinet face for installation with projecting control panel.
**B**: Cabinet face for installation with flush control panel.
**C**: Side flange

PFAS

# PCG364WD
## 36-INCH GAS RANGETOP WITH GRIDDLE
PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE

### 36-INCH RANGETOP CUTOUT DIMENSIONS

* Minimum recommended hood width equals that of the range or cooktop.

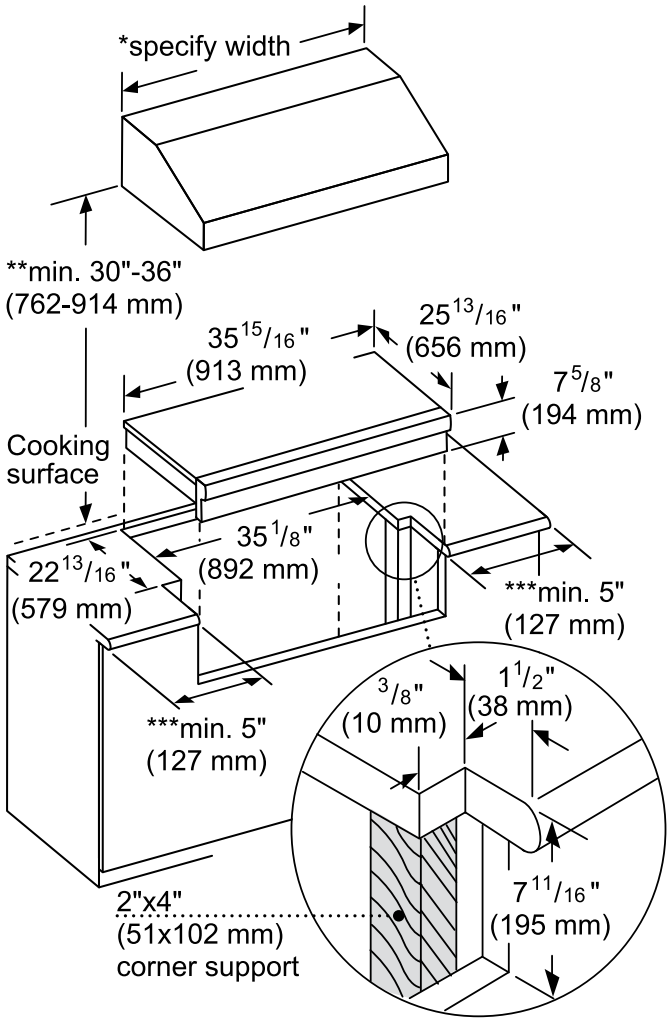


** 36" minimum clearance from cooking surface to combustible surfaces.
*** 5" minimum clearance from cooking surface to combustible side wall.


Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches (mm)

### 36-INCH RANGETOP GAS LOCATION

The gas and electrical supply must be located in an area that is accessible without requiring removal of the rangetop. The appliance electrical power cord and gas pipe connection are located on the left rear underside of the rangetop.

The junction box must be located within 3 feet (~900 mm) of the rangetop connection.

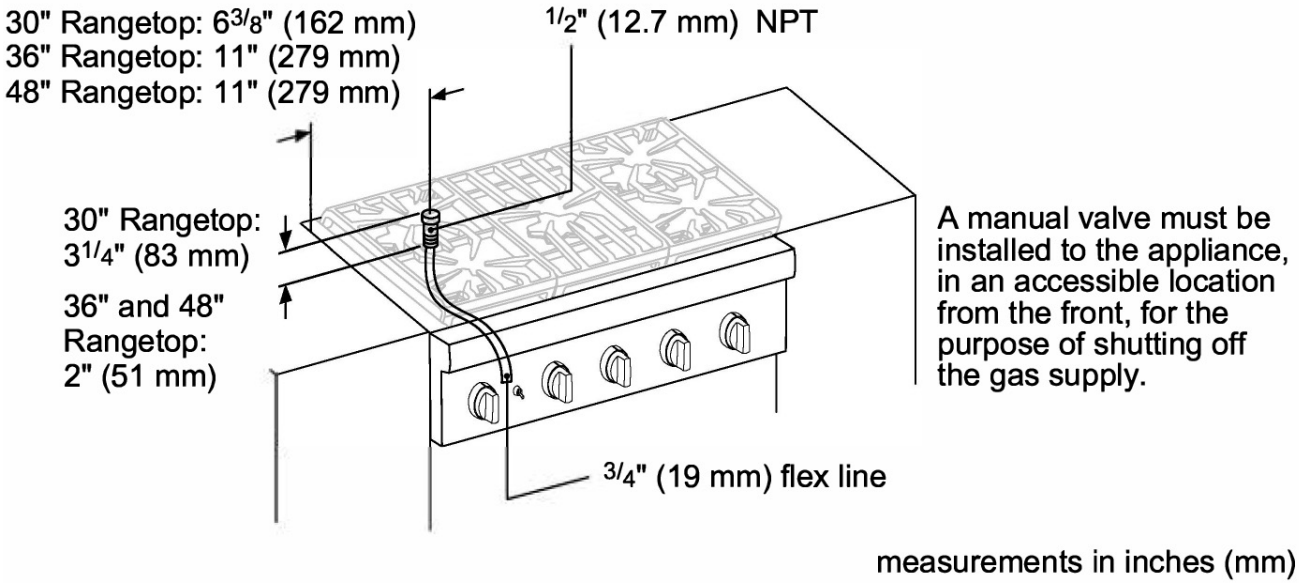


### NATURAL GAS REQUIREMENTS:


Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)
Supply Pressure: 6" min. to 14" max. water column (14.9 mb to 34.9 mb)
Manifold Pressure: 5" water column (12.5 mb)

### PROPANE GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)
Supply Pressure: 11" min. to 14" max. water column (27.4 mb to 34.9 mb)
Manifold Pressure: 10" water column (24.9 mb)

### ELECTRICAL SUPPLY


**IMPORTANT:** The cord supplied with gas rangetops having an electric griddle or grill requires a NEMA 5-20 receptacle as shown here. Local codes my require a different wiring method.




**WARNING:** This appliance is equipped with a three-prong grounding plug for protection against shock hazard and should be plugged directly into a properly grounded receptacle. DO NOT cut or remove the grounding prong from this plug. DO NOT ALTER THIS PLUG.

# PCG364WD
## 36-INCH GAS RANGETOP WITH GRIDDLE
PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE

### 36-INCH RANGETOP CLEARANCES

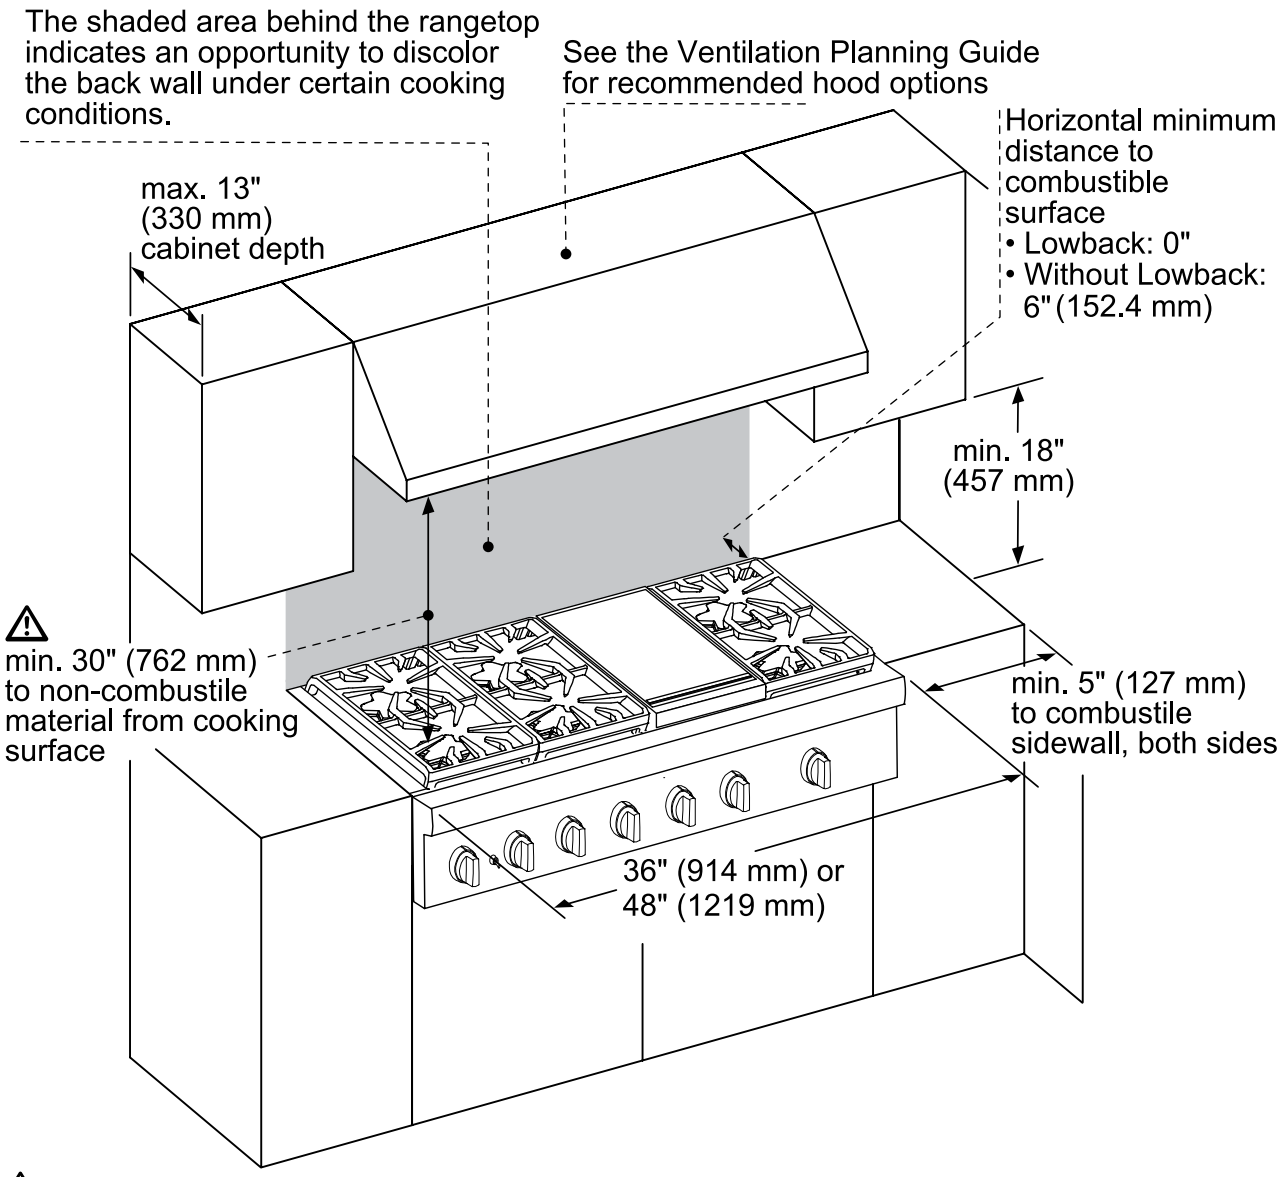


⚠ As defined in the “National Fuel Gas Code” (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances must be approved by the local codes and/or by the local authority having jurisdiction.

measurements in inches (mm)

**NOTE:** A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2026 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.