

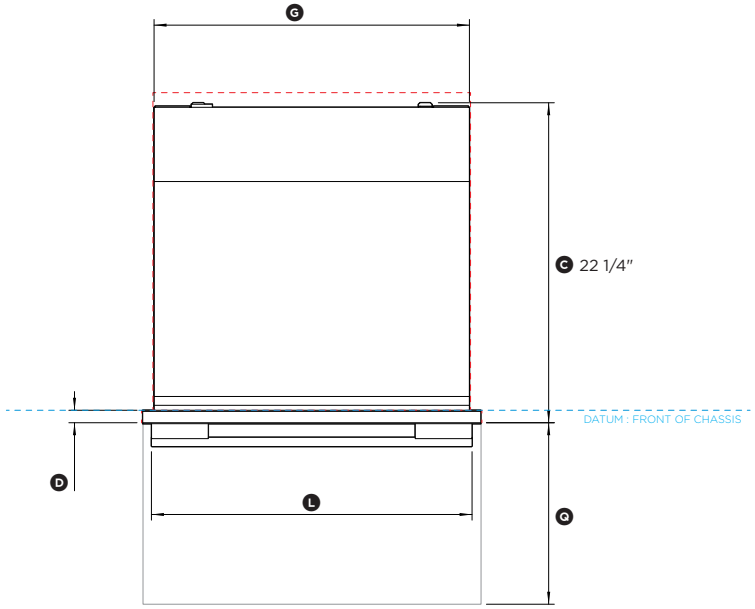
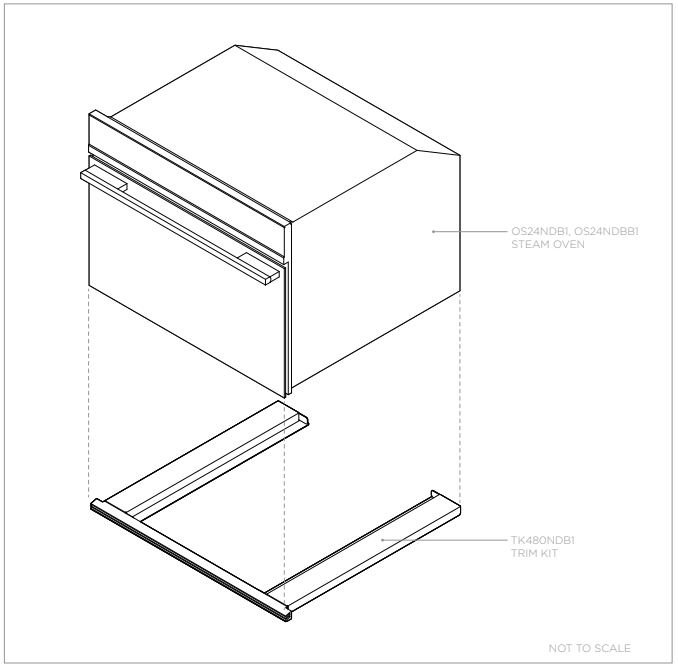



PLAN VIEW

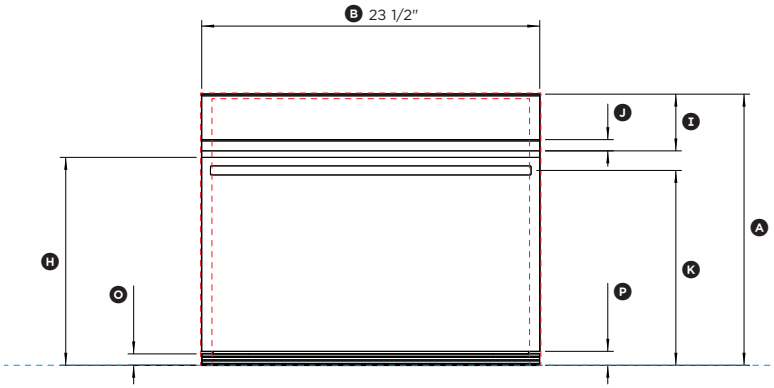


FRONT VIEW

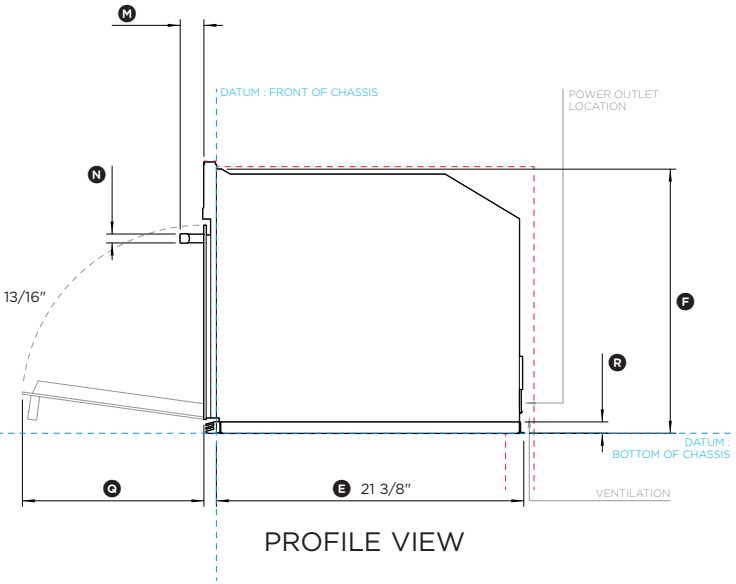


PROFILE VIEW

0 5 10 20
Inches

# FISHER & PAYKEL

**DATA SHEET**
**Steam Oven with Trim Kit**

Model no:
**OS24NDB1 with TK480NDB1, OS24NDBB1 with TK480NDB1**
(refer page 2 for metric measurements)

| Product Dimensions | Inches |
|---|---|
| Ⓐ Overall height of oven and trim | 18 13/16" |
| Ⓑ Overall width of oven | 23 1/2" |
| Ⓒ Overall depth of oven and trim (excludes handle and front metal trim) | 22 1/4" |
| Ⓓ Depth of oven frame and trim surround (excludes handle and front metal trim) | 7/8" |
| Ⓔ Depth of oven chassis and trim brackets | 21 3/8" |
| Ⓕ Height of oven chassis and trim brackets | 18 3/8" |
| Ⓖ Width of oven chassis and trim brackets | 21 7/8" |
| Ⓗ Height from bottom datum to top of oven door | 14 7/16" |
| Ⓘ Height of control panel | 3 15/16" |
| Ⓙ Height of metal cap on control panel | 13/16" |
| Ⓚ Height from bottom datum to centreline of handle | 13 1/2" |
| Ⓛ Width of handle | 22 1/4" |
| Ⓜ Depth of handle (measured from front of door) | 1 5/8" |
| Ⓝ Thickness of handle | 5/8" |
| Ⓞ Distance from bottom datum to top of trim grille | 13/16" |
| Ⓟ Distance from bottom datum to bottom of door glass | 1" |
| Ⓠ Depth of door when opened (measured from front of door) | 12 5/8" |
| Ⓡ Height of trim support brackets | 13/16" |

| Minimum Clearances | Inches |
|---|---|
| Minimum inside height of cavity (proud installation) | 18 1/2" |
| Minimum inside depth of cavity (proud installation) | 22 1/16" |
| Minimum inside width of cavity | 22 1/16" |
| Overall height of cabinetry (cavity around trim surround) | 18 1/8" |
| Overall width of cabinetry (cavity around trim surround) | 23 5/8" |
| Rear ventilation air vent depth* | 2" |
| Rear ventilation air vent width* | 22 1/16" |


*A rear ventilation air vent totalling 43.4in² is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


INDICATES PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------


DATE: **17.06.2019**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

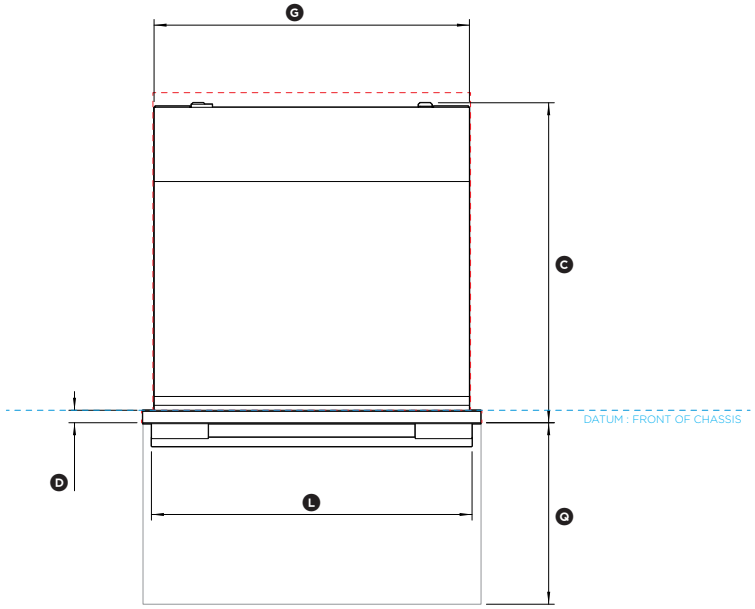



PLAN VIEW

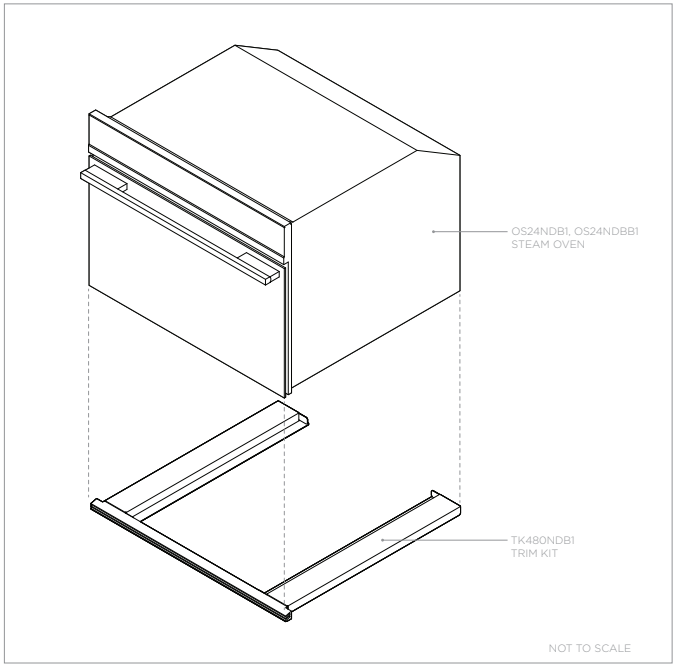

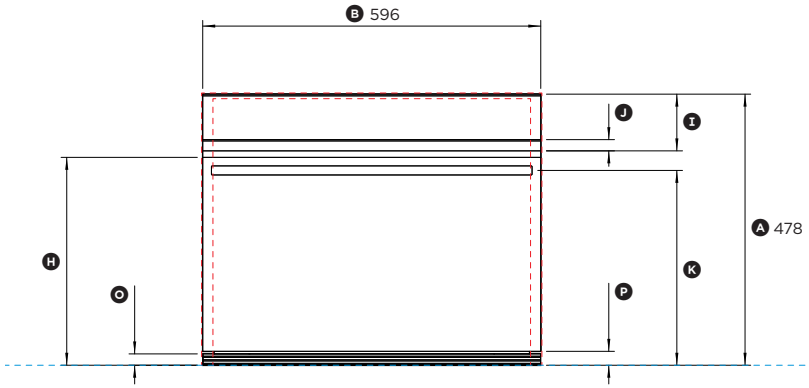
FRONT VIEW

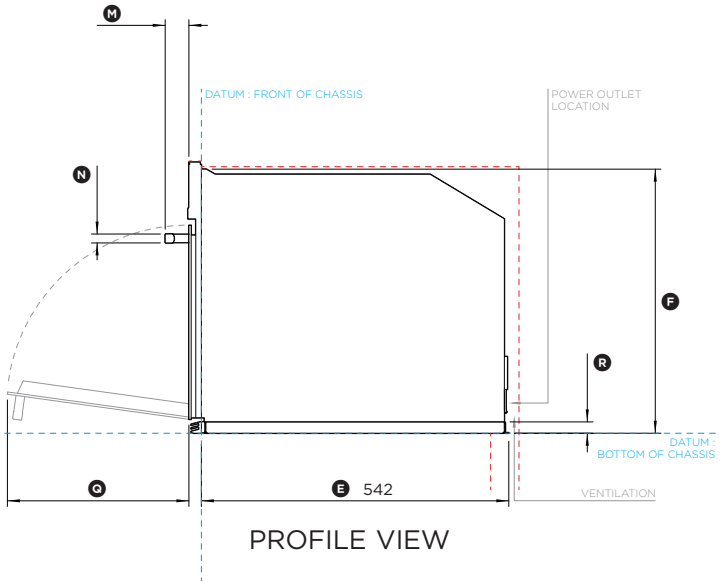


PROFILE VIEW




# FISHER & PAYKEL

**DATA SHEET**
**Steam Oven with Trim Kit**

Model no:

**OS24NDB1 with TK480NDB1, OS24NDBB1 with TK480NDB1**

(refer page 1 for imperial measurements)

| **Product Dimensions** | **mm** |
|---|---|
| Ⓐ Overall height of oven and trim | 478 |
| Ⓑ Overall width of oven | 596 |
| Ⓒ Overall depth of oven and trim (excludes handle and front metal trim) | 564 |
| Ⓓ Depth of oven frame and trim surround (excludes handle and front metal trim) | 22 |
| Ⓔ Depth of oven chassis and trim brackets | 542 |
| Ⓕ Height of oven chassis and trim brackets | 466 |
| Ⓖ Width of oven chassis and trim brackets | 556 |
| Ⓗ Height from bottom datum to top of oven door | 367 |
| Ⓘ Height of control panel | 100 |
| Ⓙ Height of metal cap on control panel | 20 |
| Ⓚ Height from bottom datum to centreline of handle | 344 |
| Ⓛ Width of handle | 565 |
| Ⓜ Depth of handle (measured from front of door) | 42 |
| Ⓝ Thickness of handle | 16 |
| Ⓞ Distance from bottom datum to top of trim grille | 20 |
| Ⓟ Distance from bottom datum to bottom of door glass | 25 |
| Ⓠ Depth of door when opened (measured from front of door) | 320 |
| Ⓡ Height of trim support brackets | 20 |

| **Minimum Clearances** | **mm** |
|---|---|
| Minimum inside height of cavity (proud installation) | 470 |
| Minimum inside depth of cavity (proud installation) | 560 |
| Minimum inside width of cavity | 560 |
| Overall height of cabinetry (cavity around trim surround) | 460 |
| Overall width of cabinetry (cavity around trim surround) | 600 |
| Rear ventilation air vent depth* | 50 |
| Rear ventilation air vent width* | 560 |

*A rear ventilation air vent totalling 280cm² is required. The air vent must be located at the rear of cabinet, it can be positioned at the base, sides, back or top of the cavity.

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **17.06.2019**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com