XOU15BCGO

15” PANEL READY UNDERCOUNTER
BEVERAGE CENTER

LIFESTYLE REFRIGERATION





XOU15BCGO

- Glass Shelves Fully Extend While Loaded
- Tri-Color LED Interior Lighting
- Secure Door Lock
- Shelves Adjust To 15 Different Positions


15 ” UNDERCOUNTER BEVERAGE CENTER w/OVERLAY FRAME DOOR

Store up to 66 (12oz) cans at a frosty 34° to 50° F and still find just what your are looking for. The clear glass shelves fully extend while fully loaded enabling you to see the entire contents at a glance. No more fumbling around or emptying the unit to find what you want.

And because beverages come in all shapes and sizes, the shelves of your XO beverage center can quickly adjust to 15 different positions.

XOU15BCGO

15” PANEL READY UNDERCOUNTER BEVERAGE CENTER

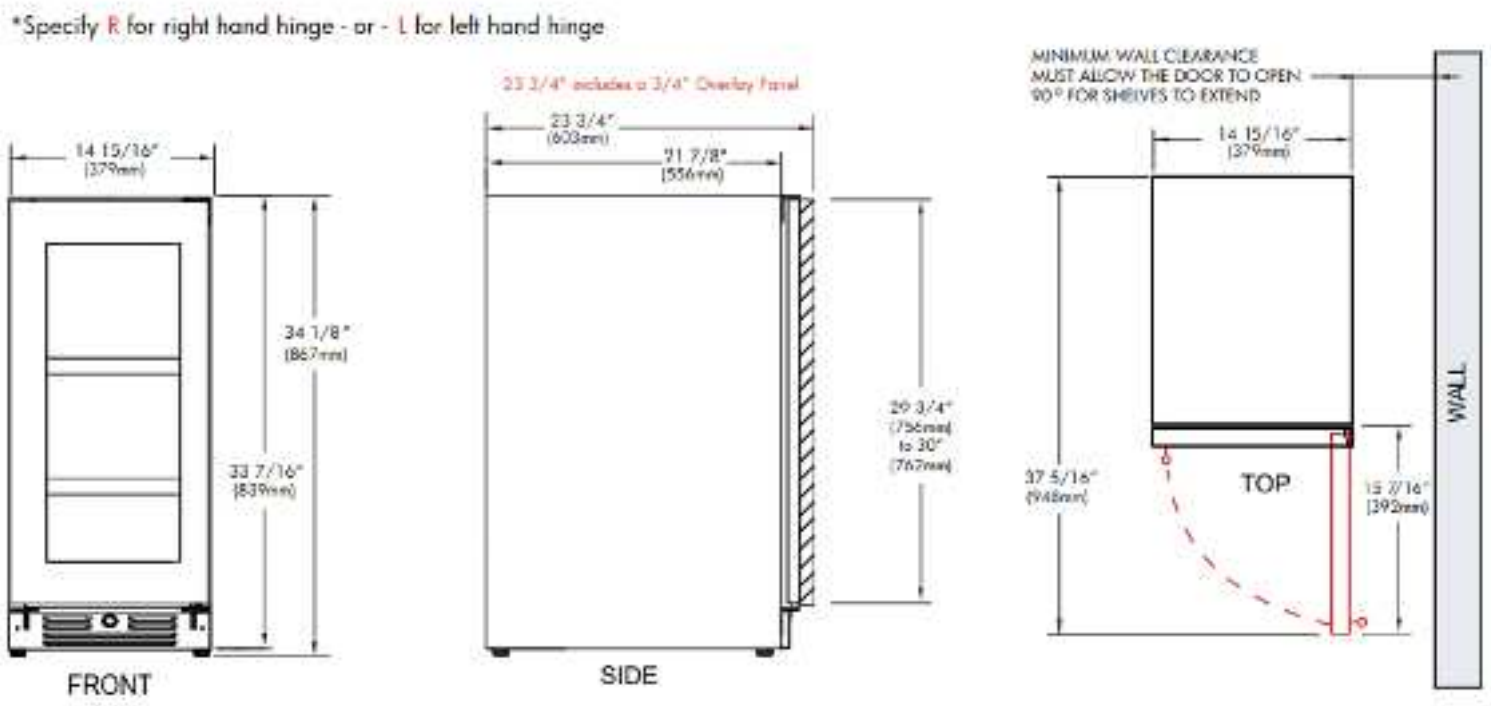

FEATURES

CAPACITY

Full extension clear glass shelves hold:
(66) 12oz Cans At 34° To 50° F

FEATURES

- Glass shelves fully extend to reveal contents
- Tri-color LED interior lighting
- Secure door lock
- Shelves quickly adjust to 15 different positions
- Holds up to 66 (12oz) cans
- Digital temperature control from 34° to 50° F
- Quiet Operation 39 dBA
- Flush installation design for under counter
- Energy-efficient Low-E Glass
- Removable 3 Bottle Wine Cradle included
- X-Active purifies and circulates air
- ENERGY STAR Certified Residential
- Designed for residential or commercial settings

Note: zero clearance hinges are visible
just above and below the door

SPECIFICATIONS

ELECTRICAL	115V-60Hz-1.2 Amps
DIMENSIONS	H 34 1/8” W 14 15/16” D 23 3/4” (w 3/4” finish panel)
ROUGH IN	H 34 1/4“ min W 15 1/4” D 24”
REFRIGERANT	R600A



DESIGNER Handle
Included



3 Bottle Wine Rack
Included

ENERGY STAR


XO the next level in luxury appliances
xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU15BCGO

15” PANEL READY UNDERCOUNTER BEVERAGE CENTER


ROUGH IN DIMENSIONS

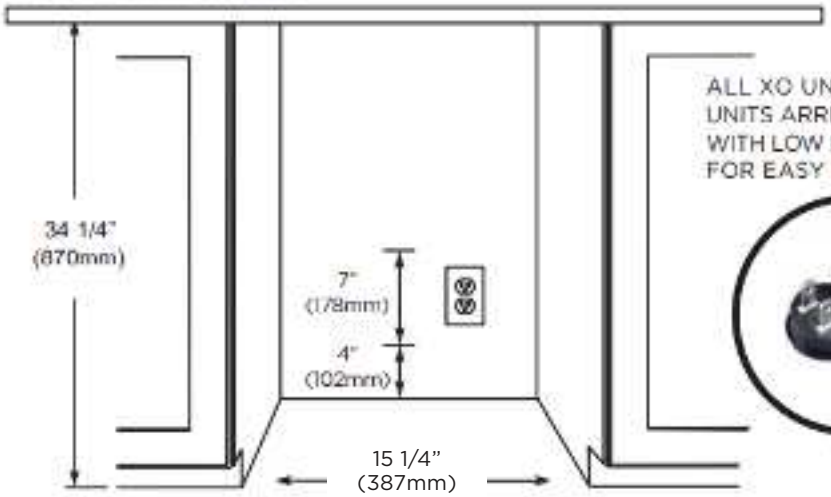


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE







WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES


DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

OVERLAY FRAME DIMENSIONS

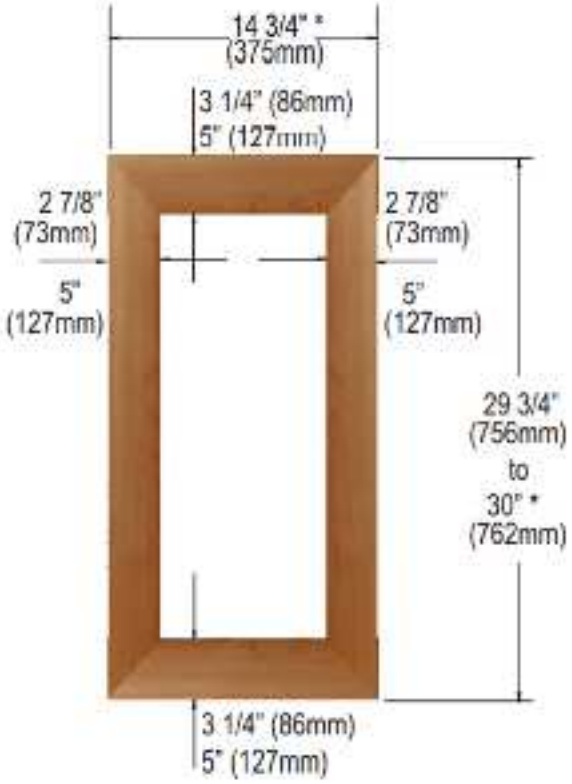



TO ACCOMMODATE THE HINGE PINS ON THE HINGE SIDE OF THE PANEL
Drill a hole at least 5/16" in diameter and 1" deep into the top and bottom of the frame in the location shown

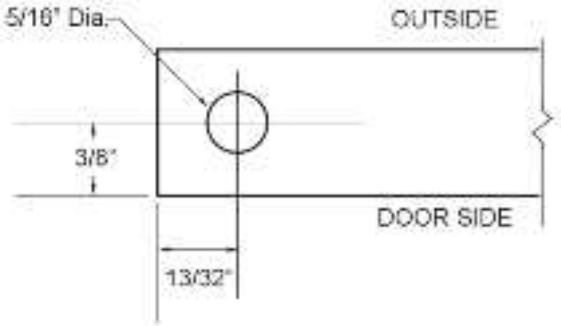

BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.

XO the next level in luxury appliances

xoappliance.com | 800.966.8300