XOU30BWDDGO

30” UNDERCOUNTER COMBO BEVERAGE CENTER
& WINE COOLER GLASS OVERLAY

LIFESTYLE REFRIGERATION





XOU30BWDDGO

- Zero clearance hinges
- Fully extending racks and shelves
- Individual digital touch contols
- Flush Undercounter Installation Design

30” UNDERCOUNTER COMBO UNIT with OVERLAY FRAME DOORS

THE ULTIMATE IN CONVENIENT ENTERTAINING -YOUR FAVORITE VINTAGES AND ICY COLD BEVERAGES READY TO SERVE, JUST WHERE YOU WANT THEM

Your XO French Door Combo Unit has the ability to store wine at 41° to 64° F ready to serve and icy cold beverages from 34° to 50° F in the same compact system.


Designed to fit undercounter and wherever your life takes you.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XOU30BWDDGO

30” PANEL READY COMBO BEVERAGE CENTER & WINE COOLER

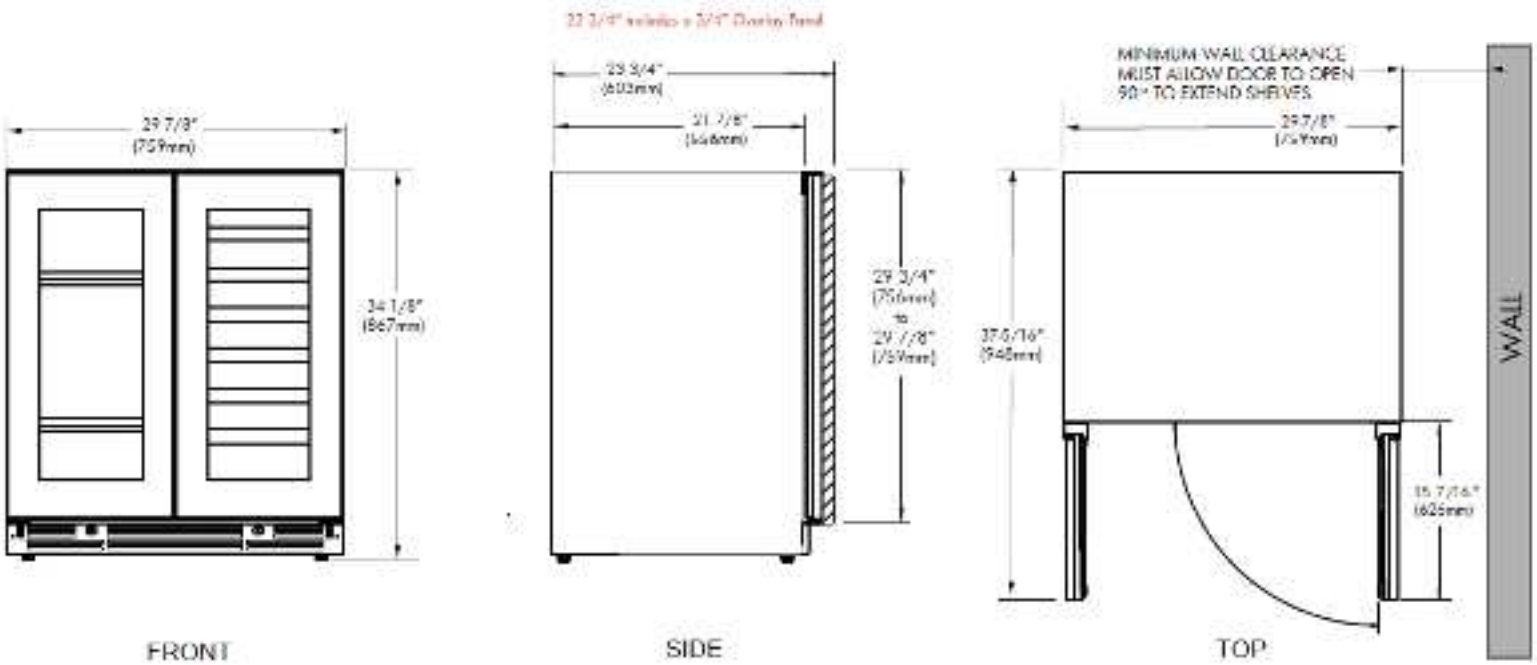

FEATURES

CAPACITY

Full extension smooth glide racks hold:
(28) 750ml bottles at 41° to 64° F
(66) 12oz Cans at 34° to 50° F

FEATURES

- Telescoping racks fully extend while loaded
- Dual Zone stores white and red wine at different temperatures
- Tri-Color LED Lighting
- Secure lock for each door
- Flush Undercounter Installation design
- Independent intuitive electronic controls
- X-Active purifies and circulates air
- Low E-Glass blocks damaging UV light
- Quiet Operation 37 dBA
- Designed for residential or commercial settings

SPECIFICATIONS

ELECTRICAL	115V - 60HZ -1 .2 AMP
DIMENSIONS	H 34 1/8” W 29 7/8” D 23 1/4”
ROUGH IN	H 34 1/4“ min W 30” D 24” (w 3/4” finish panel)
REFRIGERANT	R600A



Watch the Video on YouTube CLICK ON THE IMAGE

the next level in luxury appliances


xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU30BWDDGO

30" PANEL READY COMBO BEVERAGE CENTER & WINE COOLER

ROUGH IN DIMENSIONS

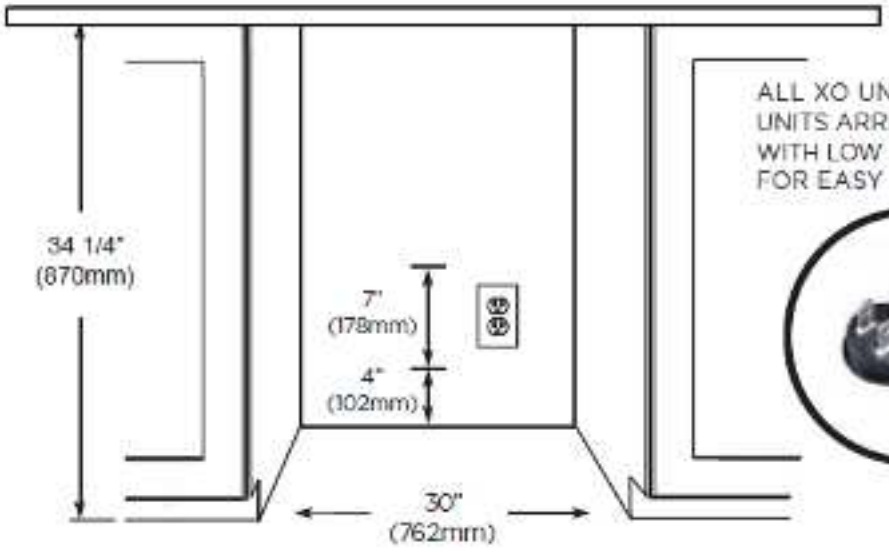


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE







WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.


OVERLAY FRAME DIMENSIONS

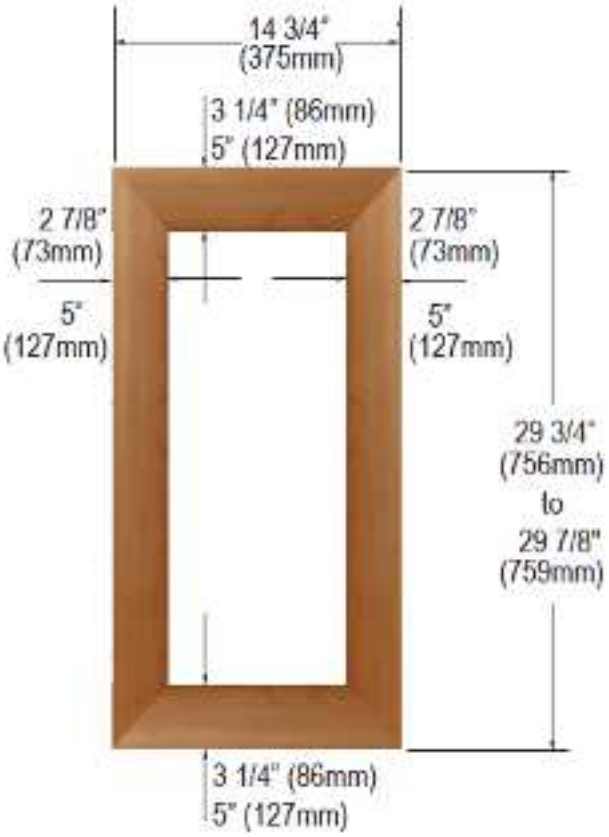

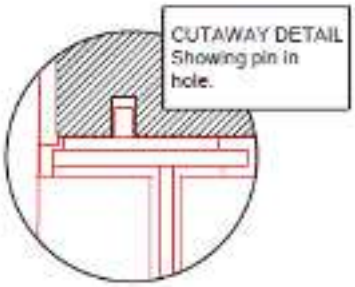

TO ACCOMMODATE THE HINGE PINS ON THE HINGE SIDE OF THE PANEL Drill a hole at least 5/16" in diameter and 1" deep into the top and bottom of the frame in the location shown.

9/16" in from the edge and 7/16" out from the unfinished side facing the door.

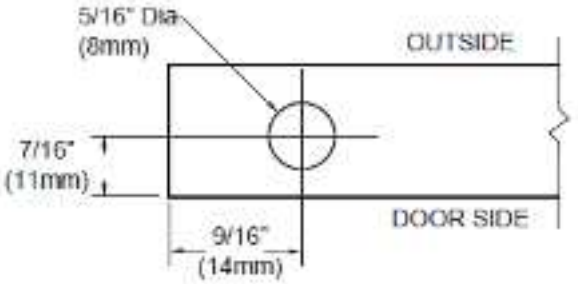

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.