XOU15WGO_

15” PANEL READY SINGLE ZONE
WINE COOLER

LIFESTYLE REFRIGERATION





XOU15WGO_

- Glass Shelves Fully Extend While Loaded
- Tri-Color LED Interior Lighting
- Secure Door Lock
- Shelves Adjust To 15 Different Positions

15 ” UNDERCOUNTER WINE COOLER w/OVERLAY FRAME DOOR

Keep 34 bottles close at hand and ready to serve at 41° to 64° F.


This elegant, efficient wine storage and serving center is the perfect choice for convenient entertaining. At only 15” wide and designed to install flush with your cabinetry, this quiet and efficient wine cooler will prove to be the ideal choice for entertaining or just relaxing.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

XOU15WGO_

15” PANEL READY SINGLE ZONE WINE COOLER

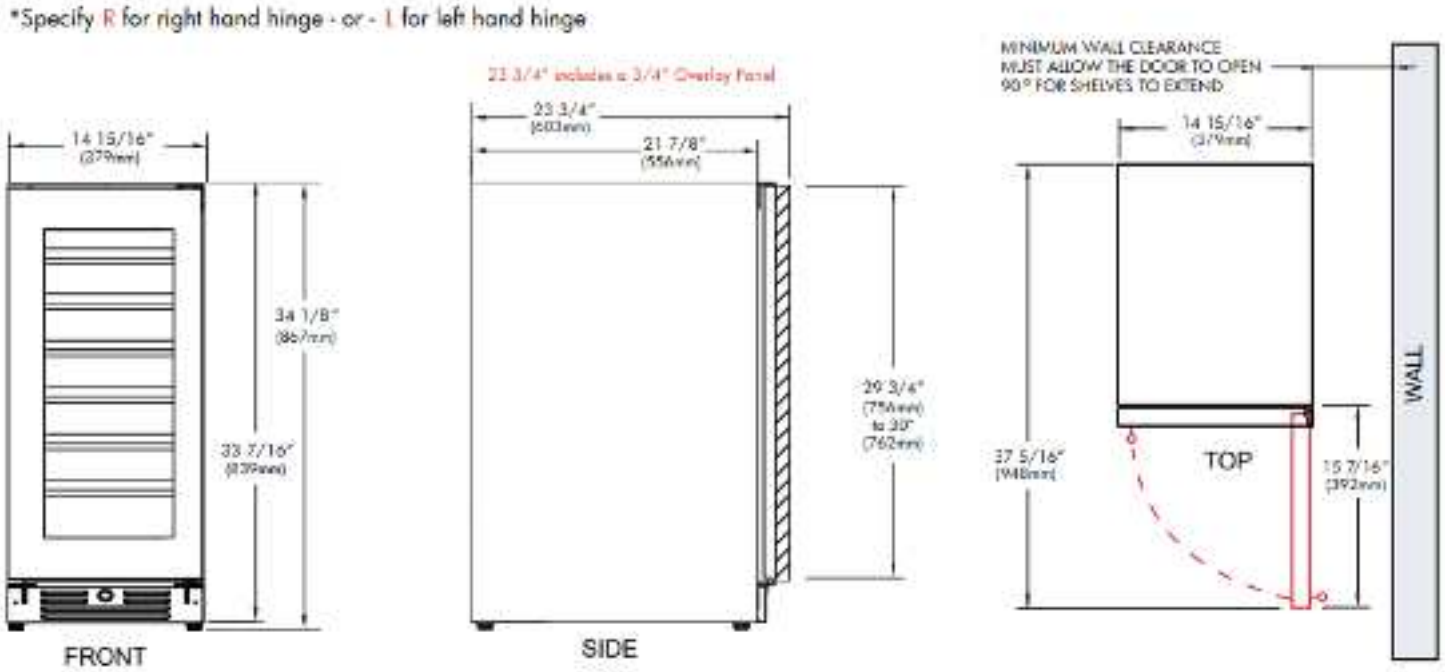

FEATURES

CAPACITY

Full extension smooth glide racks hold:
(28) 750ml bottles at 41° to 64° F

FEATURES

- Wire Racks Absorb Vibration And Extend Fully
- Tri-Color Led Lighting
- Secure Door Lock
- Single Zone To Store And Serve
- Flush undercounter Installation Design
- Low-E Glass Blocks Damaging Uv Light
- Intuitive Electronic Controls
- X-Active purifies and circulates air
- Quiet Operation 39 Dba
- Designed for residential or commercial settings

Note: zero clearance hinges are visible just above and below the door

SPECIFICATIONS

ELECTRICAL	115V 60HZ 1.2 AMP*
DIMENSIONS	H 34 1/8” W 14 15/16” D 23 3/4” (w 3/4” finish panel)
ROUGH IN	H 34 1/4“ min W 15 1/4” D 24”
REFRIGERANT	R600A



Watch the Video on YouTube CLICK ON THE IMAGE

ENERGY STAR

XO the next level in luxury appliances


xoappliance.com | 800.966.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

XOU15WGO_

15” PANEL READY SINGLE ZONE WINE COOLER


ROUGH IN DIMENSIONS

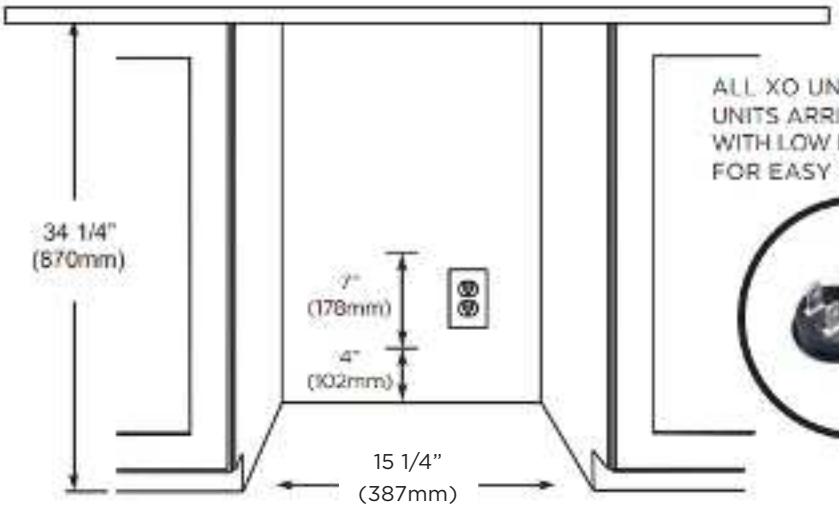


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE







WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES


DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°

OVERLAY FRAME DIMENSIONS

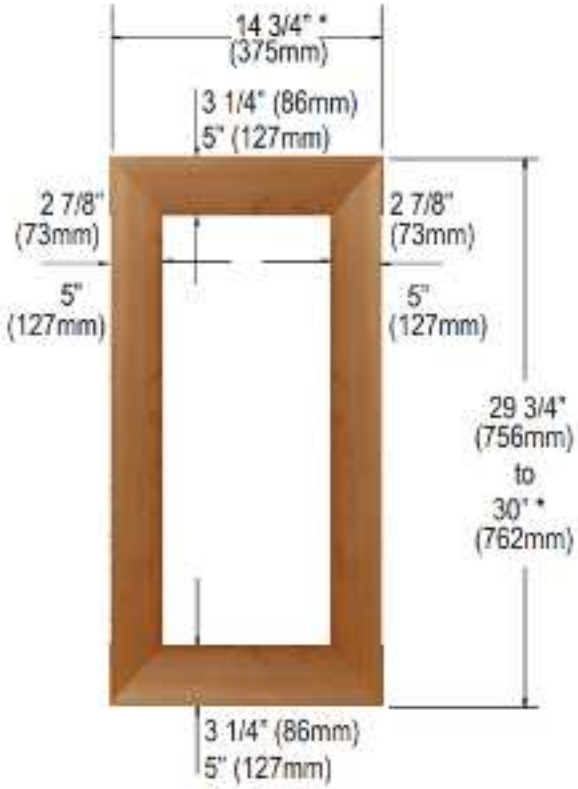



TO ACCOMMODATE THE HINGE PINS ON THE HINGE SIDE OF THE PANEL
Drill a hole at least 5/16" in diameter and 1" deep into the top and bottom of the frame in the location shown

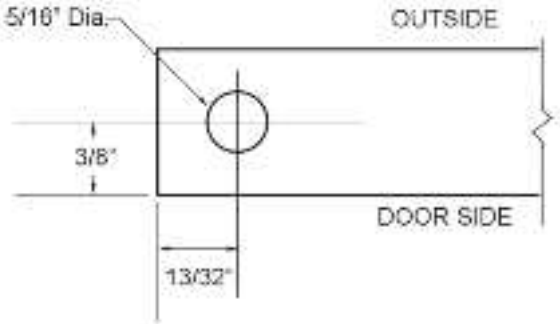

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS

XO the next level in luxury appliances

xoappliance.com | 800.966.8300