Freedom®, Built-in Freezer Column, 18", Panel Ready
T18IF905SP




- Wi-Fi Enabled Temperature Control & Notifications
- Diamond Shaped Ice for elevated beverages
- ENERGY STAR® certified
- All-Leg Leveling for Quicker Installation
- Star-K Certified

UPC code:	825225960430
Color:	Not Applicable
Panel Ready:	Yes, Panel and Handle Sold Separately
Installation Type:	Full-integrated
Silence Level:	42 dBA
Watts:	350 W
Amps:	10 A
Volts:	110-120 V
Frequency:	60 Hz
Total annual energy consumption:	404.0 kWh/annum
ENERGY STAR® certified:	Yes
Power Cord Length:	118
Plug Type:	120V-3 prong
Required Cutout Size (HxWxD) (in):	84 x 18 x 25
Appliance Width (in):	17 3/4
Depth (in):	24
Product Packaging Dimensions (HxWxD):	89.37 x 21.25 x 29.17
Total Unit Gross Capacity :	8.6 Cu Ft
Net Weight:	274.000 lbs
Gross Weight:	303.000 lbs

8 252259 604306


HEATRKIT20	Freedom Heater Kit
FRAMEKIT10	Freedom Frame KIT
MS36HNDL20	36" Masterpiece Handle New
PR36HNDL20	36" Professional Handle New Design
REPLFLTR55	water filter
ICEBUCKETL	Large Ice Bucket
TFL18IR800	18" Flush SS Panel
TFL18IR905	18" Flush SS Panel No Holes

Freedom®, Built-in Freezer Column, 18", Panel Ready
T18IF905SP

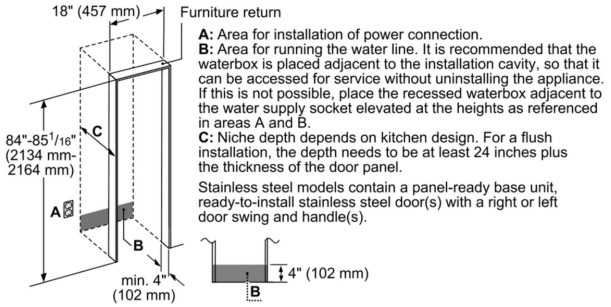

A: Area for installation of power connection.
B: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.
C: Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.

Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).

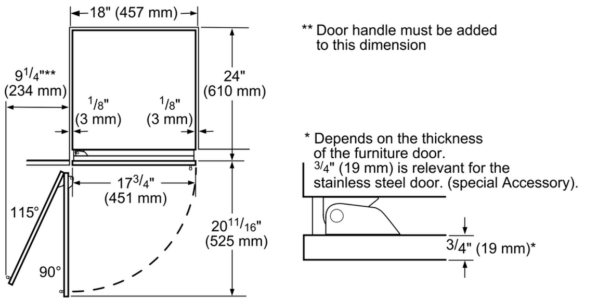

** Door handle must be added to this dimension

* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).

