XOIL_SC

ALL-IN-ONE INSERT BLOWER + LINER

HOW BEAUTIFUL KITCHENS BREATHE





XOIL_SC

- High-Velocity Blower
- Incomparable handcrafted Italian finish
- 3 speed electronic illuminated controls
- 5 Minute delay function

ALL-IN-ONE INSERT BLOWER + LINER

The XOIL series are designed as all-in-one blower / liner combination units for easy installation into custom hoods. Each XOIL model is designed and crafted in Italy to incorporate a multi-speed blower, controls, filtration, LED Lamps and back flow damper. The XOIL is everything you need in one easy to install package.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES


OUR LASTING COMMITMENT TO YOU


LOVE IT OR LEAVE IT

XOIL_SC

ALL-IN-ONE INSERT BLOWER + LINER

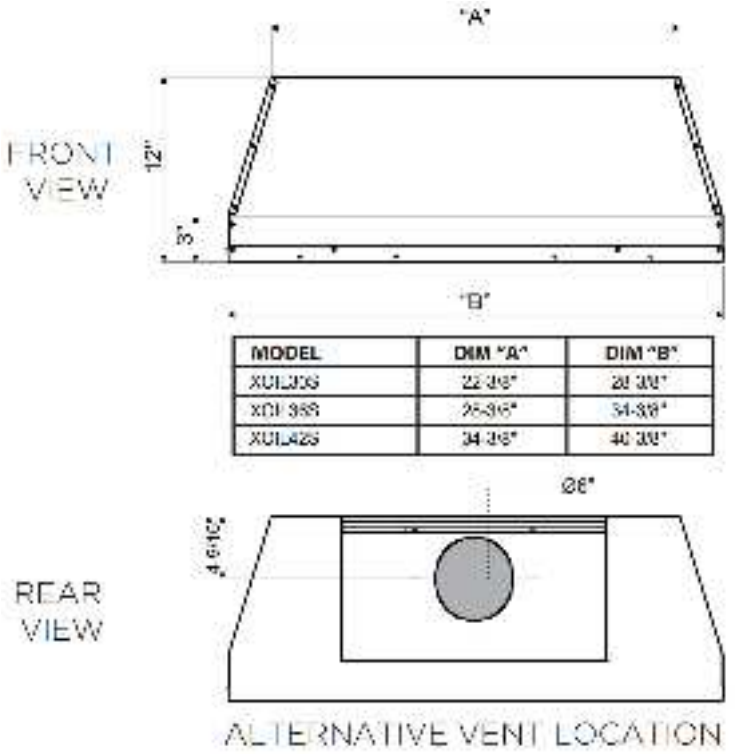

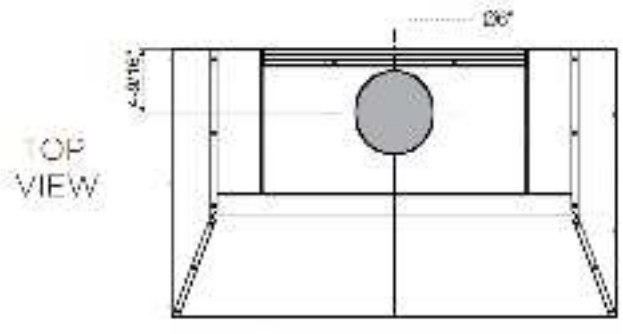

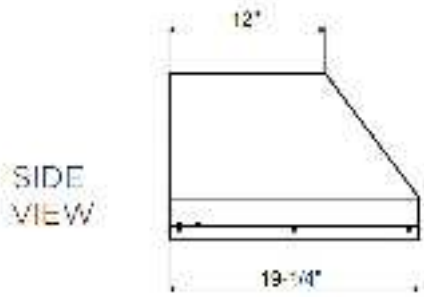

DESIGNED & CRAFTED IN ITALY

FEATURES

FINISH

XOIL SERIES - Stainless Steel
Available in 30" | 36" | 42"
Also available in 48" - 1000 CFM model

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC Code Compliance Control (395 or 600 CFM)*
- Combination Blower and SS Liner in One
- Optional ADA Compatible Remote
- High efficiency dimmable 3000K LED (x2)
- Dishwasher safe SS PRO Baffle filters
- 6" Vertical, Rear or Recirculating (Kit Sold Separately)
  (Filtered, recirculated air must be returned to the living space)
- Made In Italy

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5

SPECIFICATIONS

ELECTRICAL 120VAC 60HZ 3.6 AMP

DIMENSIONS

H 12"
W 28-3/8" | 34-3/8" | 40-3/8"
D 19 1/4"

CUTOUT DIMENSIONS

XOIL3019 28-1/2" x 19-7/16"
XOIL3619 34-1/2" x 19-7/16"
XOIL4219 40-1/2" x 19-7/16"

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit	**XORFK12**
Recirculation Filters	**XORFRND**
ADA Compatible Remote	**XOVREMOTE1**
Make Up Air Kit (6")	**XOMA06**

DUCT OPTIONS:

6 in. round duct Top or Rear
Ductless option available

XO the next level in luxury appliances
xoappliance.com | 800.966.8300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOIL_SC

ALL-IN-ONE INSERT BLOWER + LINER

RECOMMENDED MOUNTING HEIGHT


All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.



THESE MODELS HAVE A 6" DIAMETER EXHAUST DUCT WHICH MAY BE CONFIGURED FOR TOP OR REAR DISCHARGE - CONSULT MANUAL FOR ADDITIONAL INFORMATION.

RECIRCULATION

These XOIL models may be installed with an optional recirculation kit when venting outside is not practical. When used in recirculation mode the filtered exhaust must be ducted back into the living space. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.

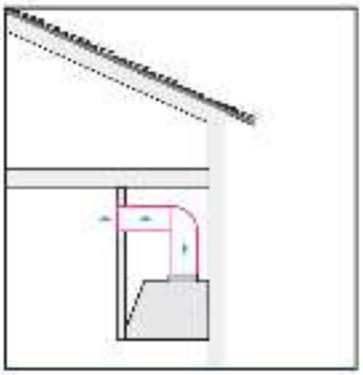

HOW DOES CODE COMPLIANCE CONTROL HELP -

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.