DATA SHEET

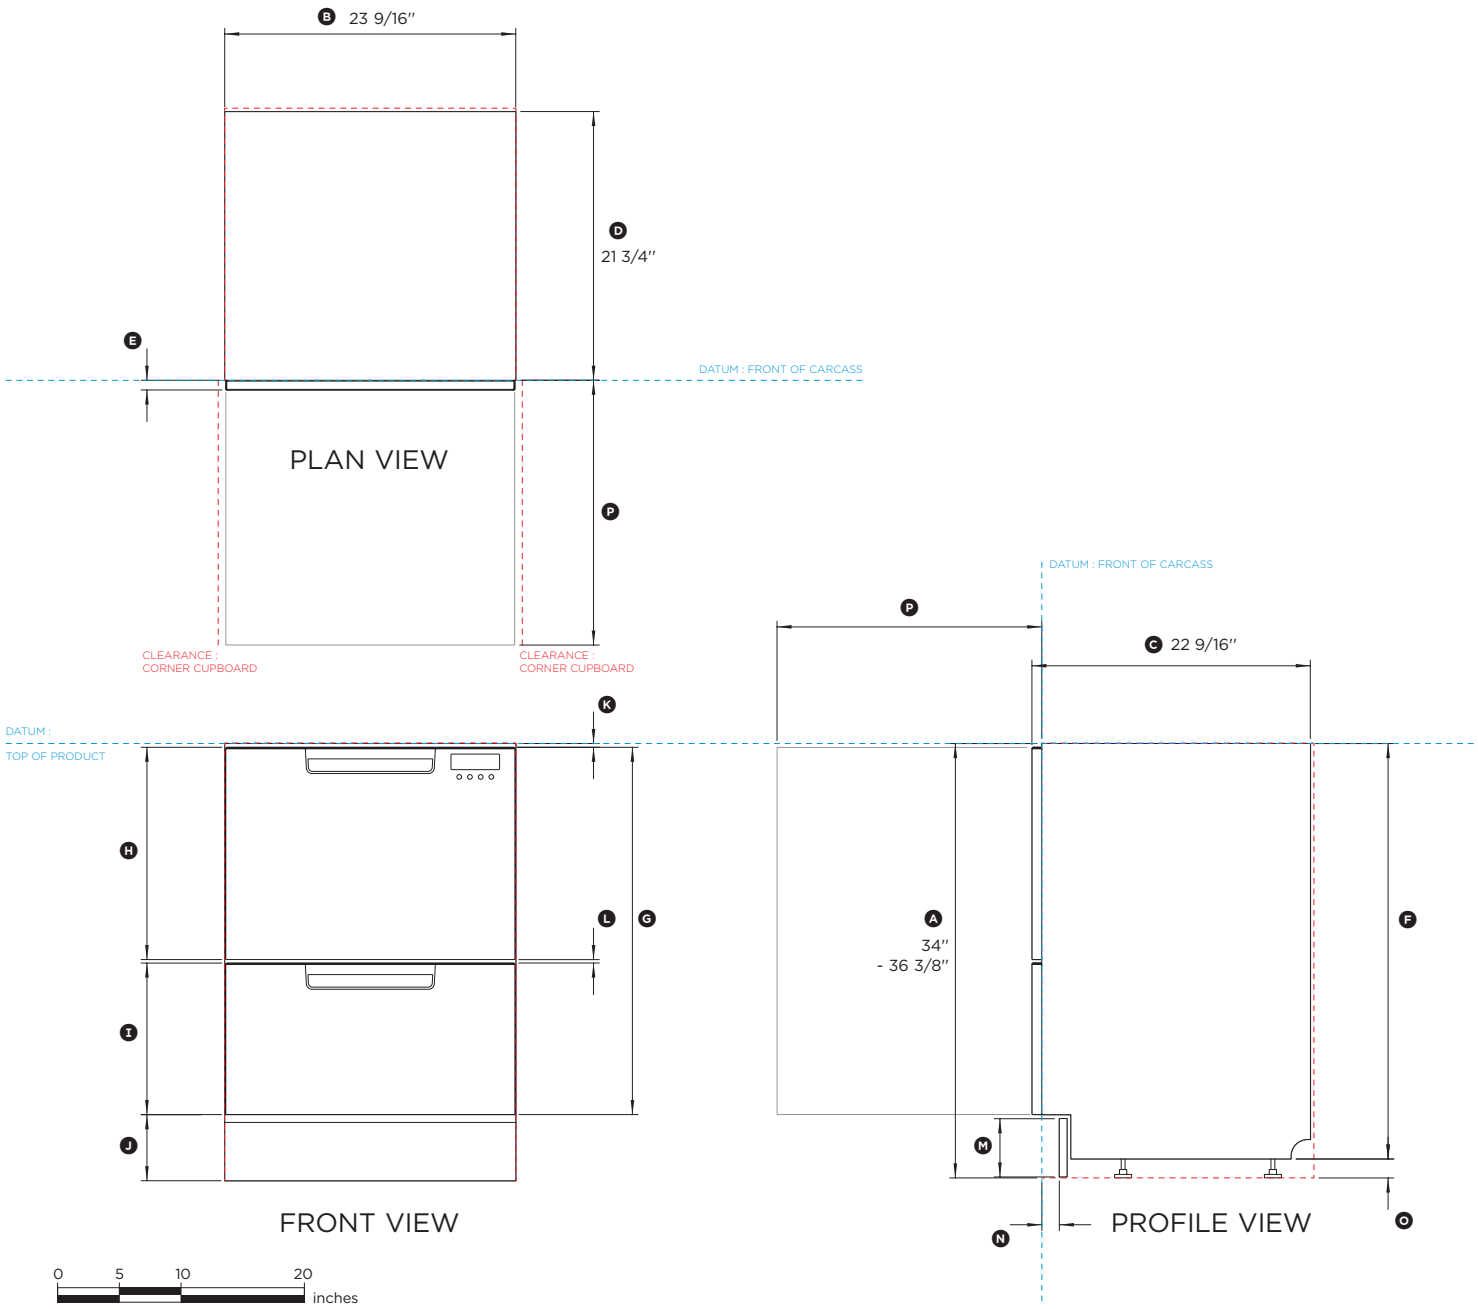

24″ DOUBLE DISHDRAWER™ TALL

Model no:
DD24DCTX9, DD24DCTHX9

(refer page 2 for metric measurements)

Dimensions	**in**
Ⓐ Overall height* of DishDrawer™	34″ - 36 3/8″
Ⓑ Overall width of DishDrawer™	23 9/16″
Ⓒ Overall depth of DishDrawer™	22 9/16″
Ⓓ Depth of chassis	21 3/4″
Ⓔ Depth of front panel	13/16″
Ⓕ Height of chassis	33 11/16″
Ⓖ Height of drawer fronts	29 3/4″
Ⓗ Height of upper front panel	17 3/16″
Ⓘ Height of lower front panel	12 1/4″
Ⓙ Height from floor to bottom of lower front panel	3 15/16″ - 6 5/16″
Ⓚ Height from top of front panel to top of chassis	5/16″
Ⓛ Ventilation gaps between panels	1/4″
Ⓜ Height of toekick panel	2 13/16″ - 5″
Ⓝ Depth of toekick recess	1 1/2″ - 4″
Ⓞ Height of adjustable levelling feet	3/8″ - 2 11/16″
Ⓟ Maximum extension of drawer from front datum	21 9/16″

* includes mounted feet

Minimum Clearances	**in**
Height of cavity	min 34″
Width of cavity	23 5/8″
Depth of cavity	min 22 1/16″
Minimum clearance from a corner cupboard	1/2″

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **07.09.2016**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16″). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit www.fisherpaykel.com

Fisher&Paykel

DATA SHEET

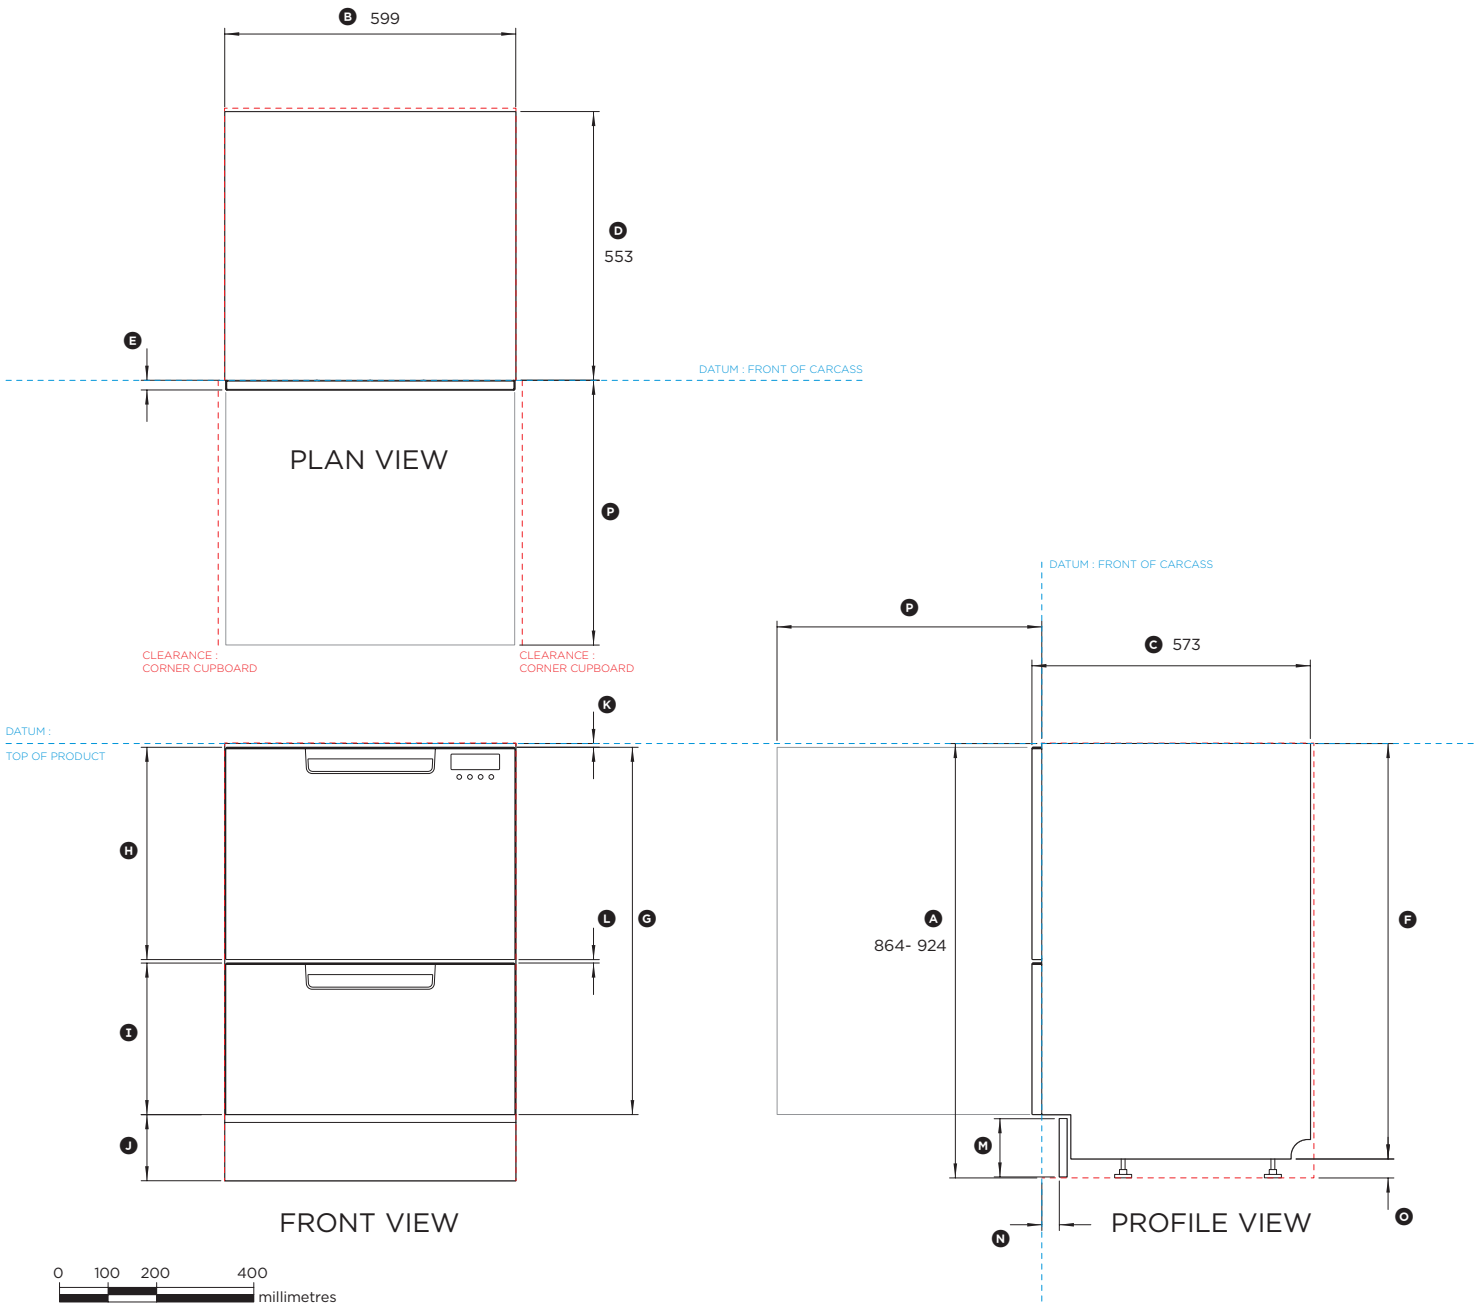

24" DOUBLE DISHDRAWER™ TALL

Model no:
DD24DCTX9, DD24DCTHX9

(refer page 1 for imperial measurements)

Dimensions	**mm**
Ⓐ Overall height* of DishDrawer™	864 - 924
Ⓑ Overall width of DishDrawer™	599
Ⓒ Overall depth of DishDrawer™	573
Ⓓ Depth of chassis	553
Ⓔ Depth of front panel	20
Ⓕ Height of chassis	855
Ⓖ Height of drawer fronts	756
Ⓗ Height of upper front panel	437
Ⓘ Height of lower front panel	312
Ⓙ Height from floor to bottom of lower front panel	100 - 160
Ⓚ Height from top of front panel to top of chassis	8
Ⓛ Ventilation gaps between panels	7
Ⓜ Height of toekick panel	72 - 127
Ⓝ Depth of toekick recess	38 - 102
Ⓞ Height of adjustable levelling feet	9 - 69
Ⓟ Maximum extension of drawer from front datum	547

* includes mounted feet

Minimum Clearances	**mm**
Height of cavity	min 864
Width of cavity	600
Depth of cavity	min 560
Minimum clearance from a corner cupboard	13

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **07.09.2016**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit www.fisherpaykel.com

Fisher&Paykel