FISHER & PAYKEL


DATA SHEET
36" Professional Drop In Gas Cooktop

Model no:
CDV2-365
(refer page 3 for metric measurements)


Product Dimensions	**in**
Ⓐ Height of chassis (below top of counter)	4"
Ⓑ Overall height of product (bottom of chassis to top of grates)	5 15/16"
Ⓒ Overall width of cooktop	36"
Ⓓ Overall depth of cooktop	21"
Ⓔ Height from countertop datum to top of cooking surface	1 15/16"
Ⓕ Height from countertop datum to top of dials	2 1/4"
Ⓖ Width of chassis	34 7/16"
Ⓗ Depth of chassis	19 3/8"
Ⓘ Distance from right edge of chassis to center line of gas inlet	2 3/4"
Ⓙ Distance from rear edge of chassis to center line of gas inlet	1 5/16"
Ⓚ Distance from right edge of chassis to center line of power cord	7/8"
Ⓛ Distance from rear edge of chassis to center line of power cord	13/16"

Cutout Dimensions	**in**
Overall width of cutout *	34 3/4"
Overall depth of cutout *	19 3/4"

* Note cutout position is centred to the cooktop width and depth.

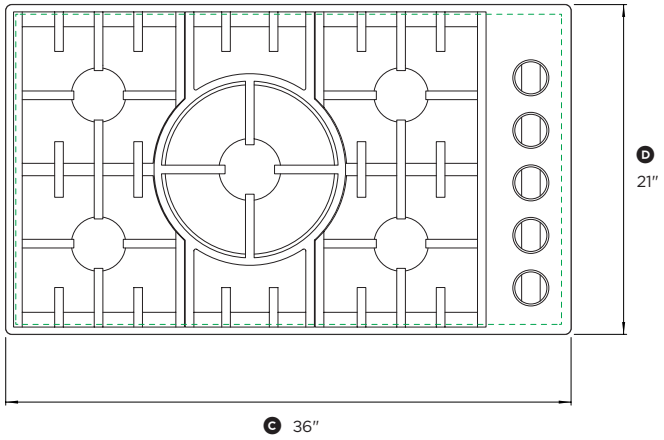


PLAN VIEW

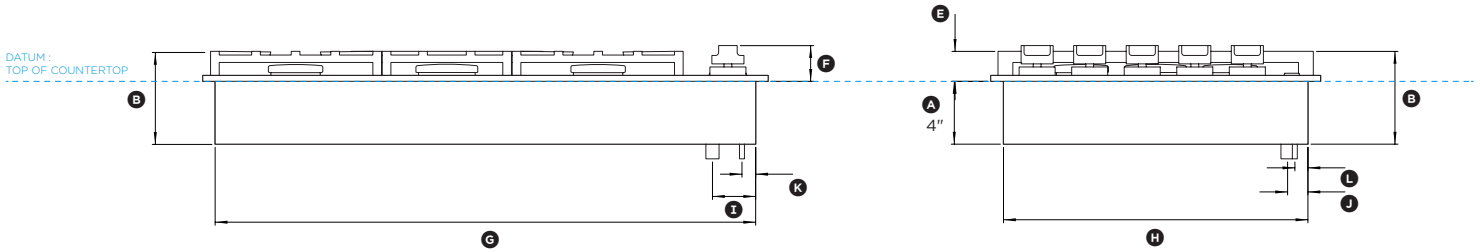

FRONT VIEW

PROFILE VIEW




INDICATES PRODUCT DATUM ----------
INDICATES CUTOUT ----------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
36″ Professional Drop In Gas Cooktop

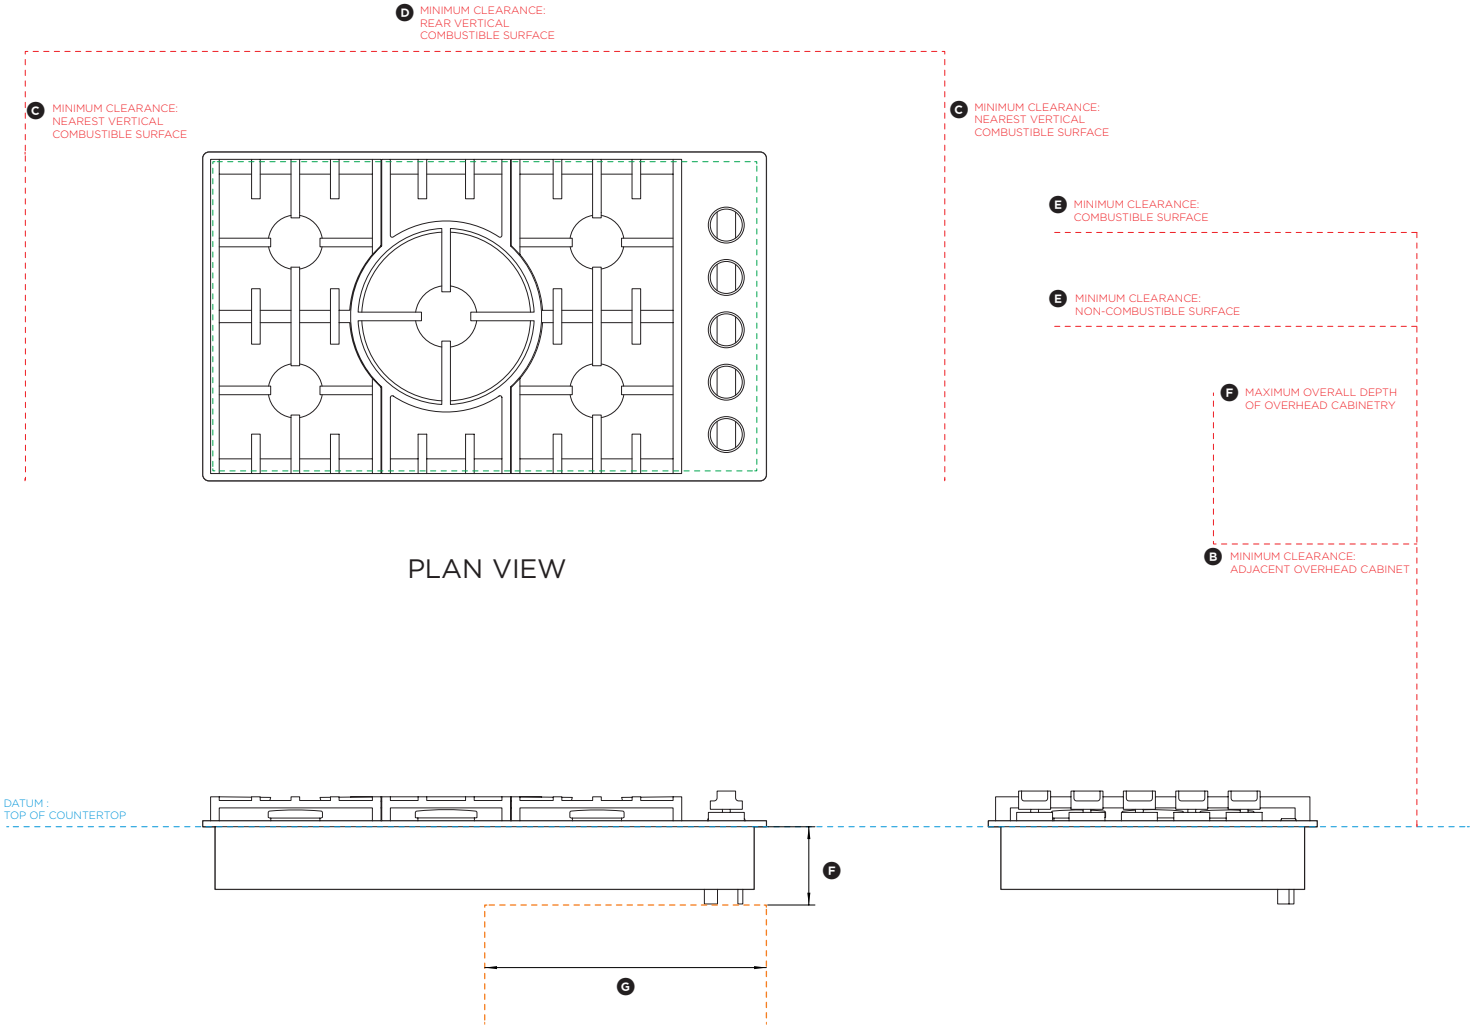

PLAN VIEW

FRONT VIEW

PROFILE VIEW

0 5 10 20 inches

Model no:
CDV2-365
(refer page 4 for metric measurements)

Clearance Dimensions	**in**
Ⓐ Minimum width of ventilation hood installed above cooktop – not shown*	36″
Ⓑ Minimum vertical distance between countertop and cabinet extending above counter	18″
Ⓒ Minimum clearance from left and right edge of cutout to nearest vertical combustible surface	12″
Ⓓ Minimum clearance from rear edge of cutout to nearest combustible surface	7″
Ⓔ Minimum clearance from cooking surface to:	
– combustible surface centered above the cooking surface	36″
– non-combustible surface centered above the cooking surface	30″
Ⓕ Maximum overall depth of overhead cabinetry	13″

Specifications	
Electrical	
Supply	120 VAC, 60Hz
Service	15 amp circuit
Gas – Natural	
Connection	1/2” NPT Minimum 5/8” dia. flex line
Supply Pressure	Supply Pressure: 6” to 9” W.C.
Gas – LP	
Connection	1/2” NPT Minimum 5/8” dia. flex line
Supply Pressure	11” to 14” W.C.

Location of Electrical and Gas Supply	**in**
Ⓕ Distance from benchtop to electrical and gas supply area	5″
Ⓖ Width of electrical and gas supply area	18″


INDICATES PRODUCT DATUM ----------
INDICATES CUTOUT ----------
INDICATES CLEARANCES ----------
INDICATES GAS AND ELCTRICAL SUPPLY AREA ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16″). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL


DATA SHEET
36" Professional Drop In Gas Cooktop

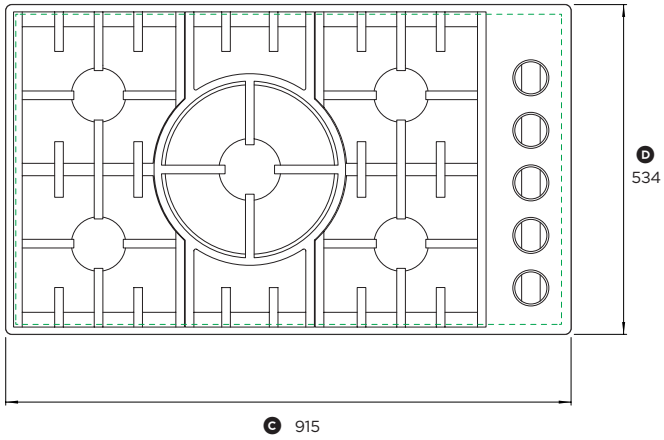

PLAN VIEW

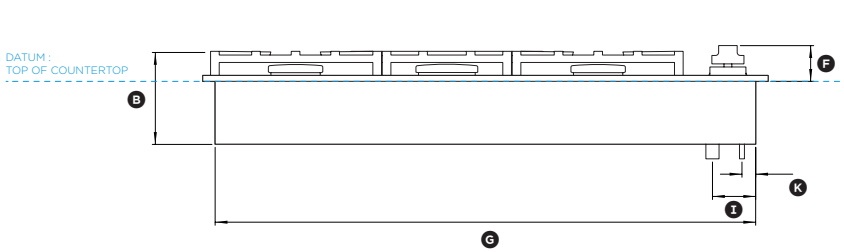

FRONT VIEW

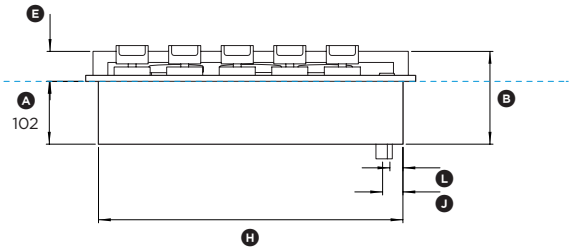

PROFILE VIEW



Model no:
CDV2-365
(refer page 1 for imperial measurements)

Product Dimensions	**mm**
(A) Height of chassis (below top of counter)	102
(B) Overall height of product (bottom of chassis to top of grates)	150
(C) Overall width of cooktop	915
(D) Overall depth of cooktop	534
(E) Height from countertop datum to top of cooking surface	49
(F) Height from countertop datum to top of dials	58
(G) Width of chassis	874
(H) Depth of chassis	493
(I) Distance from right edge of chassis to centre line of gas inlet	70
(J) Distance from rear edge of chassis to centre line of gas inlet	33
(K) Distance from right edge of chassis to centre line of power cord	22
(L) Distance from rear edge of chassis to centre line of power cord	21

Cutout Dimensions	**mm**
Overall width of cutout *	883
Overall depth of cutout *	502

* Note cutout position is centred to the cooktop width and depth.


INDICATES PRODUCT DATUM ----------
INDICATES CUTOUT ----------

DATE: **24.04.2018**


IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
36" Professional Drop In Gas Cooktop

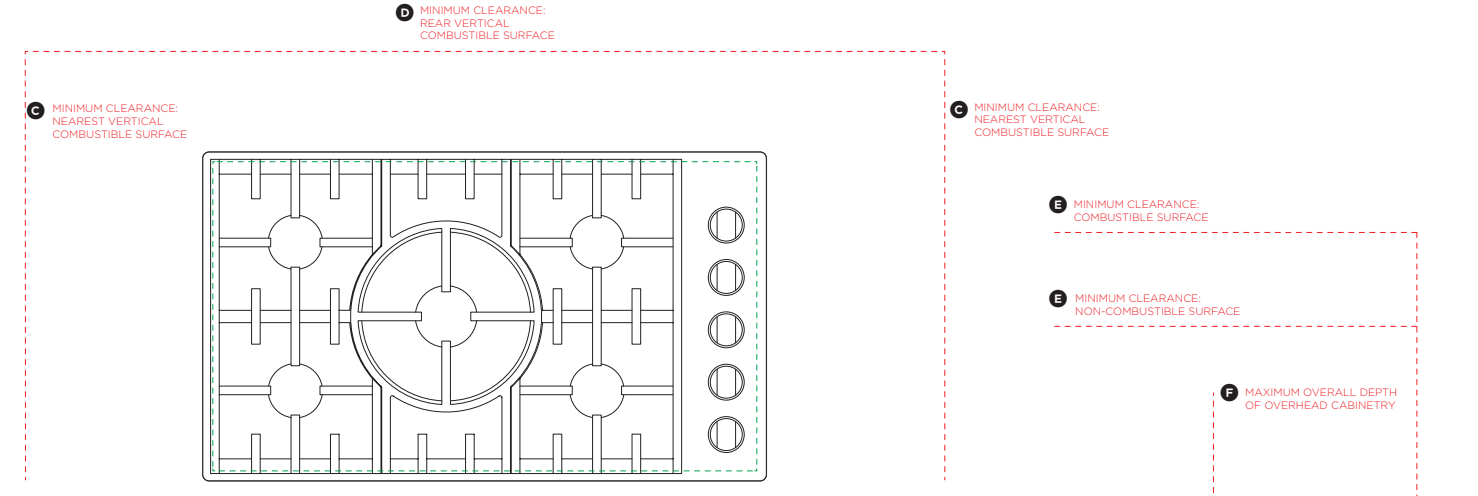

PLAN VIEW

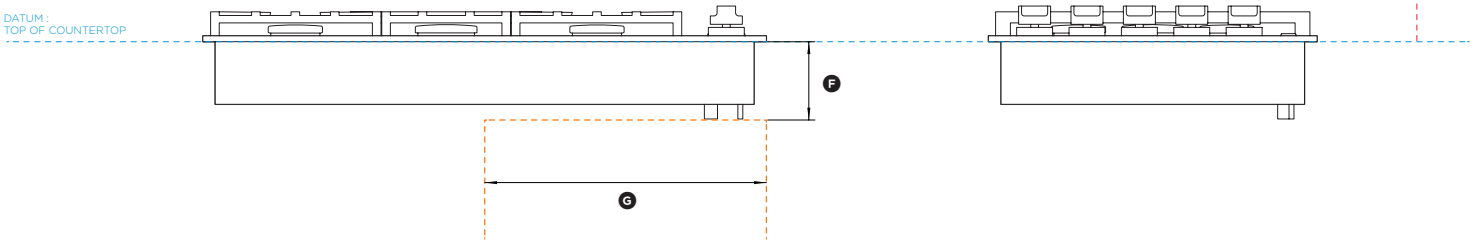

FRONT VIEW

PROFILE VIEW



Model no:
CDV2-365
(refer page 2 for imperial measurements)

Clearance Dimensions	**mm**
(A) Minimum width of ventilation hood installed above cooktop – not shown*	915
(B) Minimum vertical distance between countertop and cabinet extending above counter	457
(C) Minimum clearance from left and right edge of cutout to nearest vertical combustible surface	305
(D) Minimum clearance from rear edge of cutout to nearest combustible surface	178
(E) Minimum clearance from cooking surface to:	
– combustible surface centered above the cooking surface	915
– non-combustible surface centered above the cooking surface	762
(F) Maximum overall depth of overhead cabinetry	330

Specifications	
Electrical	
Supply	120 VAC, 60Hz
Service	15 amp circuit
Gas – Natural	
Connection	1/2" NPT Minimum 5/8" dia. flex line
Supply Pressure	Supply Pressure: 6" to 9" W.C.
Gas – LP	
Connection	1/2" NPT Minimum 5/8" dia. flex line
Supply Pressure	11" to 14" W.C.

Location of Electrical and Gas Supply	**mm**
(F) Distance from benchtop to electrical and gas supply area	127
(G) Width of electrical and gas supply area	457

INDICATES PRODUCT DATUM ----------
INDICATES CUTOUT ----------
INDICATES CLEARANCES ----------
INDICATES GAS AND ELCTRICAL SUPPLY AREA ----------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com