FISHER & PAYKEL

DATA SHEET
24" Single DishDrawer™ Tall

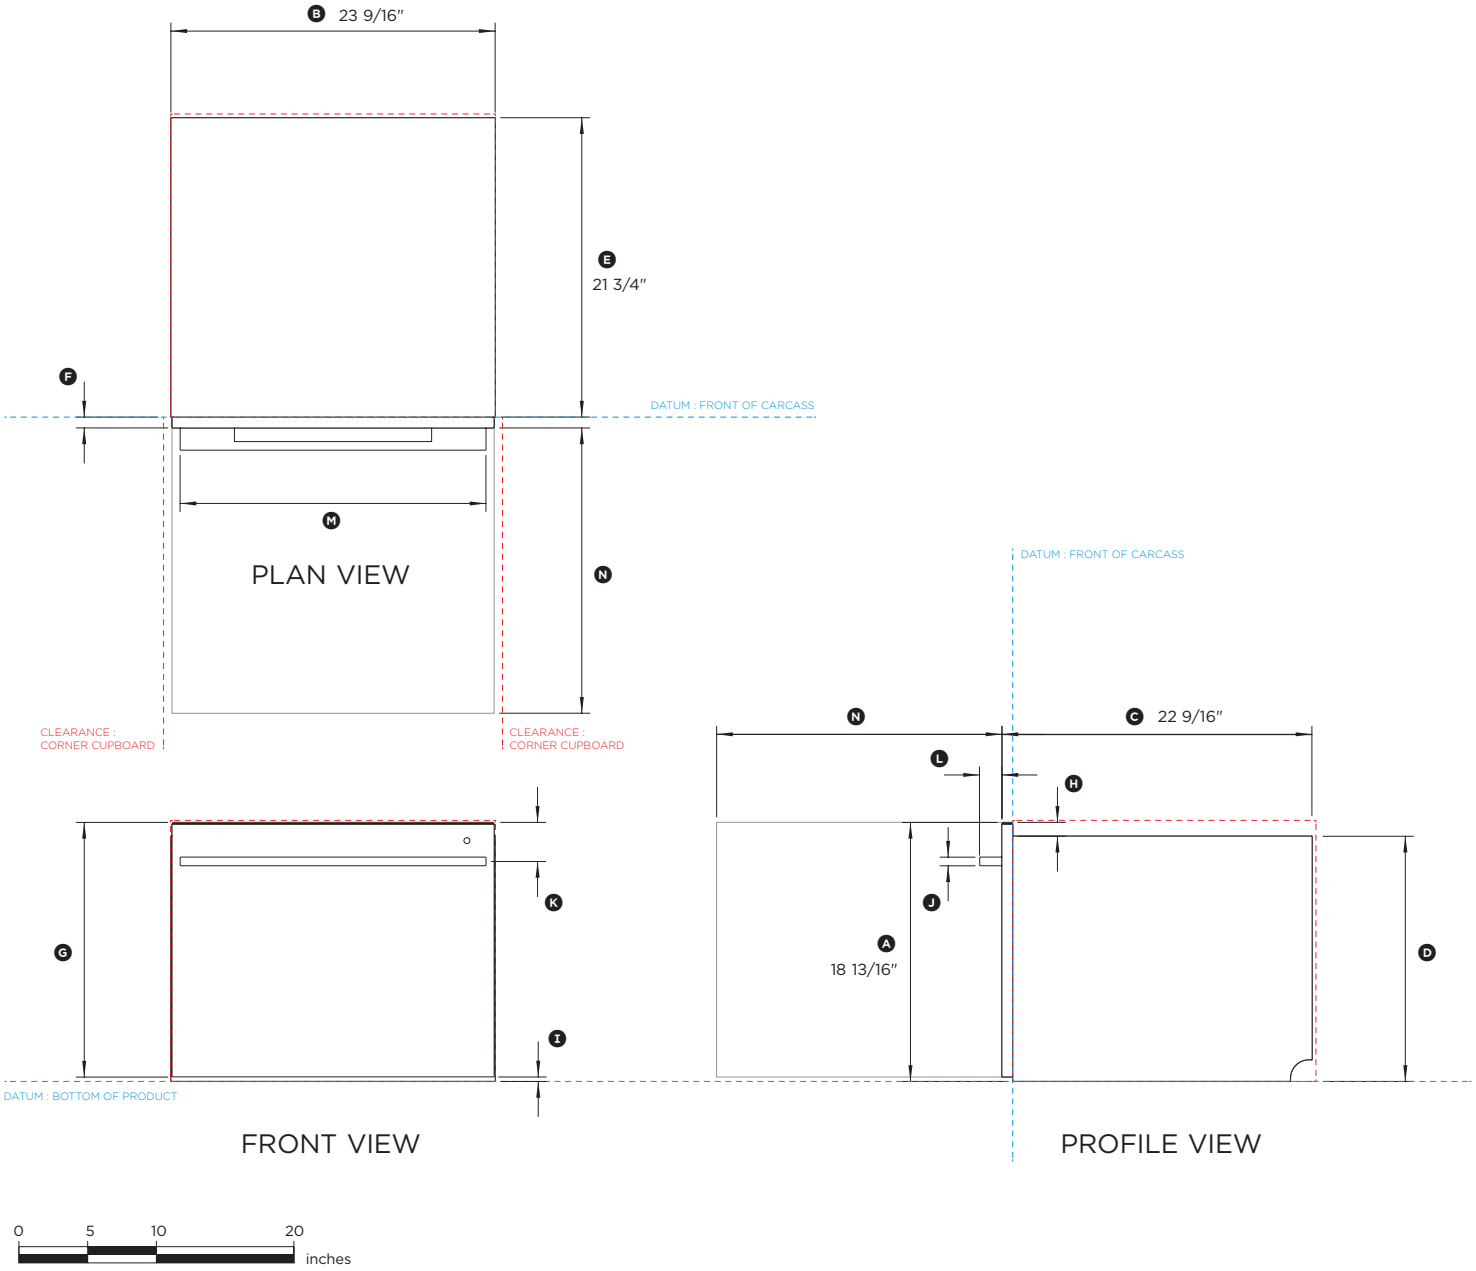

Model no:
DD24SDFTX9_N
(refer page 2 for metric measurements)

Dimensions	**in**
Ⓐ Overall height of DishDrawer™	18 13/16"
Ⓑ Overall width of DishDrawer™	23 9/16"
Ⓒ Overall depth of DishDrawer™ (excluding handle)	22 9/16"
Ⓓ Height of chassis	17 7/8"
Ⓔ Depth of chassis	21 3/4"
Ⓕ Depth of front panel	1 3/16"
Ⓖ Height of front panel	18 1/2"
Ⓗ Height from chassis to top of drawer panel	1"
Ⓘ Height of ventilation gap below front panel	5/16"
Ⓙ Thickness of handle	5/8"
Ⓚ Height from center of handle to top of front panel	2 13/16"
Ⓛ Depth of handle	1 5/8"
Ⓜ Width of handle	22 1/4"
Ⓝ Maximum extension of drawer from drawer front (excluding handle)	20 3/4"

Minimum Clearances	**in**
Minimum inside height of cavity	18 7/8"
Minimum inside width of cavity	23 5/8"
Minimum inside depth of cavity from front datum	22 1/16"
Minimum clearance from a corner cupboard	1/2"

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **28.05.2018**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET
24" Single DishDrawer™ Tall

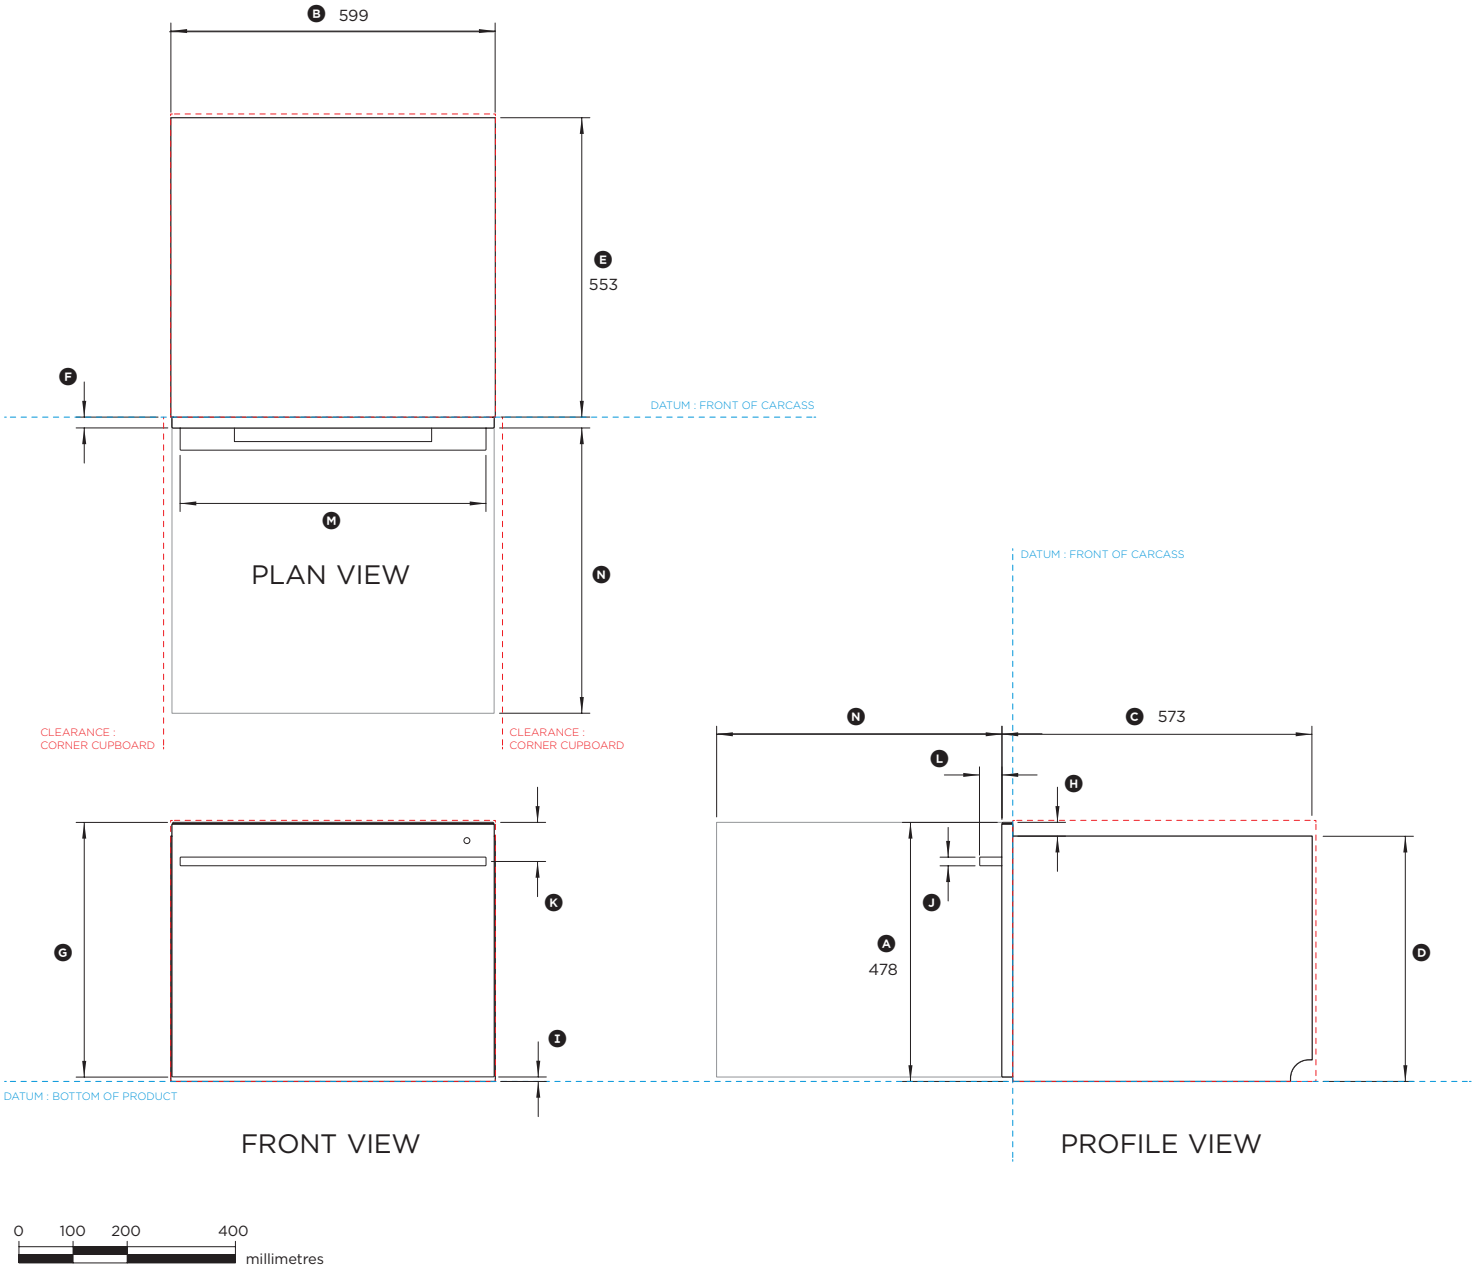

Model no:
DD24SDFTX9_N

(refer page 1 for imperial measurements)

Dimensions	**mm**
Ⓐ Overall height of DishDrawer™	478
Ⓑ Overall width of DishDrawer™	599
Ⓒ Overall depth of DishDrawer™ (excluding handle)	573
Ⓓ Height of chassis	454
Ⓔ Depth of chassis	553
Ⓕ Depth of front panel	20
Ⓖ Height of front panel	470
Ⓗ Height from chassis to top of drawer panel	26
Ⓘ Height of ventilation gap below front panel	8
Ⓙ Thickness of handle	16
Ⓚ Height from centre of handle to top of front panel	72
Ⓛ Depth of handle	41
Ⓜ Width of handle	565
Ⓝ Maximum extension of drawer from drawer front (excluding handle)	527

Minimum Clearances	**mm**
Minimum inside height of cavity	480
Minimum inside width of cavity	600
Minimum inside depth of cavity from front datum	560
Minimum clearance from a corner cupboard	13

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **28.05.2018**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com