
FISHER & PAYKEL

**DATA SHEET**
**Vacuum Seal Drawer, 30" - Contemporary style**

Model no:
**VB30SDEX1**
(refer page 2 for metric measurements)

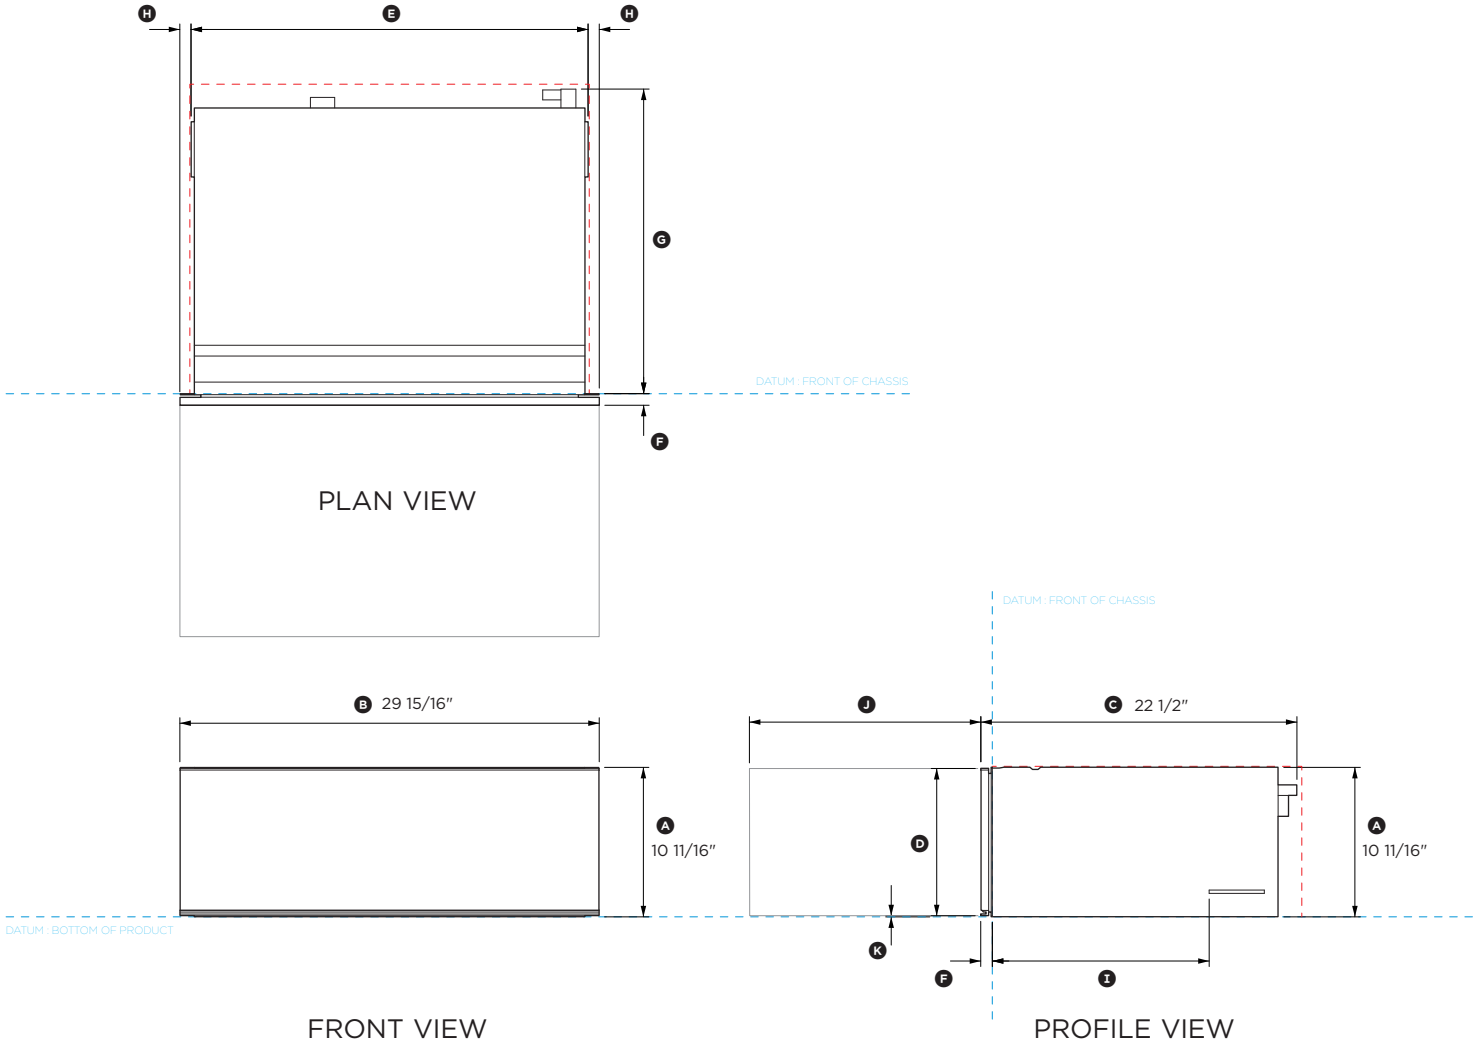


| Product Dimensions | in |
|---|---|
| Ⓐ Overall height of vacuum drawer | 10 11/16" |
| Ⓑ Overall width of vacuum drawer | 29 15/16" |
| Ⓒ Overall depth of drawer (includes front panel & power plug) | 22 1/2" |
| Ⓓ Height of drawer front panel | 10 1/2" |
| Ⓔ Width of chassis (includes side brackets) | 28 5/16" |
| Ⓕ Depth of drawer front panel and flange | 13/16" |
| Ⓖ Depth of chassis (includes power plug, excludes flange) | 21 11/16" |
| Ⓗ Distance from side bracket to side of drawer front | 13/16" |
| Ⓘ Distance from rear of flange to side bracket | 15 5/16" |
| Ⓙ Depth of open drawer (measured from front of drawer panel) | 16 1/2" |
| Ⓚ Height from bottom of chassis to bottom of front panel | 1/16" |

| Clearance Dimensions | in |
|---|---|
| Minimum inside height of cavity | 10 3/4" |
| Minimum inside width of cavity | 28 1/2" |
| Minimum inside depth of cavity | 22 1/16" |
| Overall width of cabinetry | 30 1/16" |
| Minimum clearance between top of front panel and upper cabinetry panel | 1/8" |
| Minimum clearance between bottom of front panel and lower cabinetry panel | 1/16" |

0 100 200 400 inches

INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------


DATE: **07.04.2021**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


# FISHER & PAYKEL

**DATA SHEET**
**Vacuum Seal Drawer, 30" - Contemporary style**

Model no:
**VB30SDEX1**
(refer page 1 for imperial measurements)

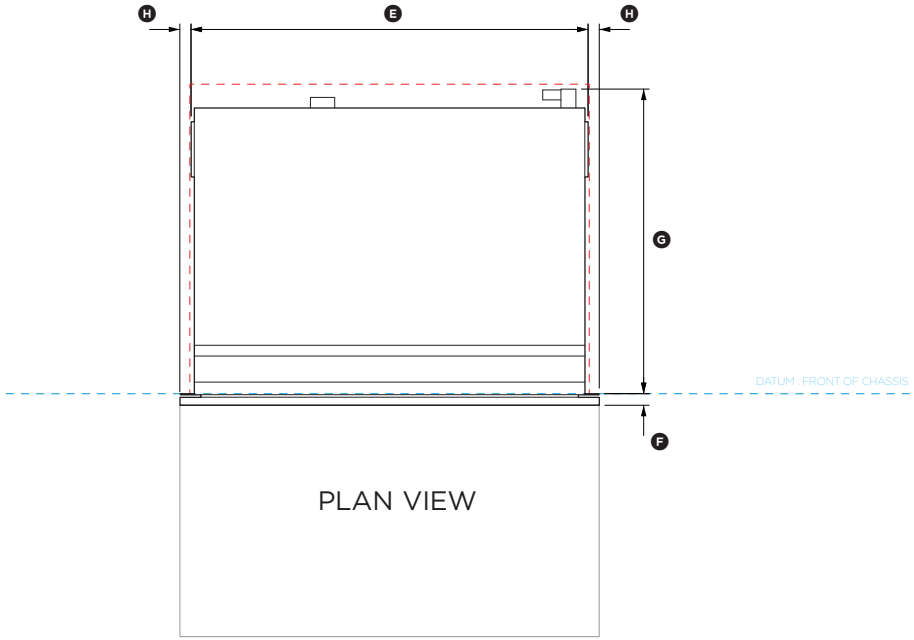


PLAN VIEW

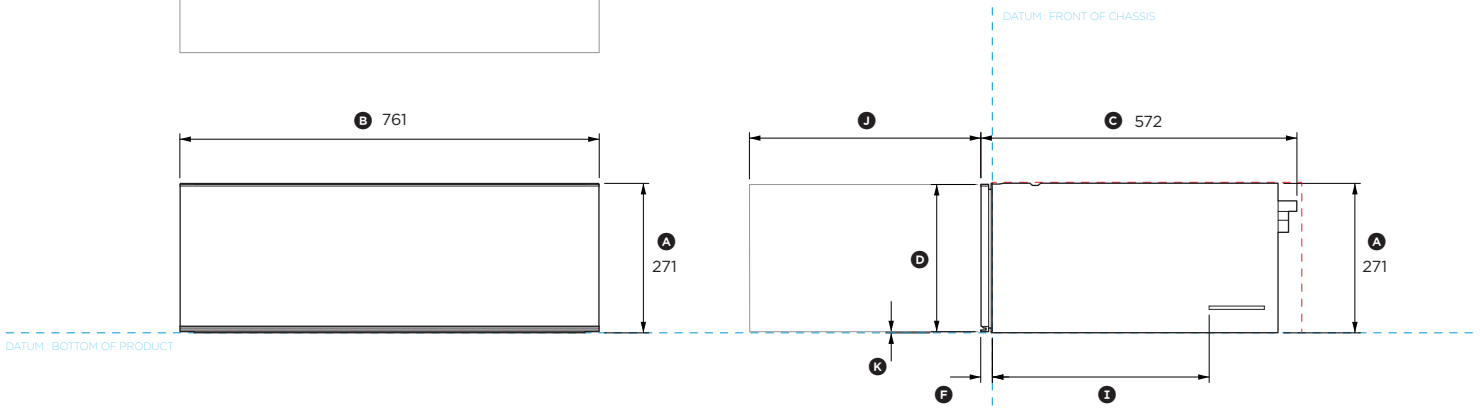


FRONT VIEW

PROFILE VIEW

| Product Dimensions | mm |
|---|---|
| Ⓐ Overall height of vacuum drawer | 271 |
| Ⓑ Overall width of vacuum drawer | 761 |
| Ⓒ Overall depth of drawer (includes front panel & power plug) | 571 |
| Ⓓ Height of drawer front panel | 267 |
| Ⓔ Width of chassis (includes side brackets) | 720 |
| Ⓕ Depth of drawer front panel and flange | 20 |
| Ⓖ Depth of chassis (includes power plug, excludes flange) | 551 |
| Ⓗ Distance from side bracket to side of drawer front | 20 |
| Ⓘ Distance from rear of flange to side bracket | 389 |
| Ⓙ Depth of open drawer (measured from front of drawer panel) | 419 |
| Ⓚ Height from bottom of chassis to bottom of front panel | 2 |

| Clearance Dimensions | mm |
|---|---|
| Minimum inside height of cavity | 273 |
| Minimum inside width of cavity | 724 |
| Minimum inside depth of cavity | 560 |
| Overall width of cabinetry | 764 |
| Minimum clearance between top of front panel and upper cabinetry panel | 3 |
| Minimum clearance between bottom of front panel and lower cabinetry panel | 2 |




INDICATES CABINETRY / PRODUCT DATUM ----------
INDICATES CABINETRY CLEARANCES ----------

DATE: **07.04.2021**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com