

30" Induction Freestanding Range

Induction Range

Available Products: ECFI3068AS

Available Colors: Stainless Steel

Version: 07/22

## Product Specifications

### Cooktop

| | |
|---|---|
| Bridge Element Location | Left |
| Cooking Surface Type | Smooth |
| Hot-Surface Indicator Light | Yes |

### Cooking Controls

| | |
|---|---|
| Bake | Yes |
| Bread Proof | Yes |
| Broil | Yes |
| Child Lock | Yes |
| Convection Bake | Yes |
| Convection Roast | Yes |
| Cook Time | Yes |
| Delay Start | Yes |
| Keep Warm | Yes |
| Kitchen Timer | Yes |
| Probe | Yes |
| Steam Clean | Yes |
| Temperature Display | Yes |

### Controls

| | |
|---|---|
| Sabbath Mode | Yes |

### Dimensions and Volume

| | |
|---|---|
| Width | 29.938" |
| Depth | 24 7/8" |
| Depth With Door 90° Open | 46.688" |
| Oven Interior Height | 17 1/4" |
| Oven Interior Width | 24 1/4" |
| Oven Interior Depth | 16" |
| Minimum Height | 35 3/8" |
| Maximum Height | 36 5/8" |
| Oven Capacity | 4.6 Cu. Ft. |

### Installation

| | |
|---|---|
| Power Cord Included | Yes |
| Adjustable Leveling Legs | Yes |
| Included Power Cord Type | 4-Prong Plug |

### Safety Certifications and Approvals

| | |
|---|---|
| UL Listed | Yes |
| cUL Listed | Yes |
| RoHS | Yes |

### Cooktop Performance

| | |
|---|---|
| Right Front Element Burner Size | 5 7/10" |
| Right Rear Element Burner Size | 8 3/10" |
| Left Front Element Burner Size | 7 1/10" |
| Left Rear Element Burner Size | 7 1/10" |
| Right Front Element Burner | 1,400 / 2,200 Watts (Boost) |
| Right Rear Element Burner | 2,300 / 3,700 Watts (Boost) |
| Left Front Element Burner | 1,850 / 3,000 Watts (Boost) |
| Left Rear Element Burner | 1,850 / 3,000 Watts (Boost) |

### Oven

| | |
|---|---|
| Bake Element Type | Hidden |
| Bake Element | 3,300 Watts |
| Broil Element | 3,300 Watts |
| Convection Type | True |
| Convection Element | 2,950 Watts |
| Rack Position Type | Ladder |
| Number of Rack Positions | 6 |
| Rack Type 1 | Flat |
| Rack Type 1 Quantity | 2 |
| Rack Type 2 | Glide |
| Rack Type 2 Quantity | 1 |
| Oven Interior Color | Gray |
| Window Type | Extra Large Window |
| Oven Light Type | Halogen |
| Oven Light Quantity | 2 |
| Oven Light Watts | 40 Watts |
| Number of Convection Fans | 1 |

### Display

| | |
|---|---|
| Display Type | LED |
| Control Location | Front |

### Electrical Specifications

| | |
|---|---|
| Amps @ 240 Volts | 40 Amps |
| Connected Load @ 240V | 11 kW |
| Voltage Rating | 240 V |

We reserve the right to change specifications or discontinue models without notice.
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electrolux.com/en
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electrolux.ca

| | |
|---|---|
| 30" Induction Freestanding Range | Induction Range |
| Available Products: ECFI3068AS | Available Colors: Stainless Steel |
| Version: 07/22 | |

## General Specifications


| | |
|---|---|
| Prop 65 Label | Yes |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

We reserve the right to change specifications or discontinue models without notice.
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electrolux.com/en
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electrolux.ca

| | |
|---|---|
| 30" Induction Freestanding Range | Induction Range |
| Available Products: ECFI3068AS | Available Colors: Stainless Steel |
| Version: 07/22 | |

## Installation Diagram

### Cabinet clearances

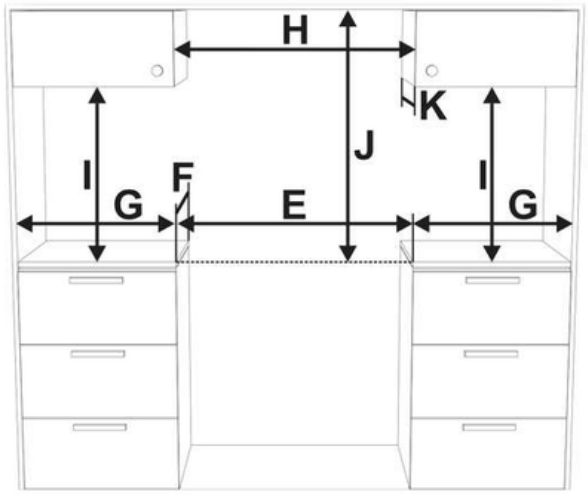



| | | |
|---|---|---|
| E | 762 mm | 30” |
| F | 603 mm | 23” 3/4 |
| G | 178 mm | 7” |
| H | min. 762 mm | min. 30” |
| I | min. 457 mm | min. 18” |
| J | see notes below | |
| K | max. 330 mm | max. 13” |

Clearance **J** can have the following values:

- **J = 30” / 762 mm** minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet.
- **J = 24” / 610 mm** minimum when the bottom of wood or metal cabinet is protected by not less than 1/4-inch-thick flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015-inch-thick stainless steel, 0.024-inch-thick aluminum, or 0.020-inch-thick copper. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 30" should be approved by the local codes and/or by the local authority having jurisdiction.

### Product Dimensions

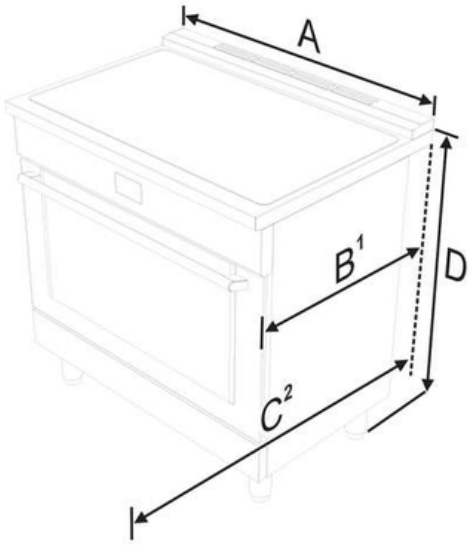


| | | |
|---|---|---|
| A | 760 mm | 29 15/16” |
| B[1] | min: 627 mm<br>max: 631 mm | min: 24 11/16”<br>max: 24 13/16” |
| C[2] | 1186 mm | 46 11/16” |
| D | min: 898 mm<br>max: 930 mm | min: 35 6/16”<br>max: 36 5/8” |

1. Measurement **B** varies according to the model: the minimum is obtained without the rear spacers (see "Island installation") and the maximum is obtained for traditional installation (slot-in installation - with the rear spacers).
2. Measurement **C** refers to the open door.

We reserve the right to change specifications or discontinue models without notice.
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electrolux.com/en
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electrolux.ca