# XOU24WDZGOA

24” UNIVERSAL DUAL-ZONE WINE COOLER
ADA COMPLIANT

## LIFESTYLE REFRIGERATION





**XOU24WDZGOA**

- Fits US / European / ADA
- Articulating Hinge
- Handleless
- Adapts for European Toe Kicks/ Plinth

24” UNDERCOUNTER WINE COOLER with OVERLAY FRAME DOOR

The ALL PURPOSE UNIT. With soft closing, reversible articulated hinges - the GOA units provide a perfectly integrated look whether you are installing under ADA or Standard height counters, using American or European style cabinetry, and can accommodate a 3, 4 or 6 inch toekick.

The XO GOA system is truly your all purpose undercounter solution.


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

# XOU24WDZGOA

## 24” UNDERCOUNTER DUAL-ZONE WINE COOLER

Unit Has Field Reversible Door

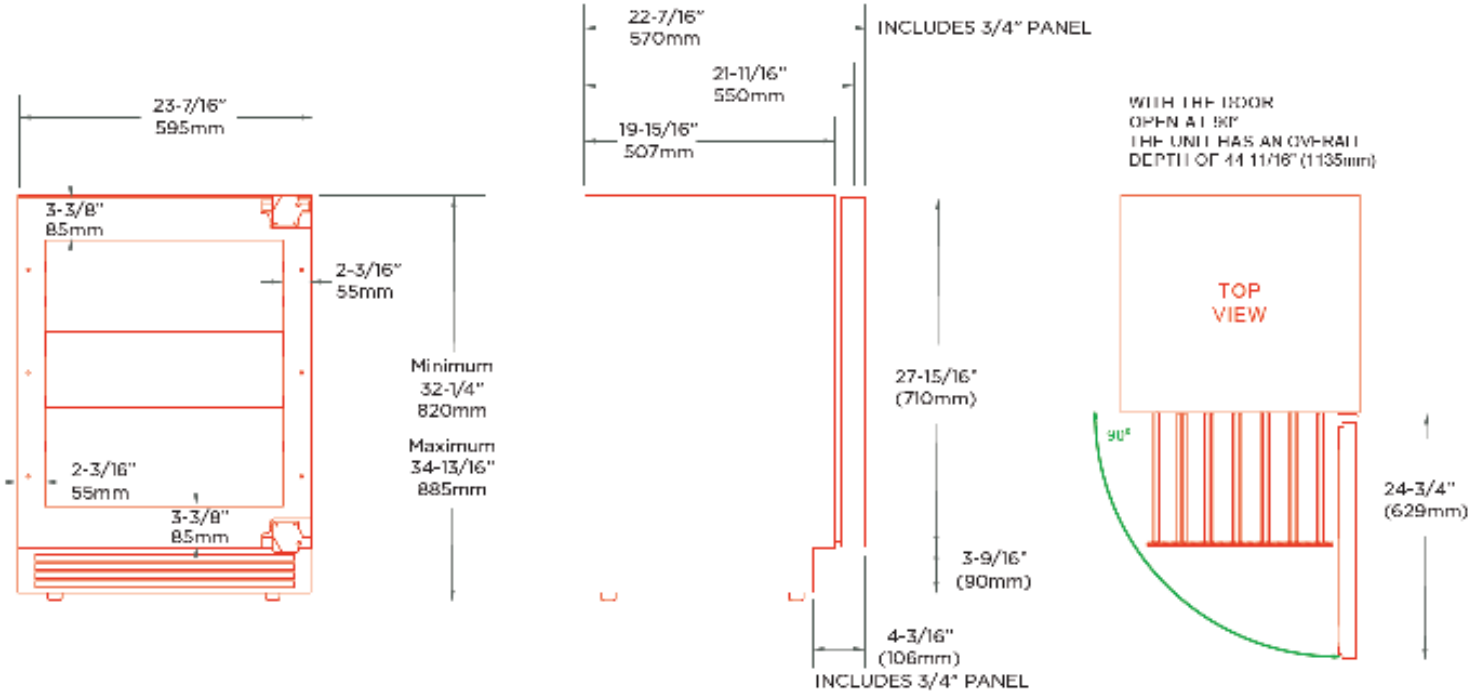


## ROUGH IN

## SPECIFICATIONS

### CAPACITY

Full extension smooth glide racks hold:
(12) 750ml bottles upper section at 41° to 50° F
(21) 750ml bottles lower section at 50° to 64° F

### FEATURES

- Articulated hinges for seamless integration
- Soft closing, field reversible door
- Library quiet 39 dBA operation
- Elegant tri-color interior illumination
- True seamless cabinet integration
- Intuative digital touch controls
- 6 1/2’ power cord with low profile 90 flat plug
- Low E Glass blocks harmful UV light
- Alarm Functions
- Energy Saver and Sabbath Mode

* Note: zero clearance hinges are visible just above and below the door panel

| | |
|---|---|
| **ELECTRICAL** | 120V 60HZ 4.35 AMP* |
| **DIMENSIONS** | H 32 1/4”min - 34 13/16“ max<br>W 23 7/16”<br>D 21 11/16” (w/o finish panel) |
| **ROUGH IN** | H 32 1/2“ min<br>W 24”<br>D 24” |
| **REFRIGERANT** | R600A |
| **OPTIONAL** | SS Door Panel for ADA Installs (includes 2 different handles) P/N: XOU24ADASG |

ADA COMPLIANT

FOR COMMERCIAL OR RESIDENTIAL USE

XO

C US

XO the next level in luxury appliances


xoapplliance.com 800.866.8300

XO is exclusively distributed by EASTERN MARKETING CORP.
24 Eisenhower Parkway Roseland, NJ 07068

# XOU24WDZGOA

## ADA INSTALLS


### ROUGH IN DIMENSIONS

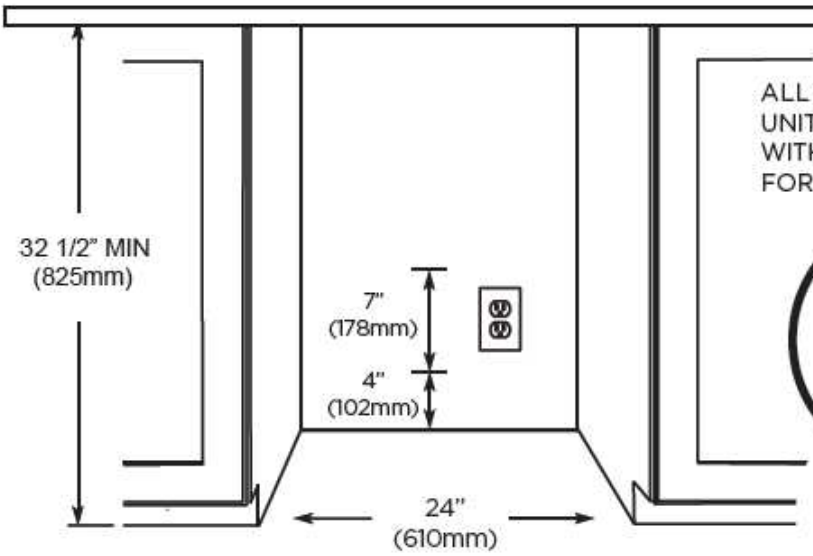



ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE




### OVERLAY FRAME DIMENSIONS

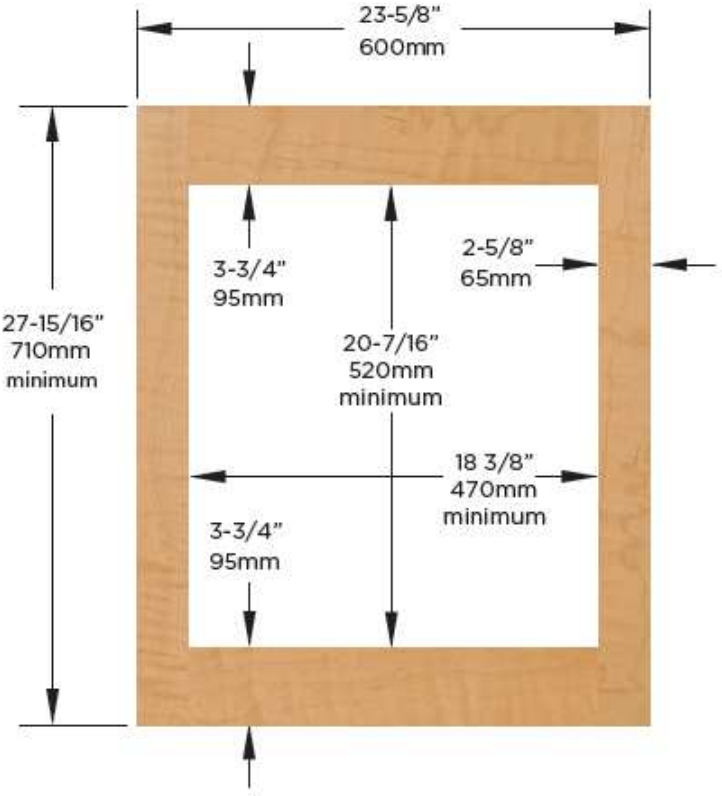


To conceal door completely observe the frame dimensions as minimums.

You can extend panel height but the gap between the bottom of the door and the floor must be at least 3" for ventilation.

To reduce possibility of warping - overlay frame should be finished on all sides.

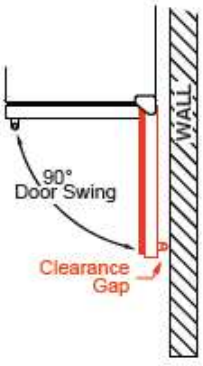


WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.


THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.

# XOU24WDZGOA

## FULL HEIGHT

### ROUGH IN DIMENSIONS

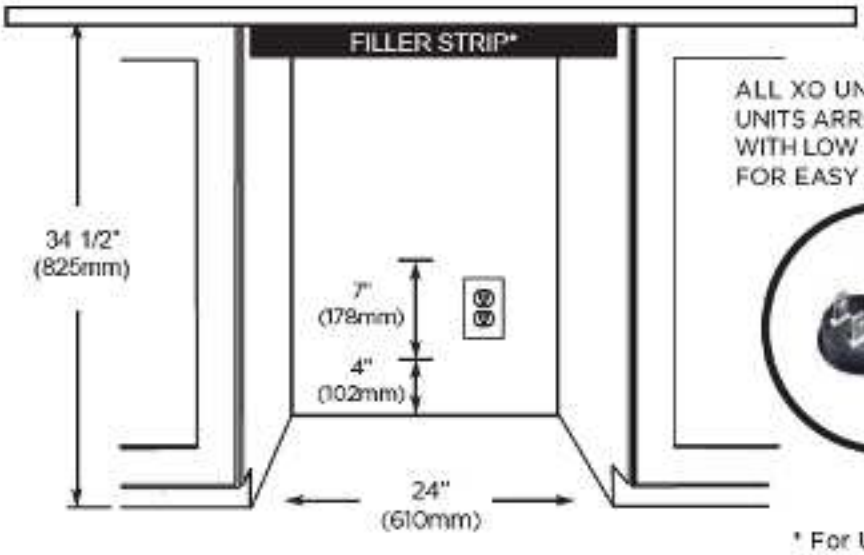


ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION




NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE



* For US cabinets, use a filler strip to close the gap above the unit behind the door (an ell bracket is included)
For European cabinets with a 6" toekick, raise the unit by 2" using the leveling legs and install a custom plinth leaving an open space for ventilation (consult manual)

### OVERLAY FRAME DIMENSIONS

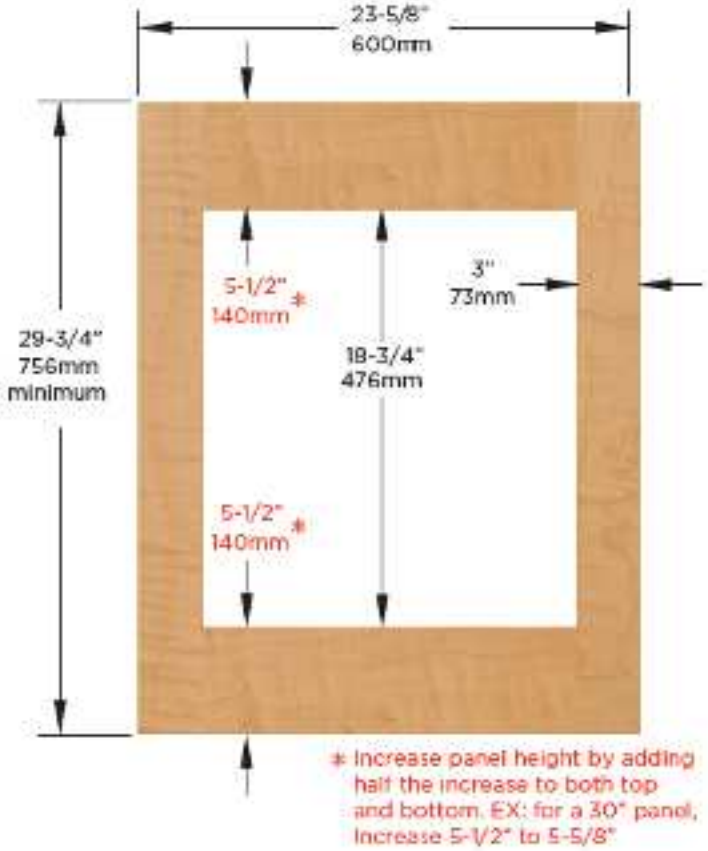



* Increase panel height by adding half the increase to both top and bottom. EX: for a 30" panel, increase 5-1/2" to 5-5/8"

To conceal door completely observe the frame dimensions as minimums.

You can change panel height but the gap between the bottom of the door and the floor must be at least 3" for ventilation.

To reduce possibility of warping - overlay frame should be finished on all sides.

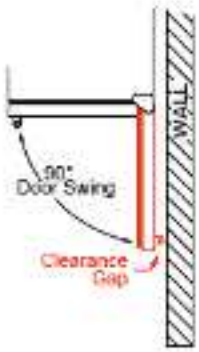


WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.