XOI22SC
XOI28SC

INSERT

HOW BEAUTIFUL KITCHENS BREATHE





XOI_SC

- Electronic 3 Speed Control + Power Boost
- Code Compliance Control - 395 or 600 CFM
- Optional ADA Compliant Remote Control
- 5 Minute delay function

DESIGNED AND CRAFTED IN ITALY

The center panel of the XOI22/28S provides more than a sleek European appearance, tangential blower and integral sound reduction design minimize background noise.

At XO, we believe that a good design is something everyone can afford


WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES


OUR LASTING COMMITMENT TO YOU





XOI22SC (DETAIL)

INSERT

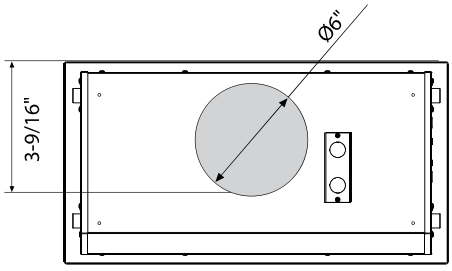

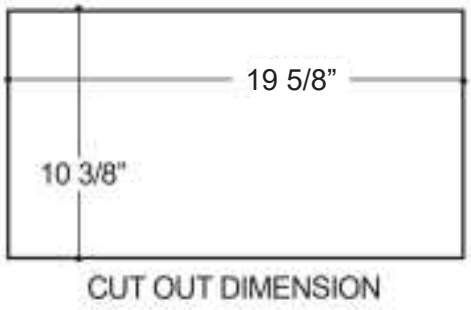

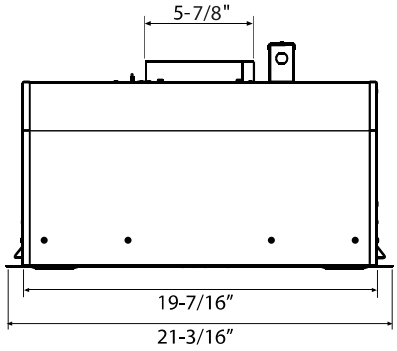

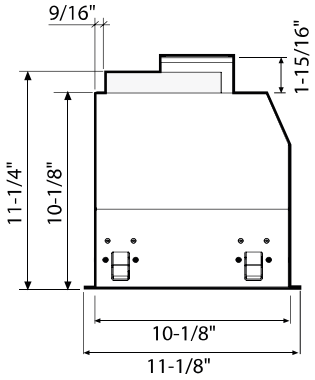

DESIGNED & CRAFTED IN ITALY

FEATURES

FINISH

Stainless Steel

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC Code Compliance Control - 395 or 600 CFM
- Optional ADA Compliant Remote Control
- High Efficiency 3000k LED lights (x2)
- Perimeter Aspiration / Quieter / More Powerful
- Dishwasher Safe Aluminum Mesh Filters
- 5 Minute Delay Shutoff Timer
- 6" Vertical Duct or Recirculating (Kit Sold Separately)
  (Filtered, recirculated air must be returned to the living space)
- Made In Italy

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5

SPECIFICATIONS

ELECTRICAL 120V 60HZ 6.2 AMP

DIMENSIONS

21-3/16" W x 11 1/8"D x 12 1/16"H

CUTOUT DIMENSIONS

19-5/8" x 10 3/8"

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Recirculation Kit	**XORFK12**
Recirculation Filters	**XORFRND**
ADA Compatible Remote	**XOVREMOTE1**
Make Up Air Kit (6")	**XOMA06**

XO the next level in luxury appliances


xoappliance.com | 800.966.8300


UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068


XOI28SC (DETAIL)


INSERT

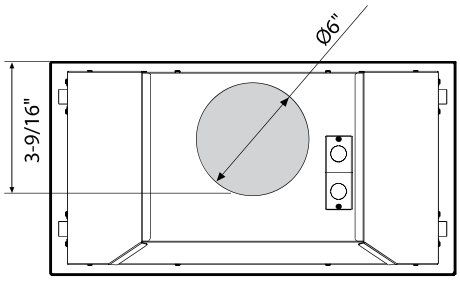

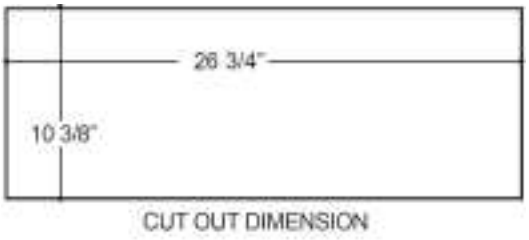

CUT OUT DIMENSION

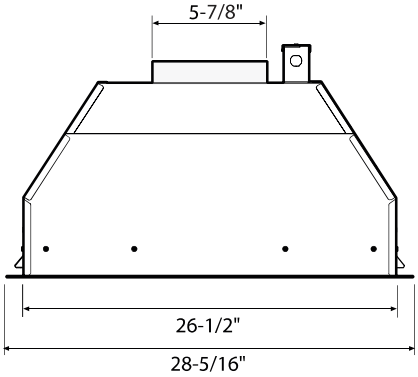

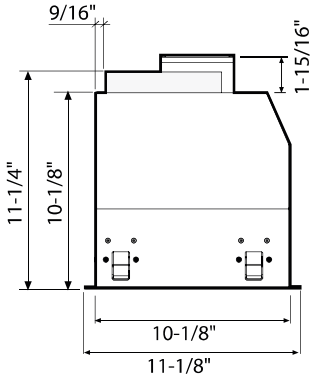

DESIGNED & CRAFTED IN ITALY

FEATURES

FINISH

Stainless Steel

FEATURES

- Electronic 3 Speed Control + Power Boost
- CCC Code Compliance Control - 395 or 600 CFM
- Wireless ADA Compliant Remote Control
- High Efficiency Dimmable 3000K LED lights (x2)
- Dishwasher Safe Aluminum Mesh Filters
- 6" Vertical Duct or Recirculating (Kit Sold Separately)
  (Recirculated air must be returned to the living space)
- 5 Minute Delay Shutoff Timer
- Made In Italy

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5

SPECIFICATIONS

ELECTRICAL 120V 60HZ 6.2 AMP

DIMENSIONS

28 5/16"W x 11 1/8"D x 12 1/16"H

CUTOUT DIMENSIONS

26-3/4" x 10 3/8"

OPTIONS

Recirculation Kit	**XORFK12**
Recirculation Filters	**XORFRND**
ADA Compatible Remote	**XOVREMOTE1**
30" Adjustable SS Liner	**XOLINER30**
36" Adjustable SS Liner	**XOLINER36**
Make Up Air Kit (6")	**XOMA06**

XO the next level in luxury appliances

xoappliance.com | 800.966.8300

UL LISTED

XO is exclusively distributed by
EASTERN MARKETING CORP.
24 Eisenhower Parkway
Roseland, NJ 07068

XOI22SC
XOI28SC

INSERT

RECOMMENDED MOUNTING HEIGHT


All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.



THESE MODELS HAVE A 6" DIAMETER EXHAUST DUCT WHICH MAY BE CONFIGURED FOR TOP OR REAR DISCHARGE - CONSULT MANUAL FOR ADDITIONAL INFORMATION.

RECIRCULATION

These XOI models may be installed with an optional recirculation kit when venting outside is not practical. When used in recirculation mode the filtered exhaust must be ducted back into the living space. Never discharge the exhaust into a confined space such as a soffit, attic, garage, crawl space or the voids between walls.

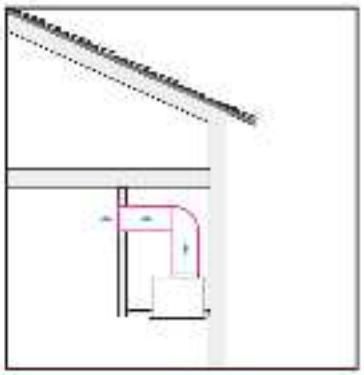

HOW DOES CODE COMPLIANCE CONTROL HELP -

CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. Your XO Hood is set to operate at 600 CFM maximum at the factory.

Re-programing is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

Re-programming also disables the Power Boost function. After conversion, the installer affixes a label stating the unit has been converted to 395 CFM max. Once done, the unit cannot be changed back.

If your application calls for a make-up air solution, XO gives you more choices.