

## NEWPORT BATH

### BP ROUGH VALVE

### Features

Solid brass construction  
Provides anti-scald protection and temperature regulation  
Pressure-balance technology maintains water temp within +/- 2 degrees Fahrenheit  
High-temperature safety stop ensures water temperature stays below max setting  
Hot and cold inlet stops ensure easy cartridge access  
Integral pull-style diverter with automatic reset  
1-1/16" functional depth (center-back) enables back-to-back installation  
Maximum handle rotational requirement of 150 degrees to achieve max temp setting  
Requires Newport Brass BP Valve Trim (sold-separately)


# 1-685



### Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1-18  
IAPMO/cUPC  
IPC  
ASSE 1016/ASME A112.1016  
All applicable US Federal and State material regulations

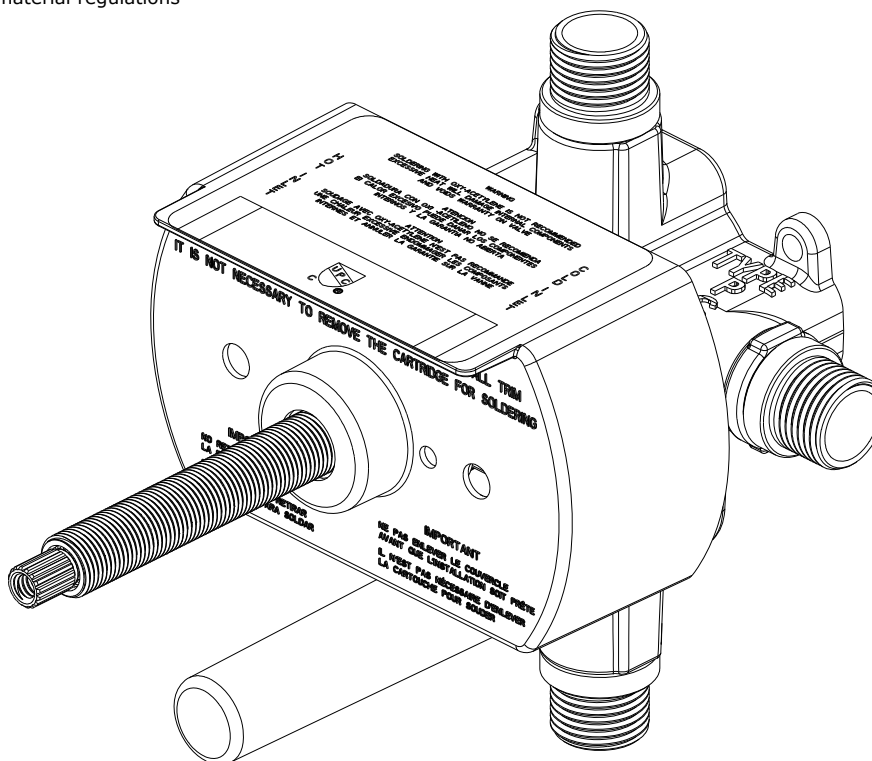

# 1-685

## PRODUCT DIMENSIONS (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

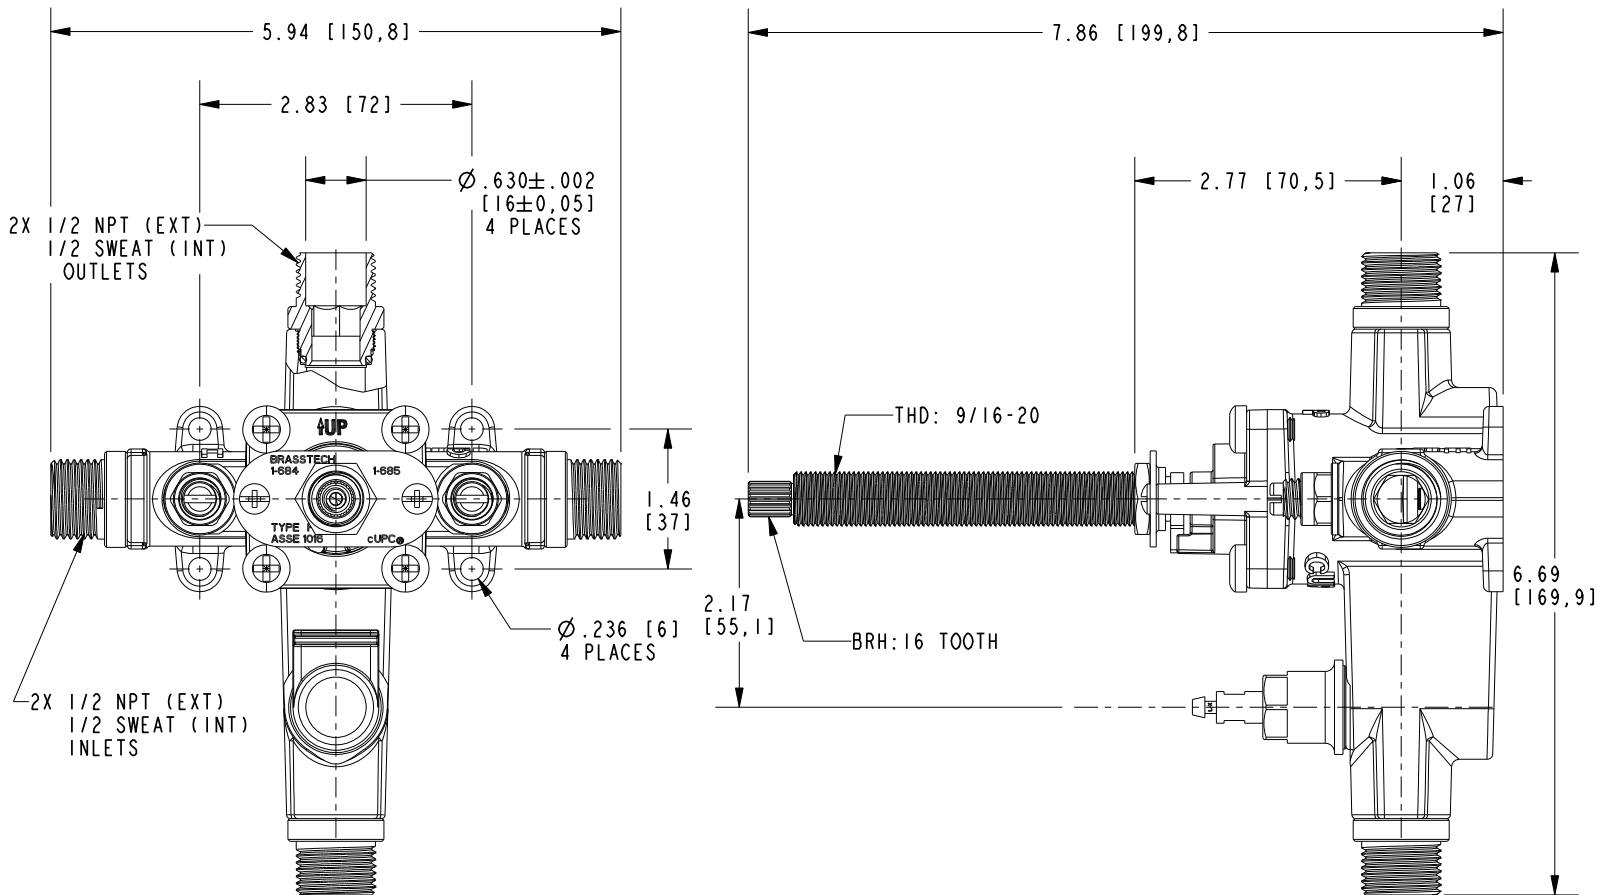

(MUD COVER HIDDEN IN ALL VIEWS)

BP ROUGH VALVE

1-685

Page 2 of 2

EN- 5038

REV H

**NEWPORT BRASS**  
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | [www.newportbrass.com](http://www.newportbrass.com)  
©2025 NewportBrass