

NEWPORT BATH

BP ROUGH VALVE

Features

Solid brass construction
Provides anti-scald protection and temperature regulation
Pressure-balancing technology maintains water temp. +/- 2 degrees Fahrenheit
High-temperature safety stop ensures water temp. stays below maximum setting
Integral hot and cold inlet stops ensure easy cartridge access
1-1/16" functional depth (center-back) enables back-to-back installation
Max handle rotational requirement of 150 degrees to achieve max temp setting


1-684



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1-18
IAPMO/cUPC
IPC
ASSE 1016/ASME A112.1016
All applicable US Federal and State material regulations

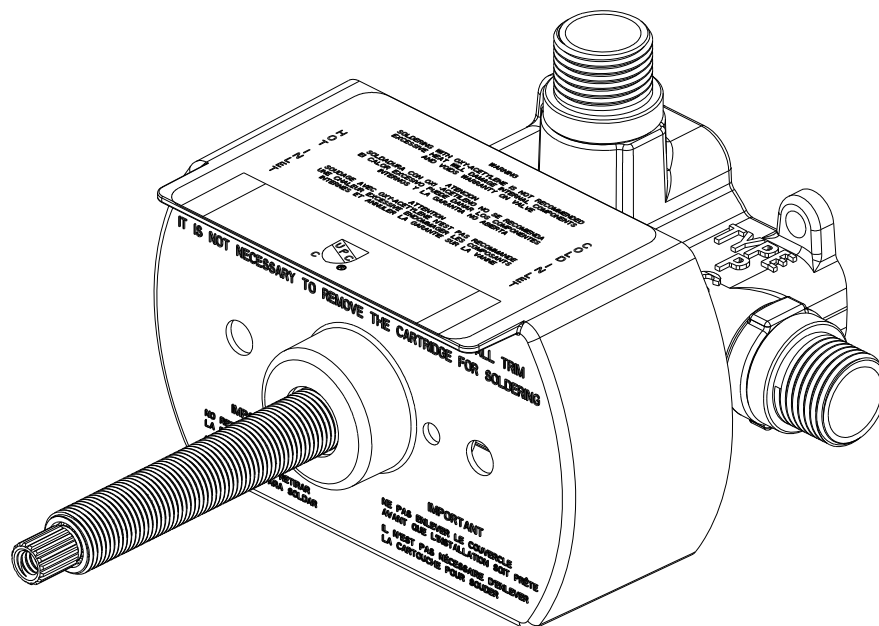

PRODUCT DIMENSIONS *(Units are in inches)*

5.94 [150,8]

2.97 [75,4]

Ø.630 ±.002
[16 ± 0,05]
3 PLACES

1/2 NPT (EXT)
1/2 SWEAT (INT)
OUTLET

3.50 [88,9]

4UP

BRASSTECH
1-684 1-885


TYPE ASSE 1015 cUPC

2.83 [72]

1.46 [37]

2X 1/2
1/2
INL

Ø.236 [6]
4 PLACES

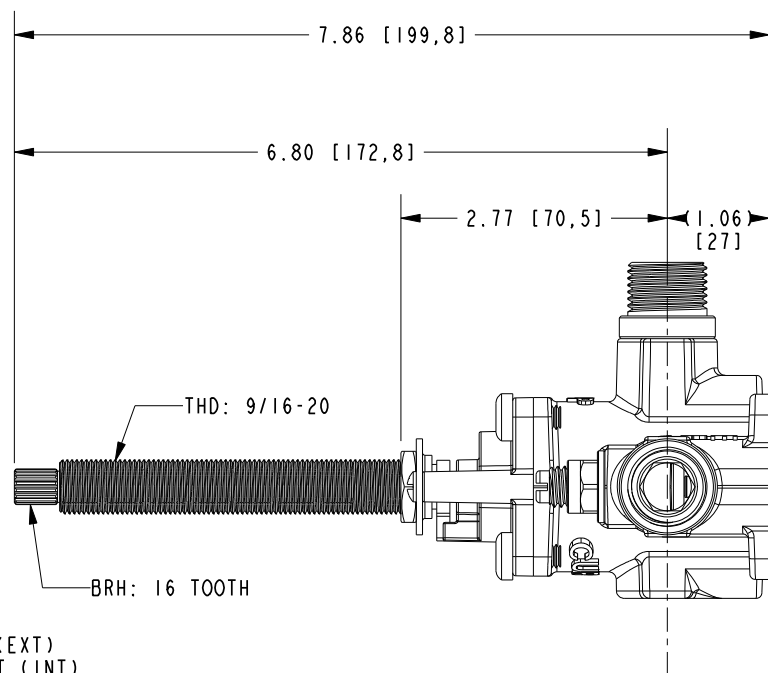

t: 949.417.5207 | www.newportbrass.com
©2025 NewportBrass