



NOTES:

- (N1) 1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.
 (N2) 2 APPLY LIGHT FILM OF DOW III CRONING SILICON GREASE
 (N3) 3 APPLY PERMANENT THREAD LOCKER (LOCTITE 680)

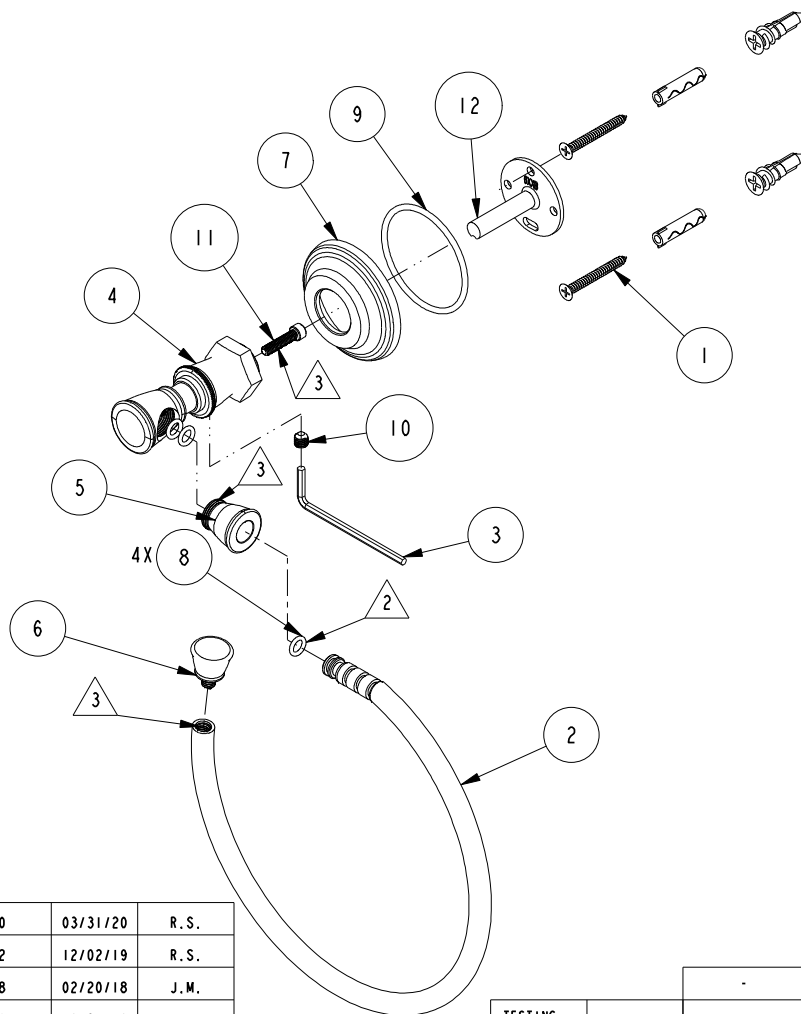

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	1-206	HARDWARE PACK	ASSEMBLY	1
2	7-731	TOWEL RING	ASSEMBLY	1
3	10615	HEX KEY, 3MM ALLOY STEEL	PART	1
4	40535	POST	PART	1
5	40536	FINIAL	PART	1
6	40538	RING CAP	PART	1
7	40553	ESCUTCHEON	PART	1
8	91049	O-RING, #2- 010, EPDM, 65-75 DURO, NSF 61	PART	4
9	91756	O-RING #2-134, EP, 50 DURO - GREY	PART	1
10	92031	SCRW, M6 X 1 X 6 SKT HD CUP PT W/ SELF LOC SS	PART	1
11	92528	SCRW, 8-32 X 3/4 SKT CAP HD SS	PART	1
12	6XXB	MOUNTING BRACKET	PART	1

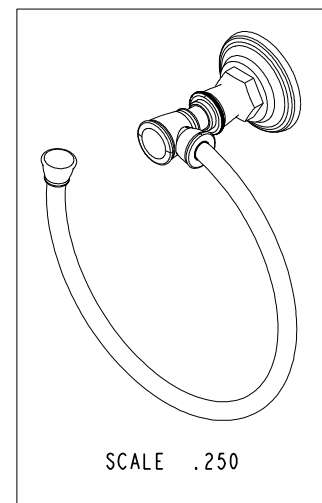



-	G	EN-4150	03/31/20	R.S.
-	F	EN-4032	12/02/19	R.S.
-	E	EN-3538	02/20/18	J.M.
-	D	EN-3169	10/21/16	J.M.
-	C	EN-3112	08/15/16	J.M.
-	B	EN-3089	06/30/16	J.M.
-	A	EN-2717	04/16/14	J.M.
-	-	EN-2086	09/01/13	-
ZONE	REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC.
 THESE DRAWINGS AND THE DESIGNS
 DEPICTED HEREIN ARE THE PROPRIETARY
 PROPERTY OF BRASSTECH. ANY USE
 OR REPRODUCTION IS SUBJECT TO
 THE EXPRESS APPROVAL OF BRASSTECH.
 UNAUTHORIZED USE IS STRICTLY
 PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #		REMOVE ALL BURRS AND SHARP EDGES	

UNITS ARE: INCHES [MM]	
FRACTIONS DECIMALS ANGLES	
±1/16"	±.1 [2.5]
±.001	±.006 [1.5]
(X.XXX) DENOTES CRITICAL DIMS.	
ALL THREADS ARE CRITICAL	
DRAWN	-
CHECKED	-
APPROVED	-

BRASSTECH		2001 CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
INCORPORATED		TOWEL RING	
DWG NO.	4821	REV	G
SCALE	.300	REF.	-
SHEET	1	OF	2

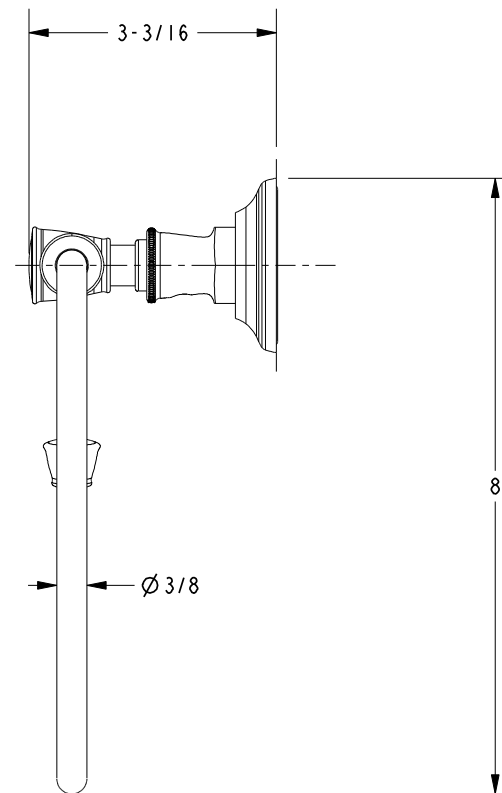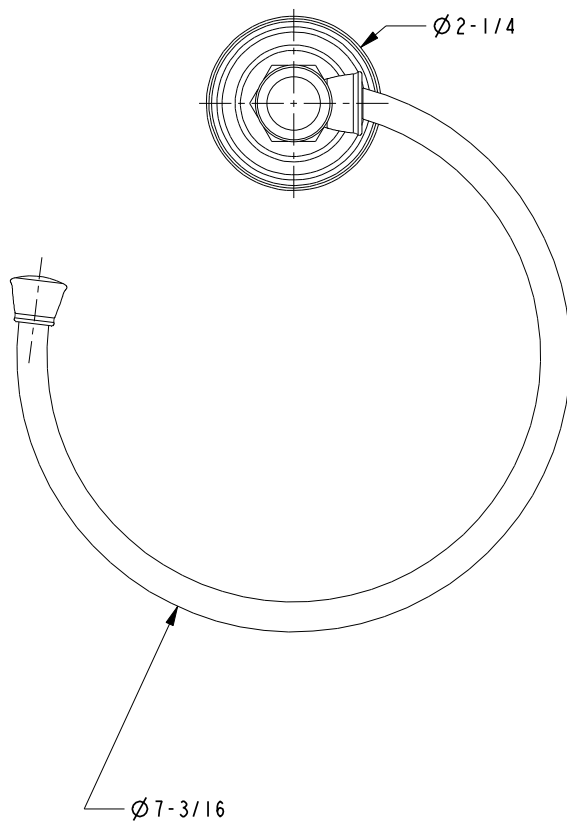

BRASSTECH		2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
DWG NO.	4821	REV	G
SCALE	.400	REF.	-
SHEET 2 OF 2			