


NOTES:

(N1) 1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.

2 APPLY LOCTITE 680.

(N3) 3. PLACE ITEMS# 2 AND 10 IN A SEPARATE BAG

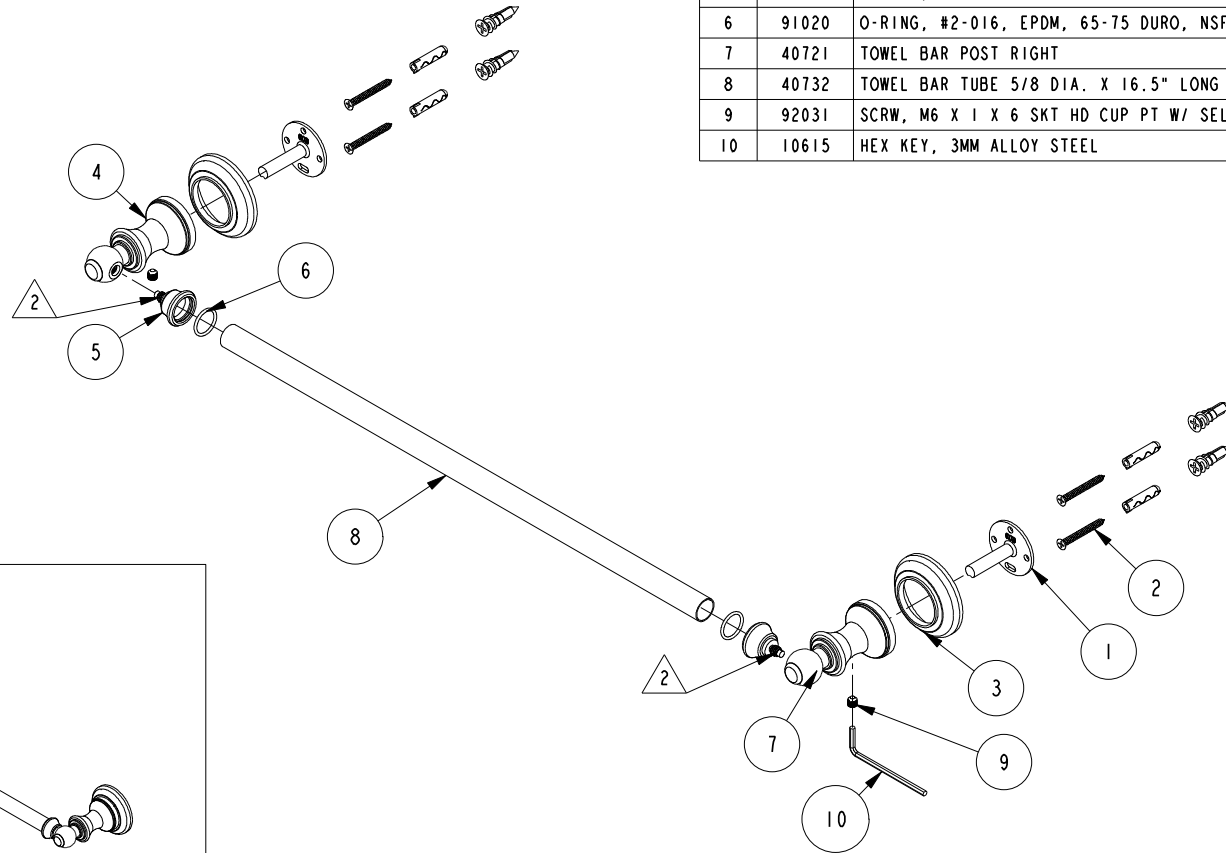


SCALE .125

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	6XXB	MOUNTING BRACKET	PART	2
2	1-206	HARDWARE PACK	ASSEMBLY	2
3	2-656	HANDLE ESCUTCHEON ASM	ASSEMBLY	2
4	40720	TOWEL BAR POST LEFT	PART	1
5	40734	FINIAL, TOWEL BAR	PART	2
6	91020	O-RING, #2-016, EPDM, 65-75 DURO, NSF 61	PART	2
7	40721	TOWEL BAR POST RIGHT	PART	1
8	40732	TOWEL BAR TUBE 5/8 DIA. X 16.5" LONG	PART	1
9	92031	SCRW, M6 X 1 X 6 SKT HD CUP PT W/ SELF LOC SS	PART	2
10	10615	HEX KEY, 3MM ALLOY STEEL	PART	1

		-	-
TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #		REMOVE ALL BURRS AND SHARP EDGES	

UNITS ARE: INCHES [MM]		
TOLERANCES ARE:		
FRACTIONS	DECIMALS	ANGLES
±1/16"	.XX ±.06 [1,5]	±1°
X.XXX	DENOTES CRITICAL DIMS.	
ALL THREADS ARE CRITICAL		
DRAWN	R.S.	06/21/19
CHECKED	J.M.	06/21/19
APPROVED	J.M.	06/21/19

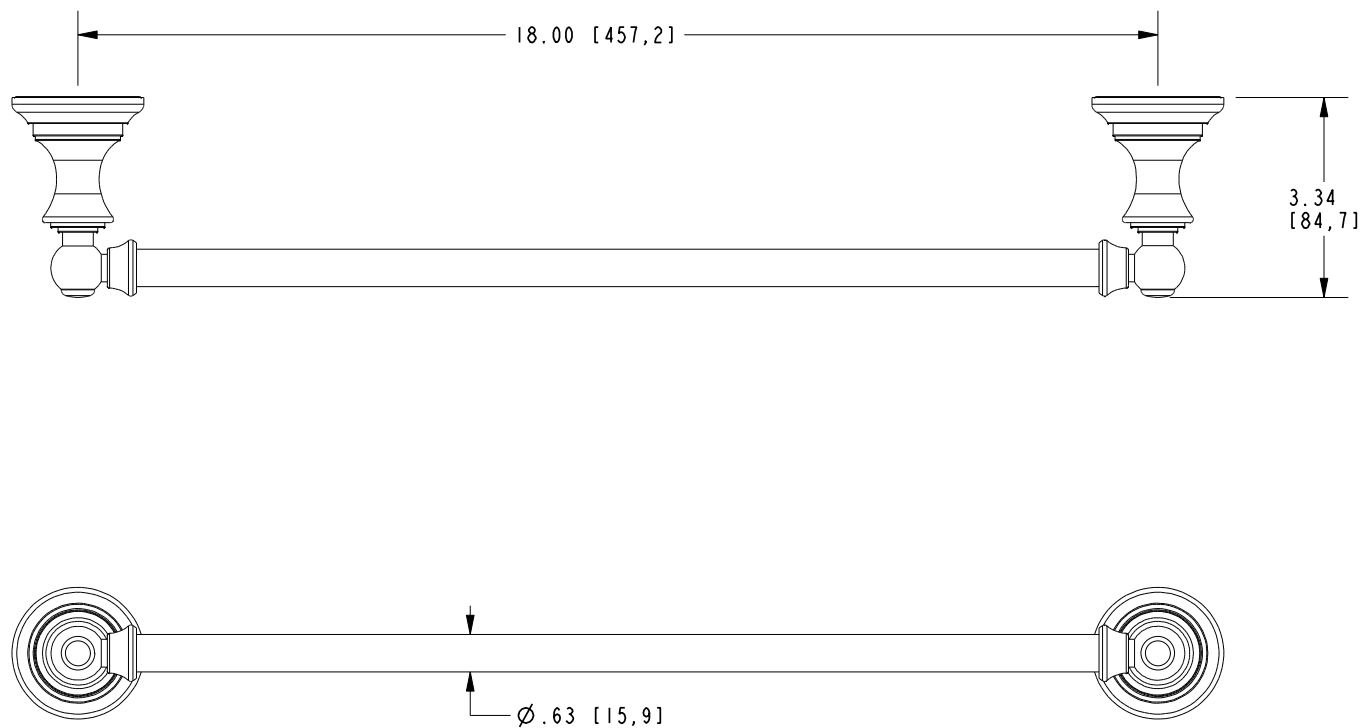

BRASSTECH		2001 E. CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
DWG NO.	5602	REV	-
SCALE	.312	REF.	-
SHEET 2		OF 2	