


NOTES:

- (N1) 1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.
2. APPLY PERMANENT THREAD LOCKER (LOCTITE 262).
3. DURING FINAL ASSEMBLY: APPLY THIN LAYER OF (LOCTITE 404) AFTER O-RINGS ARE INSTALLED AND JUST BEFORE THE TOWEL BAR.

BILL OF MATERIAL (CURRENT LEVEL)

| ITEM | PT/ASSY | DESCRIPTION                               | TYPE     | QTY. |
|------|---------|-------------------------------------------|----------|------|
| 1    | 45XX    | MOUNTING FLANGE                           | PART     | 2    |
| 2    | 4500    | ROSETTE                                   | PART     | 2    |
| 3    | 92308   | SCRW, M5 X 5 SKT HD CUP PT W/ SELF LOC SS | PART     | 2    |
| 4    | 10888   | HEX KEY, 2.5MM ALLOY STEEL                | PART     | 1    |
| 5    | 4550P   | TOWEL BAR/ TISSUE HOLDER POST             | PART     | 2    |
| 6    | 4550F   | POST FLANGE                               | PART     | 2    |
| 7    | RM16-1  | 16mm ID x 1mm BUNA-N- O-RING              | PART     | 2    |
| 8    | 4554    | TOWEL BAR TUBE                            | PART     | 1    |
| 9    | 1-206   | HARDWARE PACK                             | ASSEMBLY | 2    |

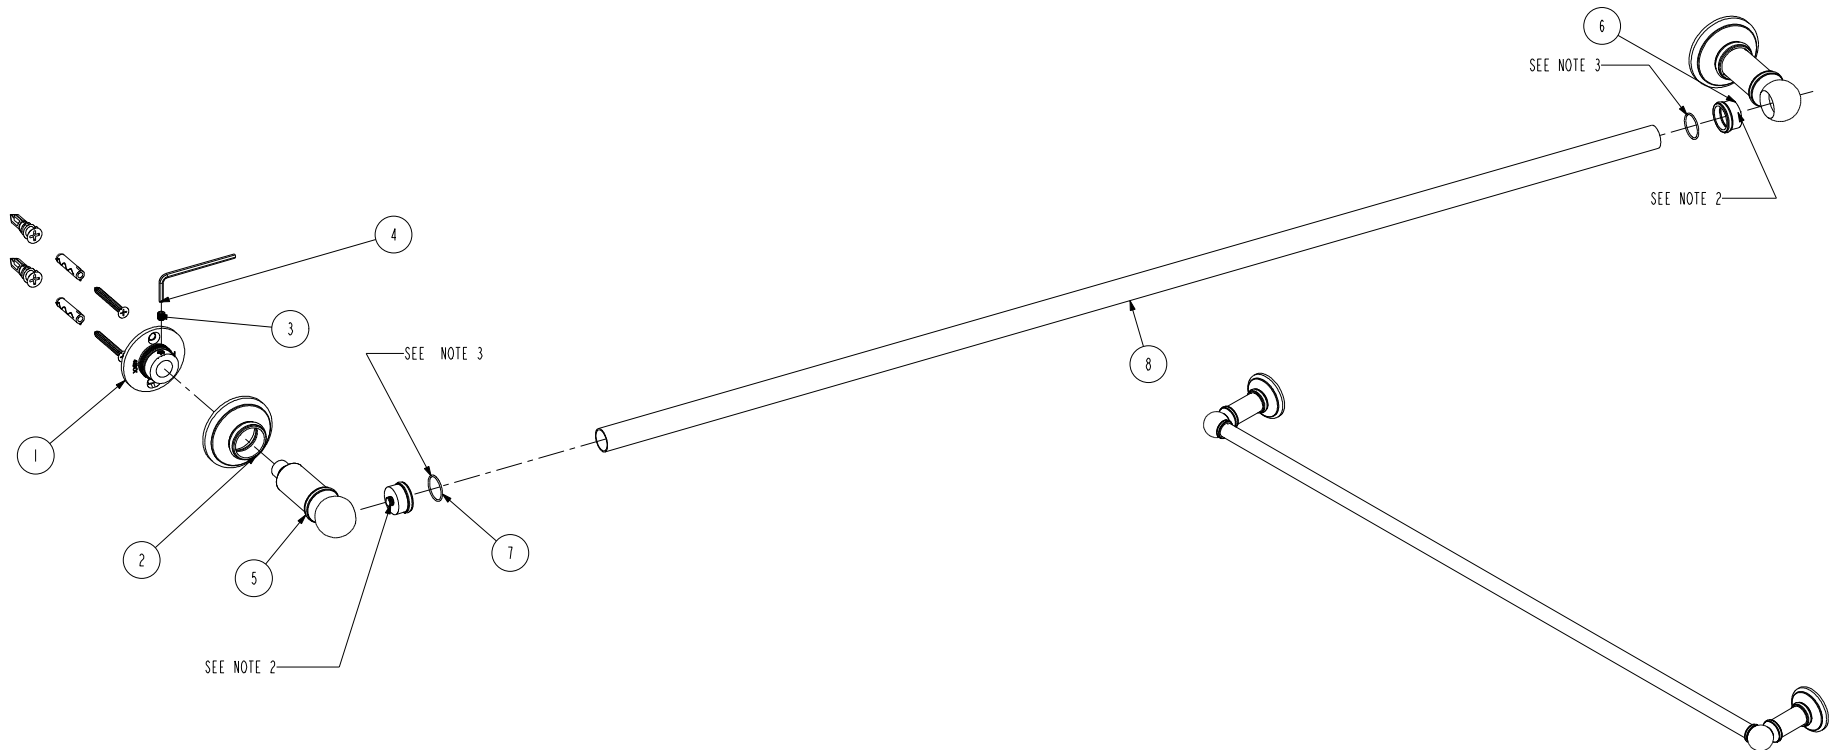

SCALE 0.125


|                   |   |                                  |         |
|-------------------|---|----------------------------------|---------|
|                   |   | -                                | -       |
| TESTING           | - | -                                | -       |
| ASSEMBLY          | - | -                                | -       |
| PLATING           | - | -                                | -       |
| POLISHING         | - | NEXT ASSY                        | USED ON |
| MACHINING         | - | APPLICATION                      |         |
| TOOLING FIXTURE # |   | REMOVE ALL BURRS AND SHARP EDGES |         |

|                                |                |
|--------------------------------|----------------|
| UNITS ARE: INCHES (MM)         |                |
| TOLERANCES ARE:                |                |
| FRACTIONS                      | DECIMALS       |
| ±1/16"                         | .1 ±.1 (2.5)   |
|                                | .12 ±.06 (1.5) |
| (X.XXX) DENOTES CRITICAL DIMS. |                |
| ALL THREADS ARE CRITICAL       |                |
| DRAWN                          | -              |
| CHECKED                        | -              |
| APPROVED                       | -              |

|                  |  |                                                             |              |
|------------------|--|-------------------------------------------------------------|--------------|
| <b>BRASSTECH</b> |  | 2001 CARNEGIE AVE.<br>SANTA ANA, CA 92705<br>(949) 417-5207 |              |
| INCORPORATED     |  | 32" TOWEL BAR ASS'Y                                         |              |
| DWG NO.          |  | 4504                                                        |              |
| SCALE 0.077      |  | REF. -                                                      | SHEET 1 OF 2 |

COPYRIGHT 2005 BRASSTECH, INC.  
THESE DRAWINGS AND THE DESIGNS  
DEPICTED HEREIN ARE THE PROPRIETARY  
PROPERTY OF BRASSTECH. ANY USE  
OR REPRODUCTION IS SUBJECT TO  
THE EXPRESS APPROVAL OF BRASSTECH.  
UNAUTHORIZED USE IS STRICTLY  
PROHIBITED. ALL RIGHTS RESERVED.

|      |     |             |          |          |
|------|-----|-------------|----------|----------|
| -    | B   | EN-4032     | 11/25/19 | R.S.     |
| -    | A   | -           | 06/28/07 | -        |
| ZONE | REV | DESCRIPTION | DATE     | APPROVED |

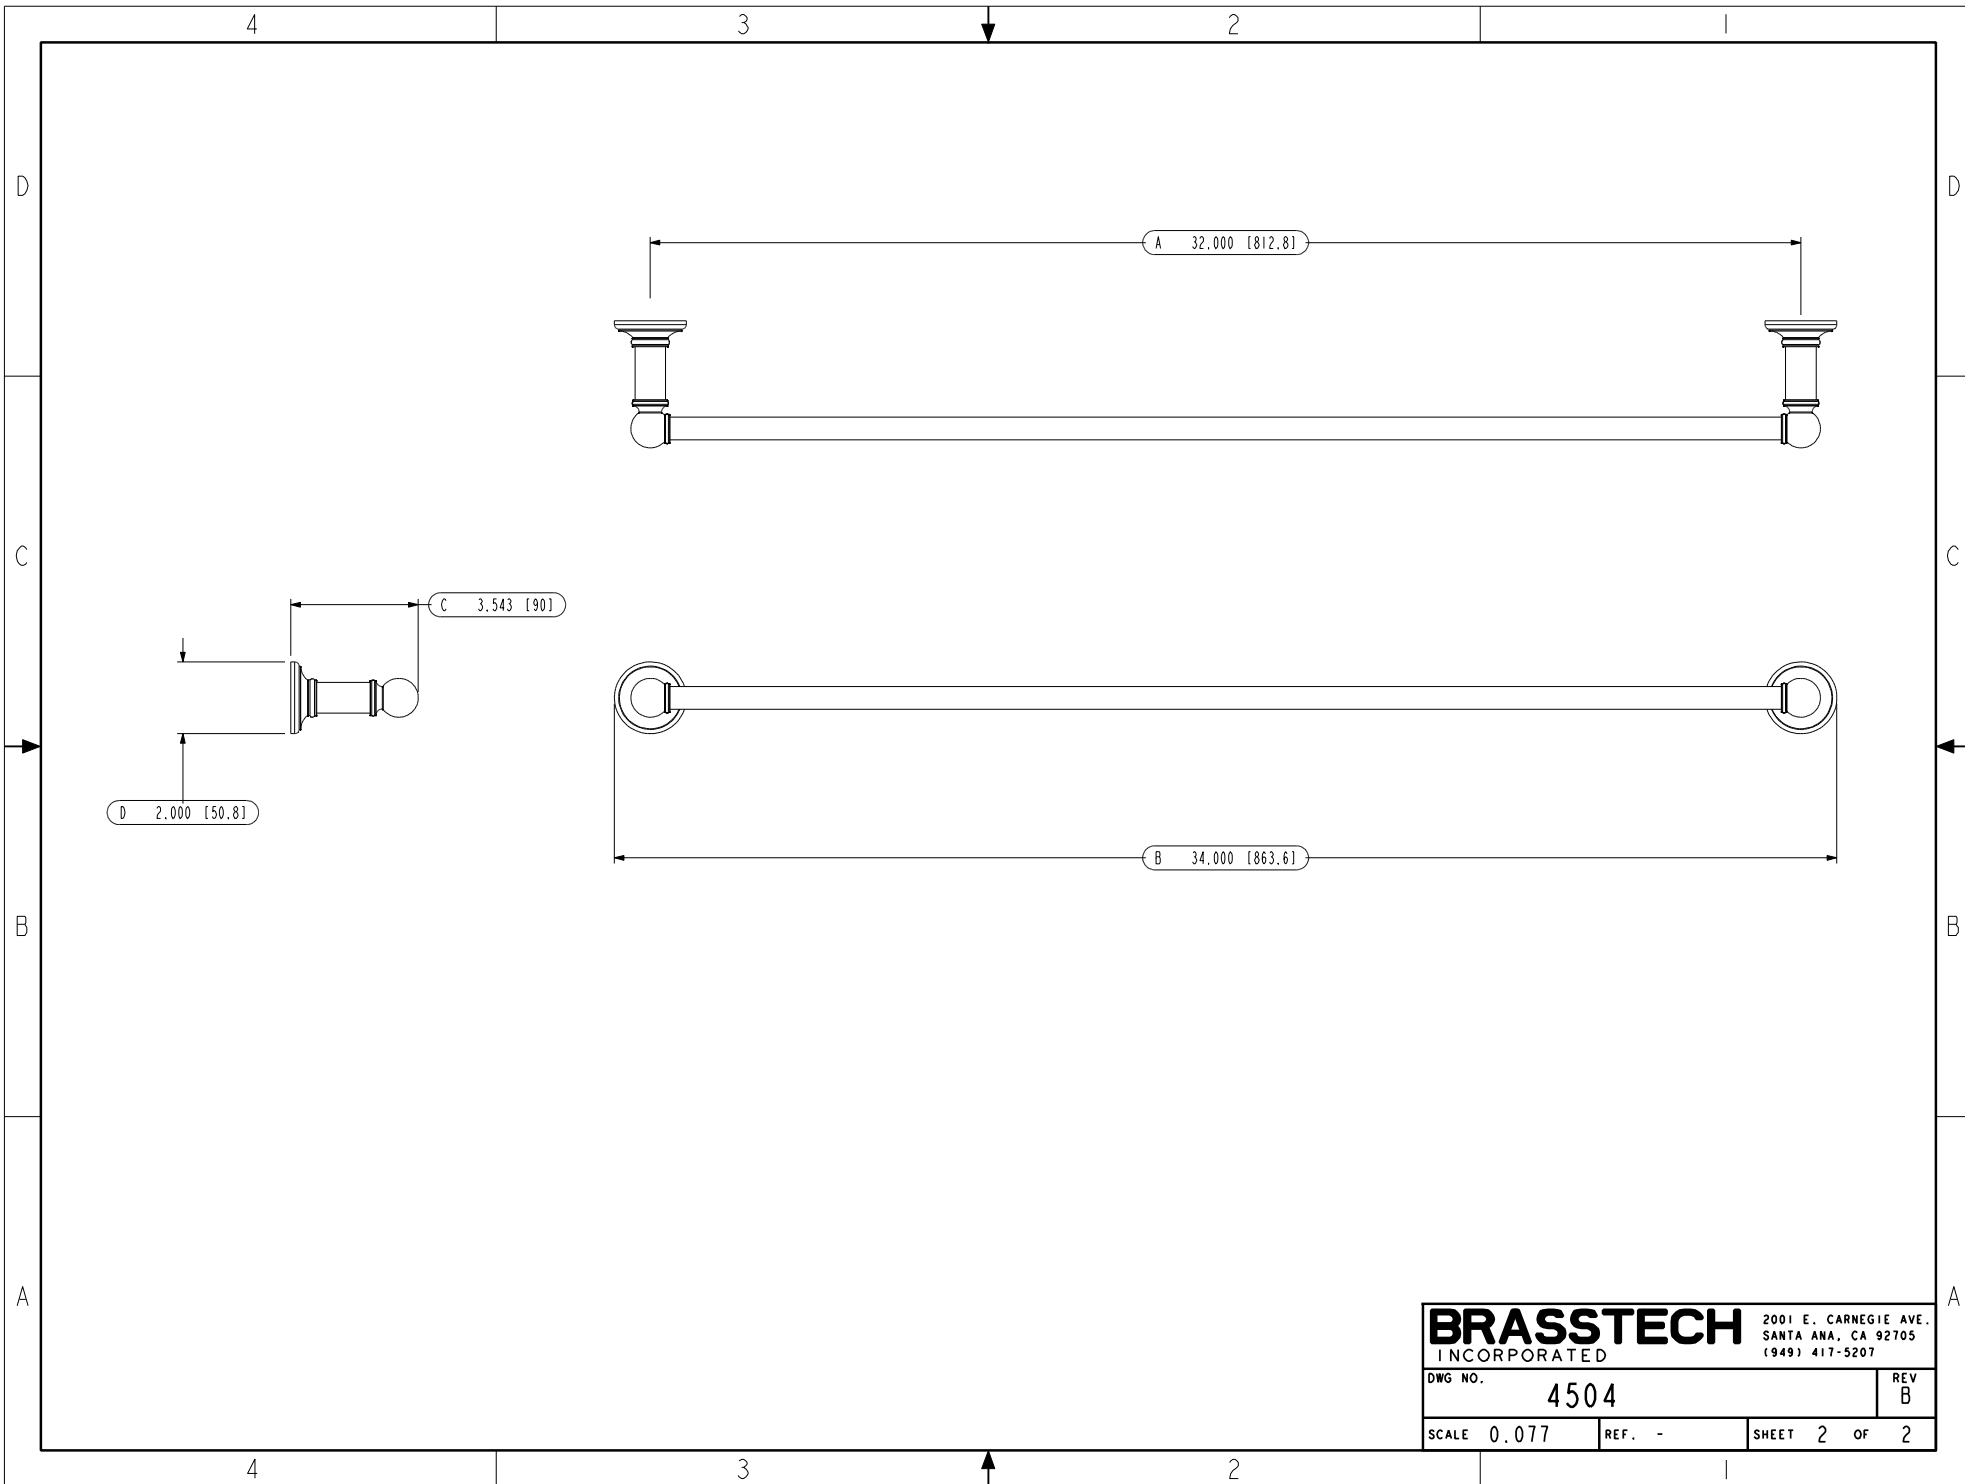

|                  |        |                                                                |  |
|------------------|--------|----------------------------------------------------------------|--|
| <b>BRASSTECH</b> |        | 2001 E. CARNEGIE AVE.<br>SANTA ANA, CA 92705<br>(949) 417-5207 |  |
| DWG NO. 4504     |        | REV B                                                          |  |
| SCALE 0.077      | REF. - | SHEET 2 OF 2                                                   |  |