

California Faucets®

Davoli®

Single Handle Combo Hot & Cold Water Dispenser

Features

- 25+ artisan finished including 10+ PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9623-K10-XX

9623-K10-33 shown




XX = Denotes handle style

Through-Hole Specifications

Min	Recommended	Max
Ø1-9/16"	Ø1-5/8"	Ø1-13/16"
[40]	[41]	[46]

DIMENSIONS		
XX HDL	A	B
33	4-7/8" [124]	2" [51]
35	4-7/8" [124]	2" [51]
48	4-7/8" [124]	2" [51]
61	4-7/8" [124]	2" [51]

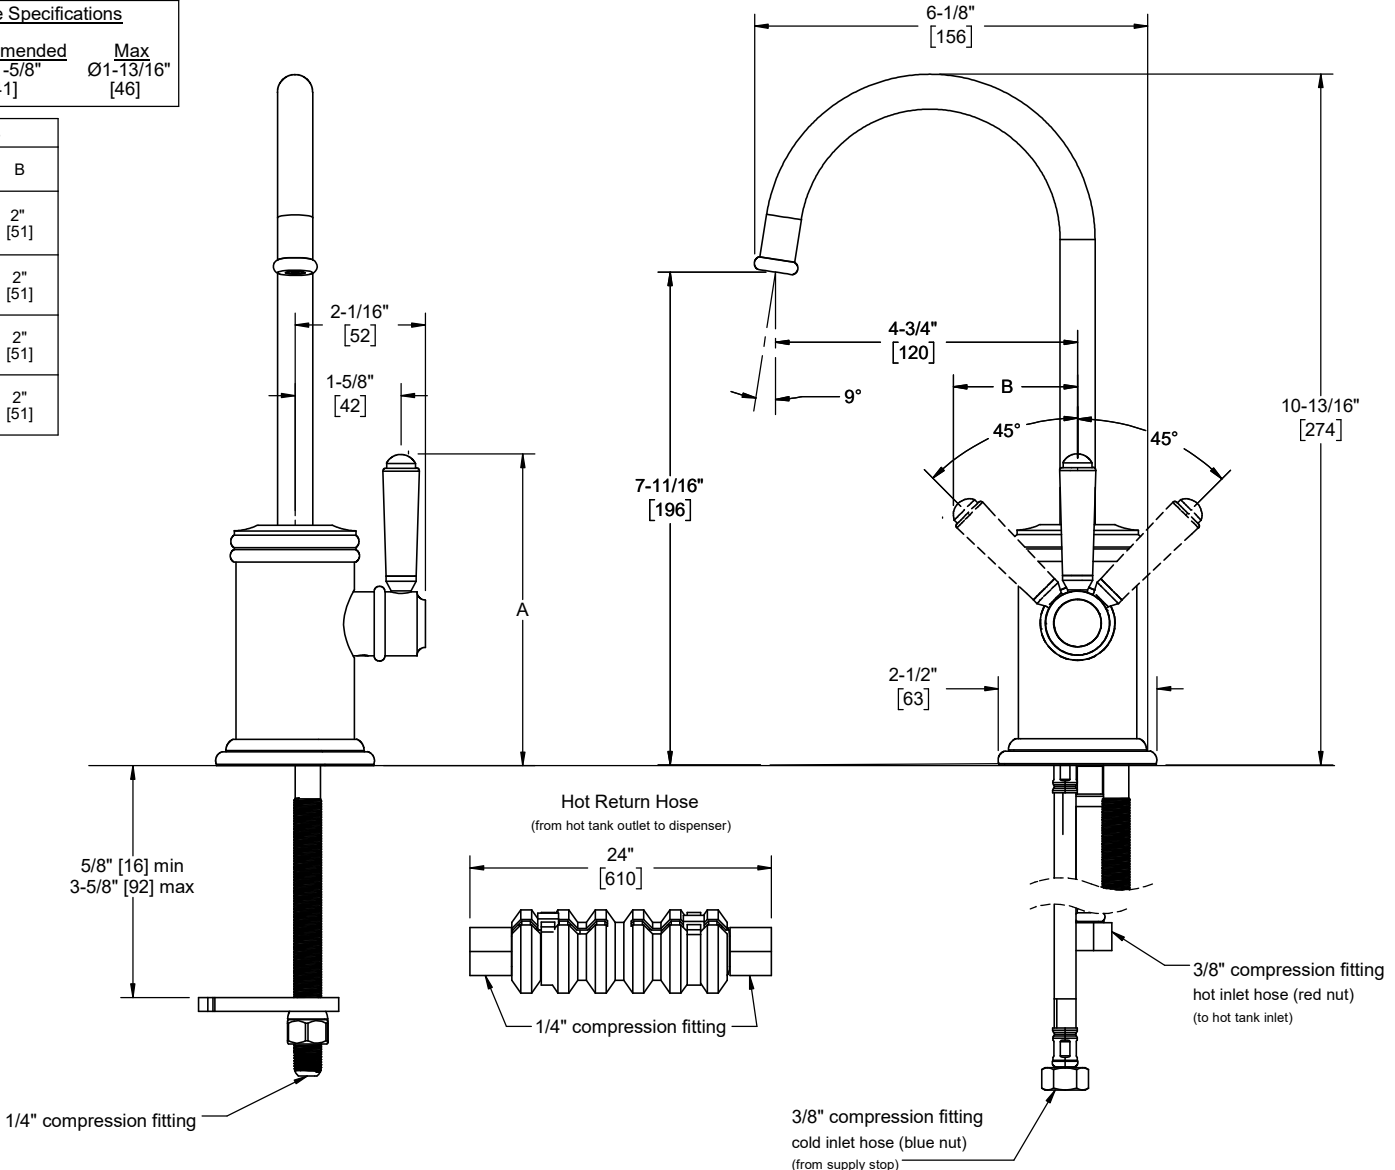

supply line flow restrictor for 3/8" compression fitting 9/16"-24 male & female

couplings are to be used on hot tank
 1@ 1/4" tank outlet to hot return hose
 1@ 3/8" tank inlet to tank inlet hose

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]