

Single Handle Combo Hot & Cold Water Dispenser

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately


Codes/Standards Applicable

Product meets or exceeds the following:

- *ASME A112.18.1/CSA B125.1*
- *NSF 61, NSF 372, CEC, & DOE*
- *Commonwealth of MA*
- *ADA compliant*



9623-K30-SL shown

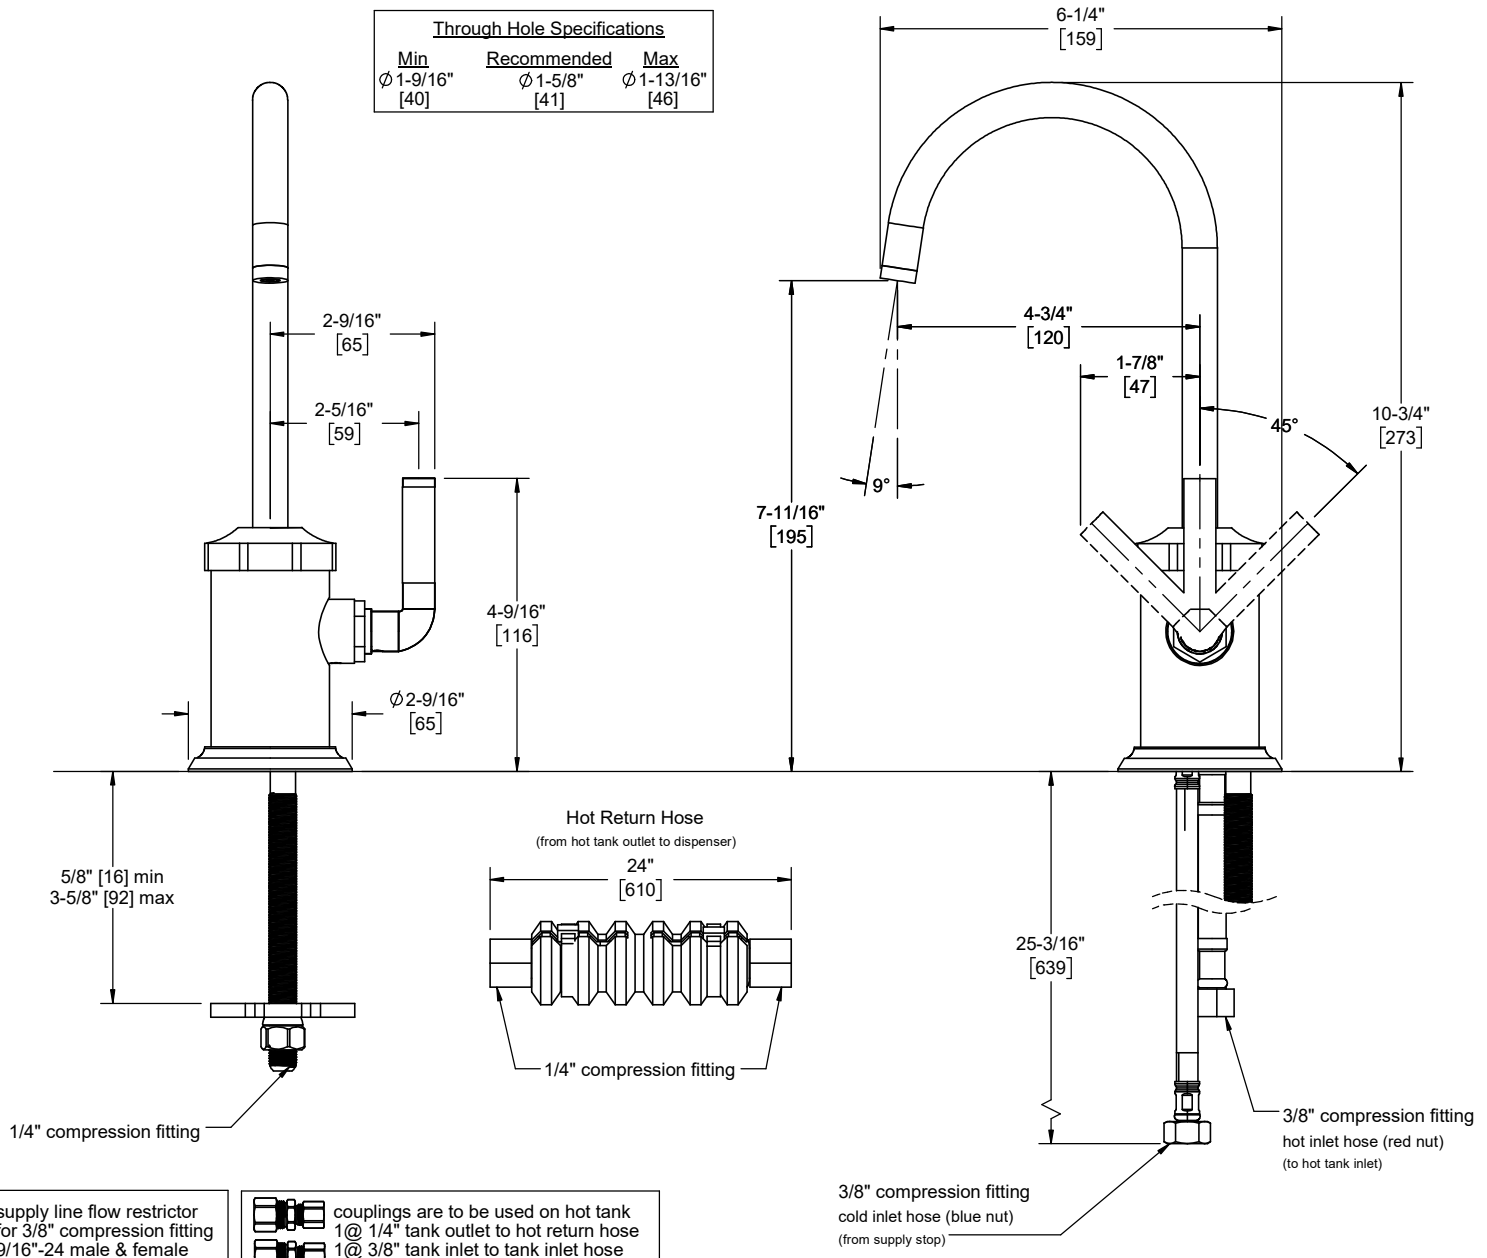

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]